

OIL ANALYSIS REPORT

Zinc

West Virginia [West Virginia] Oil - Starboard Genset Component

Starboard Genset

MARATHON 15W40 (8 GAL)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

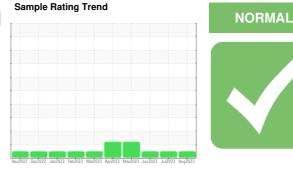

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0769031	WC0735656	WC0769154
Sample Date		Client Info		06 Aug 2023	10 Jul 2023	12 Jun 2023
Machine Age	hrs	Client Info		24851	24493	24001
Oil Age	hrs	Client Info		1500	933	500
Oil Changed		Client Info		Changed	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	J	method	limit/base	current	history1	history2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>25	5	4	3
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>10	4	2	1
Lead	ppm	ASTM D5185m	>10	<1	0	<1
Copper	ppm	ASTM D5185m	>20	1	<1	<1
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		190	219	267
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		110	113	103
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		805	833	729
Calcium	ppm	ASTM D5185m		1476	1555	1443
Phosphorus	ppm	ASTM D5185m		717	741	679
Zino	0000	ACTM DE10Em		000	0.26	950

Sulfur	ppm	ASTM D5185m		2987	3183	2934
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	4
Sodium	ppm	ASTM D5185m		<1	<1	1
Potassium	ppm	ASTM D5185m	>20	0	<1	0

888

936


850


ppm ASTM D5185m

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.3	8.9	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	22.5	22.1
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	17.9	15.9
Base Number (BN)	mg KOH/g	ASTM D2896		8.65	13.09	9.96




OIL ANALYSIS REPORT

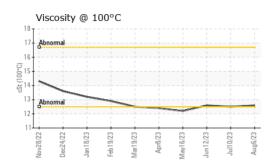

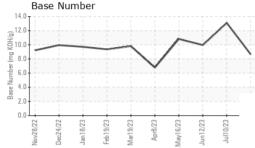

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445		12.6	12.5	12.6
GRAPHS						

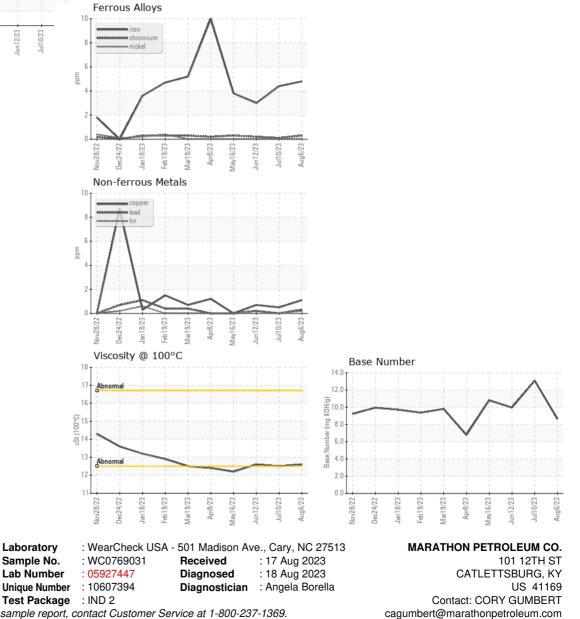

Certificate L2367

F: x:

T: (606)585-3950