

OIL ANALYSIS REPORT

Sample Rating Trend



SCHINDLER 3

Component Hydraulic System Fluid DURALENE ELEVATOR 10 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 | |
|------------------|--------|-------------|--------------------------------------|-------------|-------------|----------|--|
| Sample Number | | Client Info | | DC0028547 | DC0028553 | | |
| Sample Date | | Client Info | | 09 Aug 2023 | 07 Jul 2023 | | |
| Machine Age | hrs | Client Info | | 0 | 0 | | |
| Oil Age | hrs | Client Info | | 0 | 0 | | |
| Oil Changed | | Client Info | | N/A | N/A | | |
| Sample Status | | | | NORMAL | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 | |
| Iron | ppm | ASTM D5185m | >20 | 3 | 3 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 3 | 4 | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | <1 | | |
| Copper | ppm | ASTM D5185m | >75 | 10 | 10 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 | |
| Boron | ppm | ASTM D5185m | | 3 | 8 | | |
| Barium | ppm | ASTM D5185m | | 6 | 2 | | |
| Molybdenum | ppm | ASTM D5185m | | 1 | 1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 8 | 8 | | |
| Calcium | ppm | ASTM D5185m | | 1956 | 1903 | | |
| Phosphorus | ppm | ASTM D5185m | | 801 | 804 | | |
| Zinc | ppm | ASTM D5185m | | 965 | 948 | | |
| Sulfur | ppm | ASTM D5185m | | 4949 | 5205 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 | |
| Silicon | ppm | ASTM D5185m | >20 | 4 | 3 | | |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 2 | | |
| VISUAL | | method | limit/base | current | history1 | history2 | |
| White Metal | scalar | *Visual | NONE | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | | |
| Free Water | scalar | *Visual | | NEG | NEG | | |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 | |
| Visc @ 40°C | cSt | ASTM D445 | | 37.4 | 37.3 | | |
| 0:36:32) Rev: 1 | | | Contact/Location: R. SNYDER - POTWAS | | | | |



OIL ANALYSIS REPORT

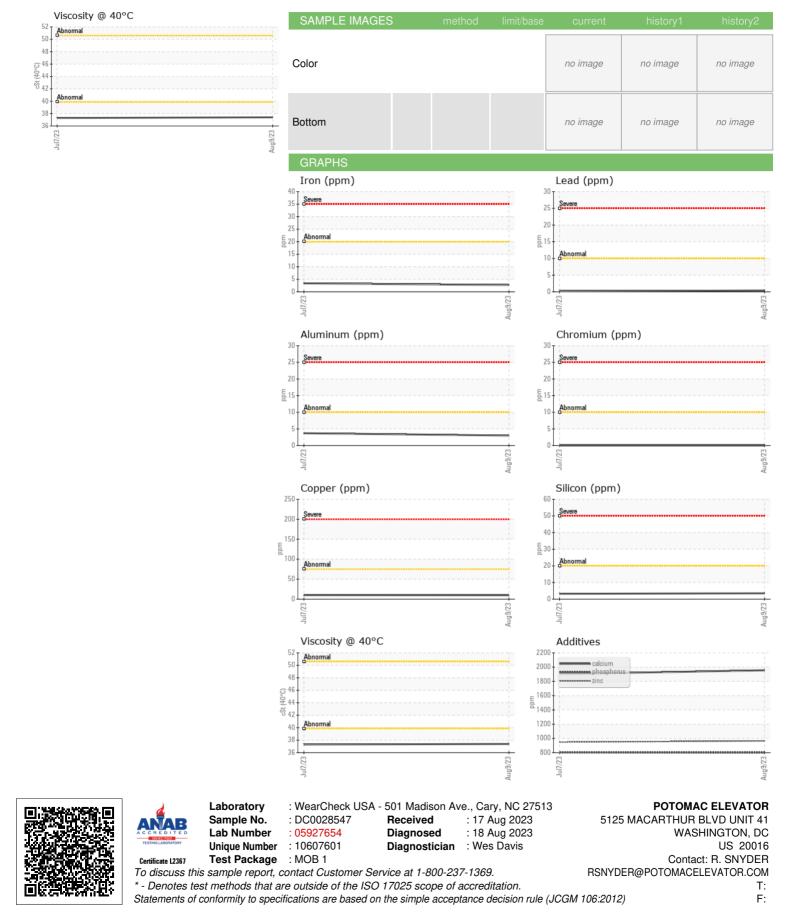

Contact/Location: R. SNYDER - POTWAS