




# PROBLEM SUMMARY

Sample Rating Trend

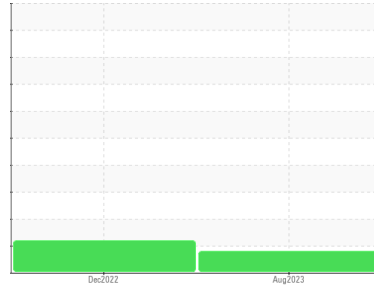

ISO




Machine Id  
**KAESER 7219506**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

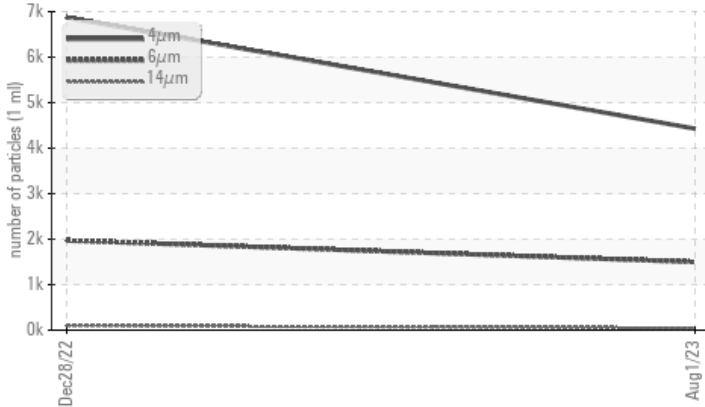

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	ATTENTION	---
Particles >6µm	ASTM D7647	>1300	▲ 1498	▲ 1970	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/18/13	▲ 20/18/14	---

Customer Id: CONSALKC  
Sample No.: KC05927835  
Lab Number: 05927835  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

**28 Dec 2022 Diag: Don Baldrige**

ISO




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

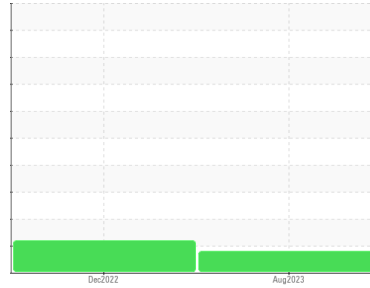

ISO



Machine Id  
**KAESER 7219506**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

**DIAGNOSIS**

**Recommendation**

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC05927835</b>	KC104139	---
Sample Date	Client Info			<b>01 Aug 2023</b>	28 Dec 2022	---
Machine Age	hrs	Client Info		<b>16897</b>	14112	---
Oil Age	hrs	Client Info		<b>0</b>	3218	---
Oil Changed	Client Info			<b>N/A</b>	Not Changd	---
Sample Status				<b>ATTENTION</b>	ATTENTION	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>10</b>	8	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m	90	<b>0</b>	4	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	90	<b>9</b>	18	---
Calcium	ppm	ASTM D5185m	2	<b>3</b>	0	---
Phosphorus	ppm	ASTM D5185m		<b>5</b>	2	---
Zinc	ppm	ASTM D5185m		<b>16</b>	13	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>3</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	---
Water	%	ASTM D6304	>0.05	<b>0.007</b>	0.008	---
ppm Water	ppm	ASTM D6304	>500	<b>75.6</b>	84.6	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>4428</b>	6872	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 1498</b>	▲ 1970	---
Particles >14µm		ASTM D7647	>80	<b>43</b>	▲ 100	---
Particles >21µm		ASTM D7647	>20	<b>10</b>	19	---
Particles >38µm		ASTM D7647	>4	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>▲ 19/18/13</b>	▲ 20/18/14	---


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.30</b>	0.29	---

# OIL ANALYSIS REPORT


### ▲ Particle Trend

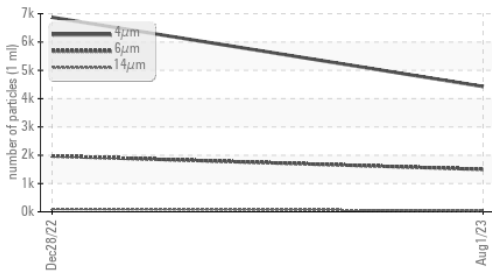


### Water

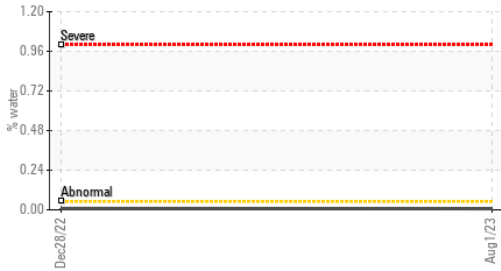


### Acid Number

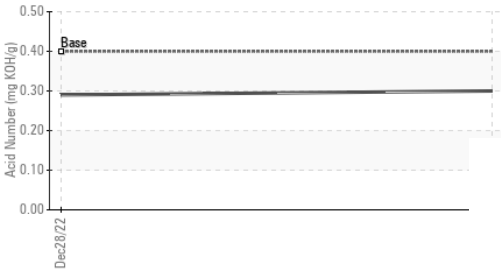

### Water

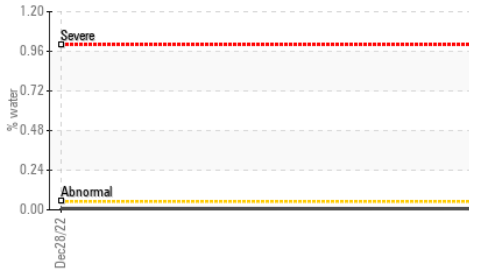


### Viscosity @ 40°C

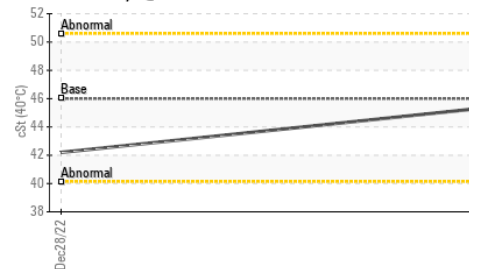





PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.4	42.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

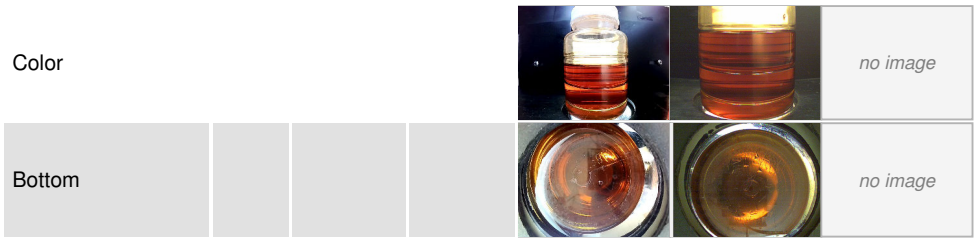

### GRAPHS

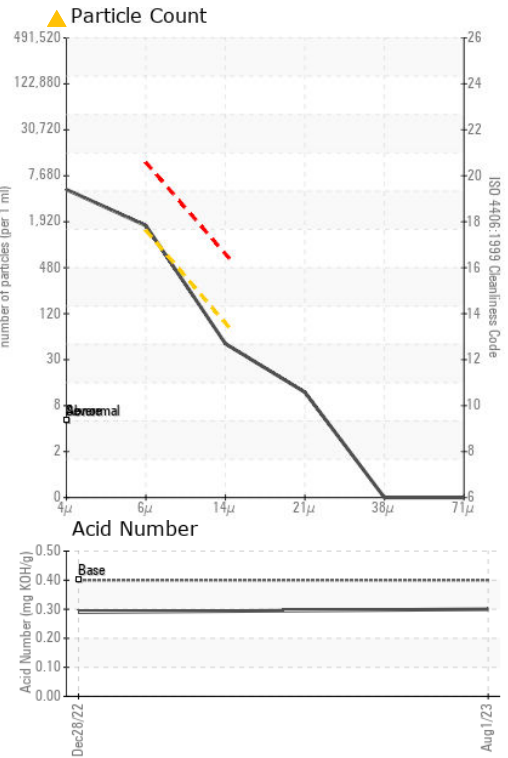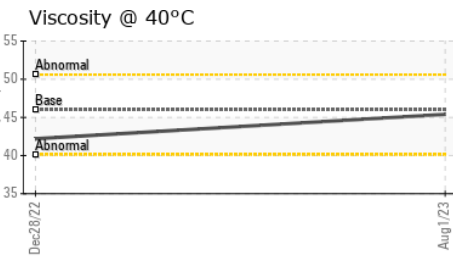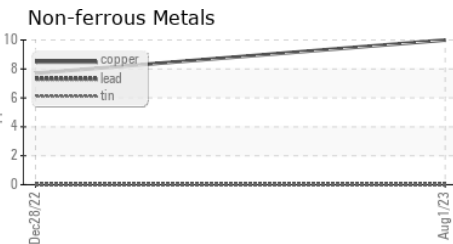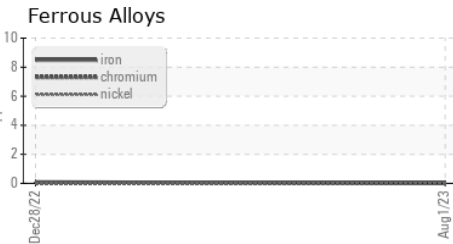

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC05927835 **Received** : 17 Aug 2023  
**Lab Number** : 05927835 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10607782 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**CONKLIN CARS**  
 2700 S 9TH ST  
 SALINA, KS  
 US 67401  
 Contact: C JONES  
 C.JONES@CONKLINCARS.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: