


## **PROBLEM SUMMARY**

## KAESER AIR CENTER SX6 5106907 (S/N 2784)

Compressor

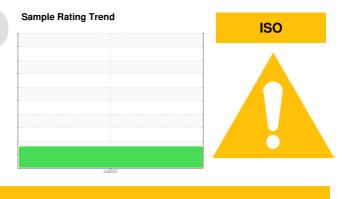

#### KAESER SIGMA (OEM) S-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY



#### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	 
Particles >6µm	ASTM D7647 >1	300 🔺 6067	 
Particles >14µm	ASTM D7647 >8	<b>60 472</b>	 
Particles >21µm	ASTM D7647 >2	.0 🔺 69	 
Oil Cleanliness	ISO 4406 (c) >	-/17/13 🔺 21/20/16	 

Customer Id: HUBMAN Sample No.: KCP46347 Lab Number: 05927838 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>


*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Change Fluid			?	Oil and filter change at the time of sampling has been noted.	
Change Filter			?	Oil and filter change at the time of sampling has been noted.	

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

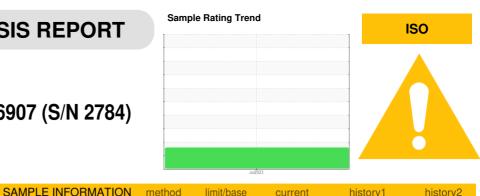

#### Machine Id KAESER AIR CENTER SX6 5106907 (S/N 2784) Component

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP46347		
Sample Date		Client Info		27 Jul 2023		
Machine Age	hrs	Client Info		6910		
Oil Age	hrs	Client Info		6910		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m		5		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		د <1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron Barium	ppm	ASTM D5185m	00	0		
	ppm	ASTM D5185m	90			
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m	00	0		
Magnesium	ppm	ASTM D5185m	90	33 2		
Calcium	ppm	ASTM D5185m	2	3		
Phosphorus Zinc	ppm	ASTM D5185m		2		
Sulfur	ppm	ASTM D5185m ASTM D5185m		2 20111		
	ppm			20111		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.017		
ppm Water	ppm	ASTM D6304	>500	173.8		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		11702		
Particles >6µm		ASTM D7647	>1300	<b>6067</b>		
Particles >14µm		ASTM D7647	>80	<b>472</b>		
Particles >21µm		ASTM D7647	>20	<mark>/</mark> 69		
Particles >38µm		ASTM D7647	>4	3		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/20/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.29		



12k


.10 []m

nber of particles (1 8 61 4 21 0

#### Built for a lifetime."

# 🔺 Particle Trend 4μm 6μm 14µm Jul27/23



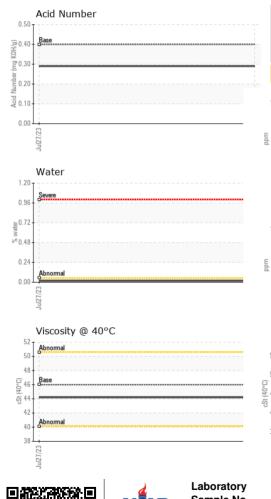

## **OIL ANALYSIS REPORT**

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.2		
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				a	no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			_	Particle Count		
iron			491,520	I		1 <sup>26</sup>
chromium			122,880	-		-24
New Mickel			30,720			+22
<u> </u>			7,680	1		-20 ह
27/721nL			Jul27/23 (per 1 ml)			-18 0 -16 0 -16 0 -14 1 -14 1 -14 -14 1 -14 1 -1
2			es		1	
Non-ferrous Metals	5		480			16
copper			jag 120	+		-14
tin			E 30			-12
2			8	Berevernal		10
23 23			2 1/23	-		
Jul27/23			Jul27/23	4μ 6μ		
Viscosity @ 40°C				Acid Number	14μ 21μ	38µ 71µ
Abnormal			(b)HO 30 (b)HO 40 (b)HO 30 (c) 40 (c)	Base		
Base			2 U.4U E O 30			
·						
) – denormal			D 0.10			
5 Li			0.00			~
Jul27/23			Jul27/23	Jul27/23		Jul27/23
WearCheck USA - 5 KCP46347 F 05927838 E	01 Madis Received Diagnose Diagnost	d : 17 /			774	FOLDING BOX NORFOLK ST ANSFIELD, MA US 02048

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Sample No. Lab Number **Unique Number Test Package** 

T:

F: