


OIL ANALYSIS REPORT

[000659] 7485411 (S/N 1270)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)





Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		De	2021	Dec2022 Aug20	23	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC05927841	KC100701	KC94166
Sample Date		Client Info		02 Aug 2023	13 Dec 2022	17 Dec 2021
Machine Age	hrs	Client Info		7054	5244	2800
Oil Age	hrs	Client Info		0	2444	2800
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	3	6	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	3	<1	23
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	53	34	44
Calcium	ppm	ASTM D5185m	2	2	<1	<1
Phosphorus	ppm	ASTM D5185m		<1	25	2
Zinc	ppm	ASTM D5185m		4	16	5
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	6
Sodium	ppm	ASTM D5185m		14	6	10
Potassium	ppm	ASTM D5185m	>20	5	3	11
Water	%	ASTM D6304	>0.05	0.024	0.008	0.013
ppm Water	ppm	ASTM D6304	>500	242.1	81.6	135.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1582	647	60438
Particles >6µm		ASTM D7647	>1300	500	151	<u>▲</u> 16035
Particles >14μm		ASTM D7647	>80	56	17	▲ 726
Particles >21µm		ASTM D7647	>20	17	9	▲ 82
Particles >38μm		ASTM D7647	>4	1	3	4
Particles >71μm		ASTM D7647		0	2	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13	17/14/11	<u>^</u> 21/17
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.34	0.328



OIL ANALYSIS REPORT

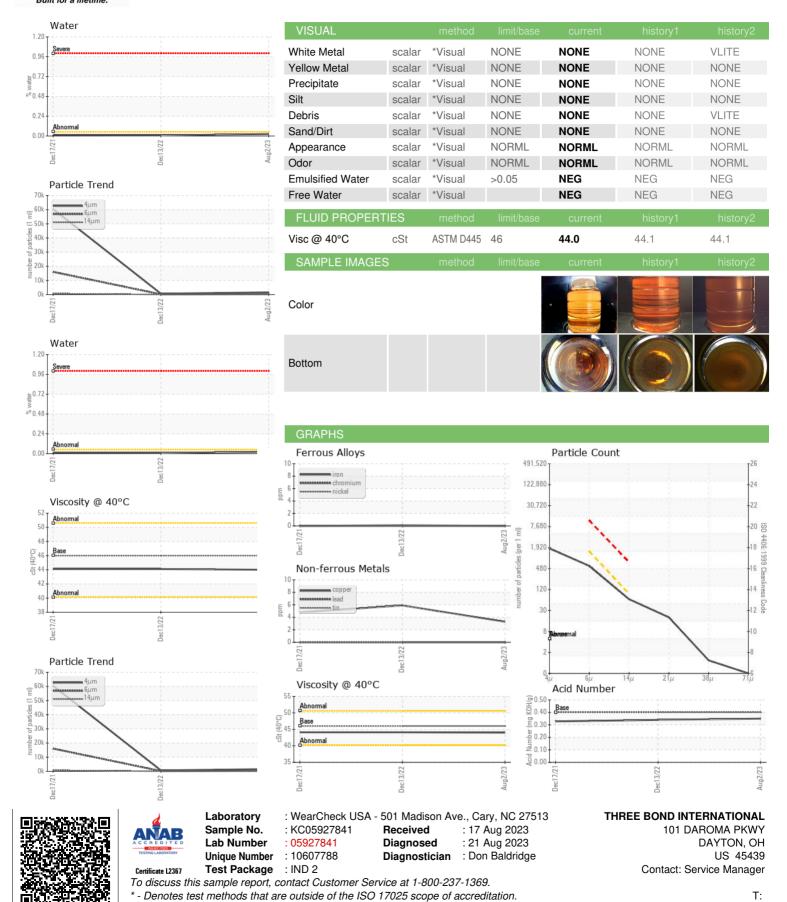

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: