




# OIL ANALYSIS REPORT



Area  
**KANSAS/44/EG - OTHER SERVICE**  
 Machine Id  
**74.21L [KANSAS^44^EG - OTHER SERVICE]**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

Sample Rating Trend

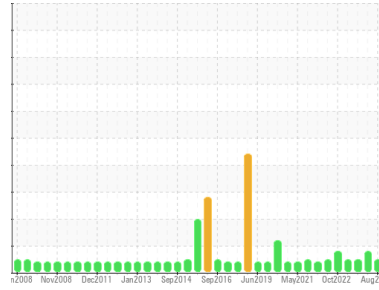

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Note that there appears to be a discrepancy in the total time on this component, when compared to the historical data. ( Customer Sample Comment: 14254 hrs )

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0819979</b>	WC0819879	WC0746869
Sample Date	Client Info		<b>10 Aug 2023</b>	17 Jul 2023	12 Jun 2023
Machine Age	hrs	Client Info	<b>41000</b>	14216	14025
Oil Age	hrs	Client Info	<b>13240</b>	13240	13240
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>7</b>	4	4
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>5</b>	3	1
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >75	<b>2</b>	<1	2
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>60</b>	45	49
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>15</b>	11	19
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 0	<b>217</b>	161	246
Calcium	ppm	ASTM D5185m	<b>3694</b>	2684	2262
Phosphorus	ppm	ASTM D5185m	<b>1307</b>	944	866
Zinc	ppm	ASTM D5185m	<b>1588</b>	1192	1045
Sulfur	ppm	ASTM D5185m	<b>6131</b>	5006	3895

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>10</b>	7	7
Sodium	ppm	ASTM D5185m	<b>0</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	2





## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>10504</b>	17207	6149
Particles >6µm	ASTM D7647	>2500	<b>1322</b>	▲ 3537	464
Particles >14µm	ASTM D7647	>640	<b>25</b>	43	25
Particles >21µm	ASTM D7647	>160	<b>6</b>	6	7
Particles >38µm	ASTM D7647	>40	<b>1</b>	1	1
Particles >71µm	ASTM D7647	>10	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	<b>21/18/12</b>	▲ 21/19/13	20/16/12

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.44</b>	1.44	1.29


# OIL ANALYSIS REPORT

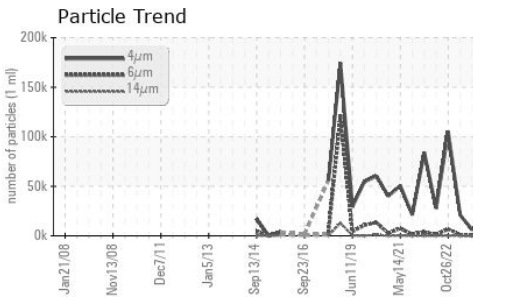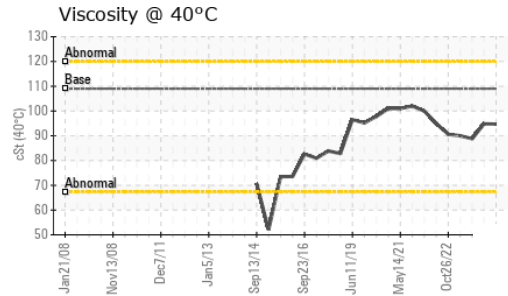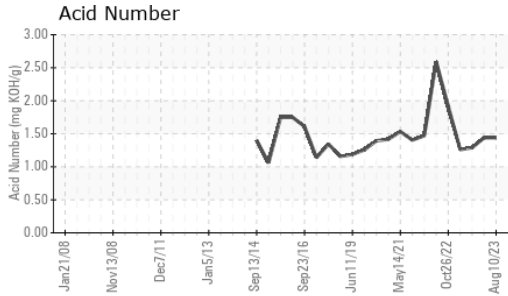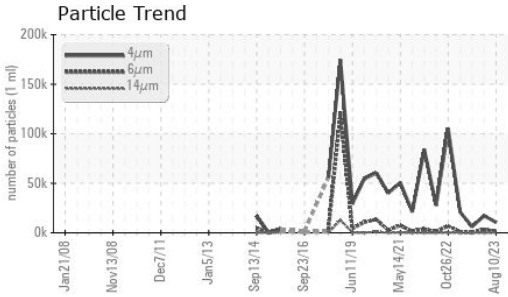





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	94.7	94.8	88.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

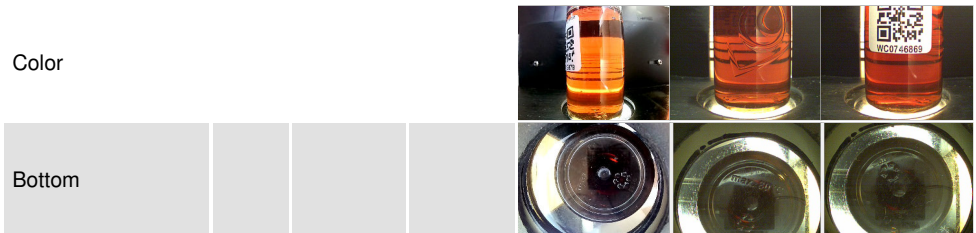

## GRAPHS

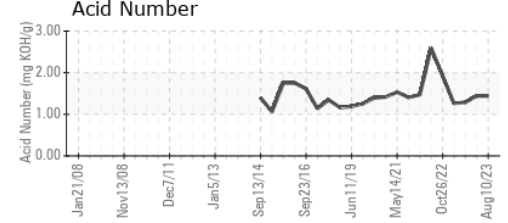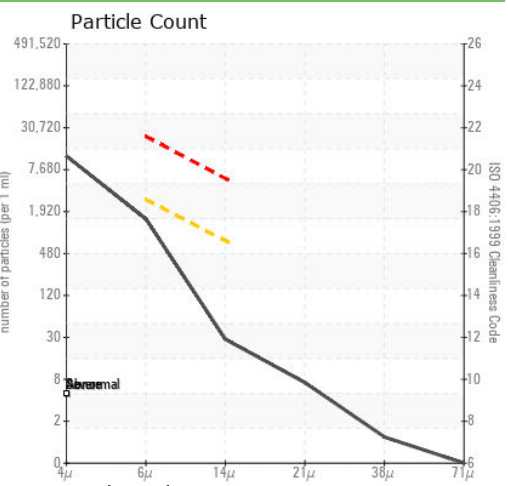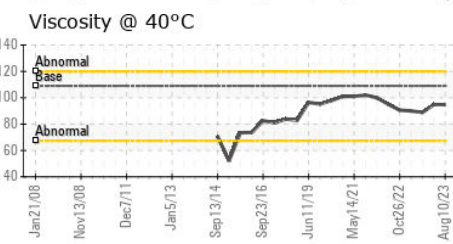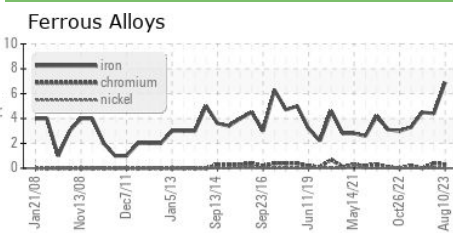

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0819979 **Received** : 18 Aug 2023  
**Lab Number** : 05928110 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10608057 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)