




PROBLEM SUMMARY

Sample Rating Trend

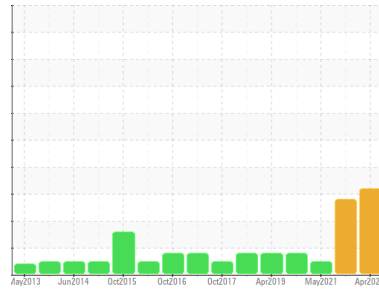


WATER




Area
HIGHLAND [600380484]
 Machine Id
06WEA80813
 Component
Hydraulic System
 Fluid
SHELL TELLUS ARTIC 32 (--- LTR)

COMPONENT CONDITION SUMMARY


▲ Ferrous Alloys

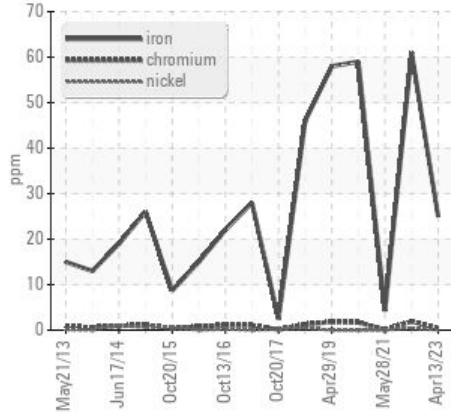

▲ Particle Trend

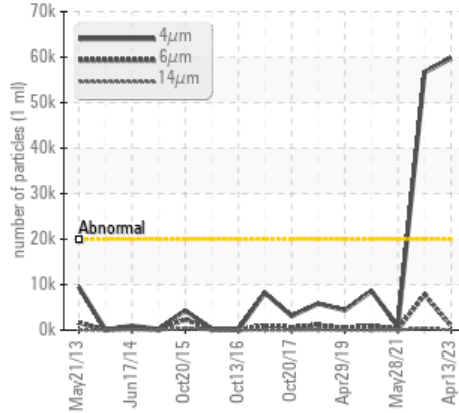

▲ Water

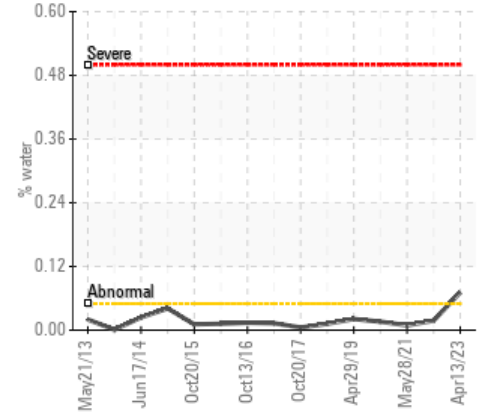

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185m	>20	▲ 25	▲ 61	4
Water	%	ASTM D6304	>0.05	▲ 0.071	0.018	0.009
ppm Water	ppm	ASTM D6304	>500	▲ 710	189.3	97.3
Particles >4µm		ASTM D7647	>20000	▲ 59740	▲ 56662	811
Oil Cleanliness		ISO 4406 (c)	>21/18/15	▲ 23/17/12	▲ 23/20/16	17/15/11

Customer Id: NORHIG
 Sample No.: NX05928141
 Lab Number: 05928141
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

22 Mar 2022 Diag: Don Baldrige

WEAR



We recommend you service the filters on this component. Resample at the next service interval to monitor. The iron level is abnormal. All other component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



28 May 2021 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



03 Jun 2020 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. All other component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

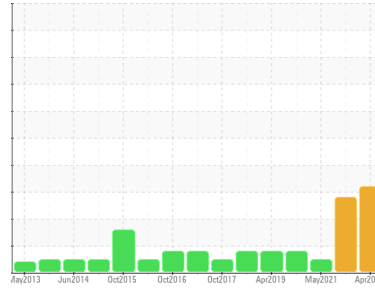

WATER



Area
HIGHLAND [600380484]
 Machine Id
06WEA80813
 Component
Hydraulic System
 Fluid
SHELL TELLUS ARTIC 32 (--- LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX05928141	NX05602781	NX05387317
Sample Date	Client Info		13 Apr 2023	22 Mar 2022	28 May 2021
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		12	16	22
Iron	ppm	ASTM D5185m >20	▲ 25	▲ 61	4
Chromium	ppm	ASTM D5185m >20	<1	2	<1
Nickel	ppm	ASTM D5185m >20	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	<1	<1	0
Aluminum	ppm	ASTM D5185m >20	0	0	0
Lead	ppm	ASTM D5185m >20	2	6	<1
Copper	ppm	ASTM D5185m >20	<1	<1	0
Tin	ppm	ASTM D5185m >20	0	<1	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	1	<1
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	0	0	<1
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 0	0	0	<1
Calcium	ppm	ASTM D5185m 5	3	15	0
Phosphorus	ppm	ASTM D5185m 600	653	589	451
Zinc	ppm	ASTM D5185m 50	48	123	72
Sulfur	ppm	ASTM D5185m 900	783	1205	622

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	1	5	2
Sodium	ppm	ASTM D5185m	0	1	<1
Potassium	ppm	ASTM D5185m >20	<1	0	0
Water	%	ASTM D6304 >0.05	▲ 0.071	0.018	0.009
ppm Water	ppm	ASTM D6304 >500	▲ 710	189.3	97.3

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 59740	▲ 56662	811
Particles >6µm	ASTM D7647	>2500	934	▲ 7790	239
Particles >14µm	ASTM D7647	>320	37	▲ 429	20
Particles >21µm	ASTM D7647	>80	9	▲ 116	1
Particles >38µm	ASTM D7647	>20	0	5	0
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/18/15	▲ 23/17/12	▲ 23/20/16	17/15/11

OIL ANALYSIS REPORT


Particle Trend

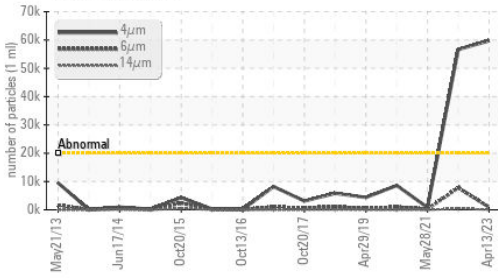


Water

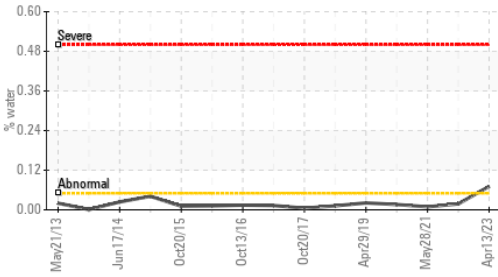


PQ

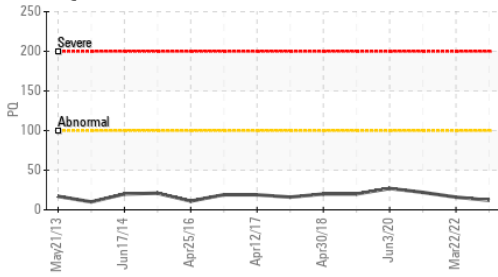

Water

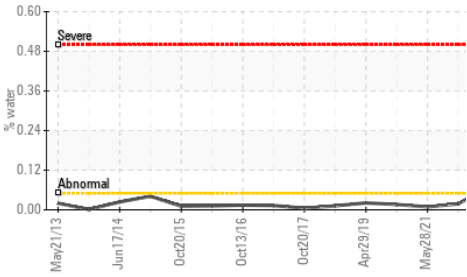

Acid Number

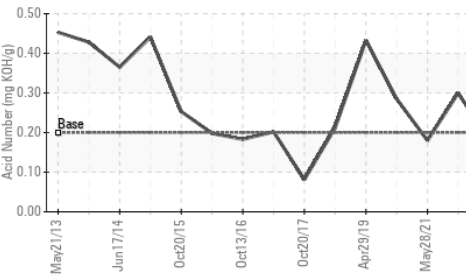

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.20	0.18	0.30	0.180

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	0.2%	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	33.6	29.0	28.4	32.7

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

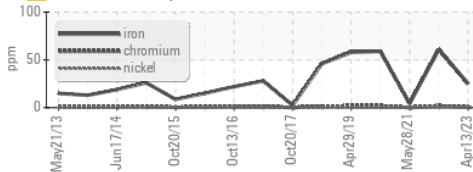


Non-ferrous Metals

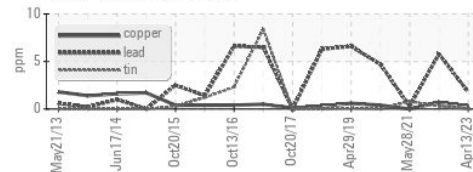


Viscosity @ 40°C

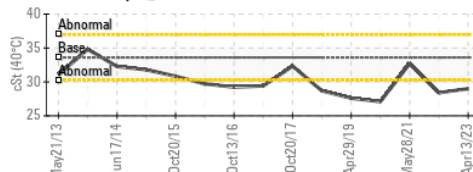

Particle Count

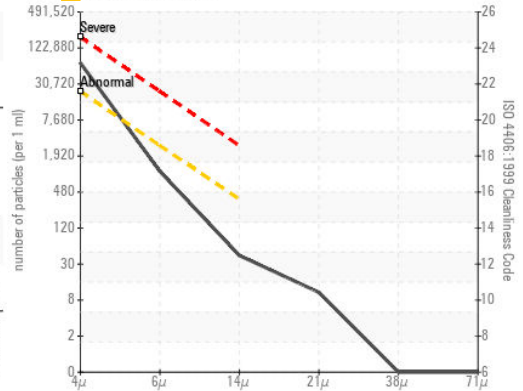

Acid Number

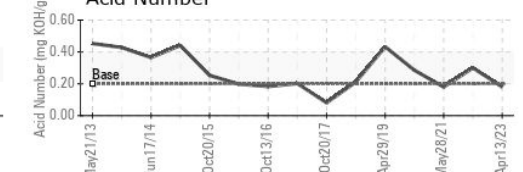

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX05928141 **Received** : 18 Aug 2023
Lab Number : **05928141** **Diagnosed** : 21 Aug 2023
Unique Number : 10608088 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PQ)

NORDEX USA - HIGHLAND & HIGHLAND NORTH
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606
 Contact: Robert Warner
 rwarner@everpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
F: x: