

OIL ANALYSIS REPORT

Area HINO [600388368] 33WEA81859 Component

Hydraulic System Fluid SHELL TELLUS ARTIC 32 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL

| SAMPLE INFORM | | | | | | |
|---|--|--|---|---|--|--|
| | NATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | NX05928153 | NX05387355 | NX05046421 |
| Sample Date | | Client Info | | 01 Aug 2023 | 10 Aug 2021 | 30 Jun 2020 |
| Machine Age | mths | Client Info | | 0 | 0 | 0 |
| Oil Age | mths | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 11 | 21 | 15 |
| Iron | ppm | ASTM D5185m | >20 | 4 | 7 | 5 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >20 | <1 | <1 | 2 |
| Tin | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Antimony | ppm | ASTM D5185m | | | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 5 | 0 | <1 | <1 |
| | 1010 | | | - | | |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Barium Molybdenum | | ASTM D5185m ASTM D5185m | 0 | | | |
| | ppm | | 0 | 0 | 0 | 0 |
| Molybdenum | ppm ppm | ASTM D5185m | 0 | 0 0 | 0 <1 | 0 0 |
| Molybdenum Manganese | ppm ppm ppm | ASTM D5185m ASTM D5185m | 0 0 0 | 0 0 0 | 0 <1 <1 | 0 0 <1 |
| Molybdenum Manganese Magnesium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 | 0 0 0 <1 | 0 <1 <1 <1 | 0 0 <1 0 |
| Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 5 | 0 0 0 <1 8 | 0 <1 <1 <1 0 | 0 0 <1 0 <1 |
| Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 5 600 | 0 0 <1 8 531 | 0 <1 <1 <1 0 520 | 0 0 <1 0 <1 440 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 5 600 50 | 0 0 <1 8 531 64 | 0 <1 <1 <1 0 520 94 | 0 0 <1 0 <1 440 85 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method | 0 0 5 600 50 900 | 0 0 <1 8 531 64 803 | 0 <1 <1 <1 0 520 94 756 | 0 0 <1 0 <1 440 85 700 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method | 0 0 5 600 50 900 limit/base | 0 0 (0 <1 8 531 64 803 current | 0 <1 <1 <1 0 520 94 756 history1 | 0 0 <1 0 <1 440 85 700 history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m | 0 0 5 600 50 900 limit/base | 0 0 (0 <1 8 531 64 803 current 7 | 0 <1 <1 <1 0 520 94 756 history1 2 | 0 0 <1 0 <1 440 85 700 history2 2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m | 0 0 5 600 50 900 limit/base >15 | 0 0 (0 <1 8 531 64 803 Current 7 0 | 0 <1 <1 <1 0 520 94 756 history1 2 <1 | 0 0 <1 0 <1 440 85 700 history2 2 0 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 5 600 50 900 limit/base >15 >20 | 0 0 (0 <1 8 531 64 803 <u>current</u> 7 0 0 | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 0 0 5 600 50 900 limit/base >15 >20 >0.05 | 0 0 2 3 1 8 531 64 803 <i>current</i> 7 0 0 0 0 0 | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 0.013 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 0 0.010 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water ppm Water | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D6304 ASTM D6304 | 0 0 5 600 50 900 limit/base >15 >20 >0.05 >500 | 0 0 -1 -8 531 64 803 <u>current</u> 7 0 0 0 0.014 146.8 | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 0.013 136.5 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 0 0.010 106.7 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water ppm Water | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D6304 ASTM D6304 | 0 0 5 600 50 900 limit/base >15 >20 >0.05 >500 limit/base | 0 0 2 3 1 8 531 64 803 current 7 0 0 0 0 0.014 146.8 current | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 0.013 136.5 history1 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 0 0.010 106.7 history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 | 0 0 5 600 50 900 limit/base >15 >20 >0.05 >500 limit/base >20000 | 0 0 0 <1 8 531 64 803 <u>current</u> 7 0 0 0 0 0.014 146.8 <u>current</u> 1215 | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 0.013 136.5 history1 863 | 0 0 <1 0 <1 440 85 700 <u>history2</u> 2 0 0 0 0.010 106.7 <u>history2</u> 1100 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 | 0 0 5 600 50 900 limit/base >15 >20 >0.05 >500 limit/base >20000 >25000 >2500 | 0 0 () () () () () () () () () () () () () | 0 <1 <1 <1 0 520 94 756 <u>history1</u> 2 <1 0 0.013 136.5 <u>history1</u> 863 158 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 0.010 106.7 history2 1100 148 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 | 0 0 5 600 50 900 limit/base >15 >20 >0.05 >500 limit/base >20000 >25000 >2500 | 0 0 () () () () () () () () () () () () () | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 0.013 136.5 history1 863 158 14 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 0 0.010 106.7 history2 1100 148 9 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | 0 0 0 5 600 50 900 limit/base >15 >20 >0.05 >500 limit/base >20000 >5000 limit/base >20000 | 0 0 () () () () () () () () () () () () () | 0 <1 <1 <1 0 520 94 756 history1 2 <1 0 0.013 136.5 history1 863 158 14 4 | 0 0 <1 0 <1 440 85 700 history2 2 0 0 0 0.010 106.7 history2 1100 148 9 2 |



Water

0.60

0.48 <u>늘</u> 0.36 õ.24

> 0 12 Ab

0.00

250

200

150

10220

2 100 50

Aug22/


PQ


OIL ANALYSIS REPORT

| | | | | FLUID DEGRADATION | | method | limit/base | current | |
|--------------------------|---------|----------|------------|-------------------|----------|------------|------------|---------|--|
| | | | | Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.20 | 0.08 | |
| | | | | VISUAL | | method | limit/base | current | |
| | | | | White Metal | scalar | *Visual | NONE | NONE | |
| | | | | Yellow Metal | scalar | *Visual | NONE | NONE | |
| | | | | Precipitate | scalar | *Visual | NONE | NONE | |
| Deci 4/15 - Nov2/16 - | 2/16 | Jun5/18 | 0/21 | Silt | scalar | *Visual | NONE | NONE | |
| | Jun | Aug10/21 | Debris | scalar | *Visual | NONE | LIGHT | | |
| | | | Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| | | | Appearance | scalar | *Visual | NORML | NORML | | |
| | | | | Odor | scalar | *Visual | NORML | NORML | |
| | | | | Emulsified Water | scalar | *Visual | >0.05 | NEG | |
| | | | | Free Water | scalar | *Visual | | NEG | |
| | | | | FLUID PROPERT | IES | method | limit/base | current | |
| | | | | Visc @ 40°C | cSt | ASTM D445 | 33.6 | 27.5 | |
| Dec14/15 | Nov2/16 | Jun5/18 | Aug10/21 | SAMPLE IMAGES | 3 | method | limit/base | current | |
| Dec | No | ηſ | Auç | | | | | | |

Color

Bottom

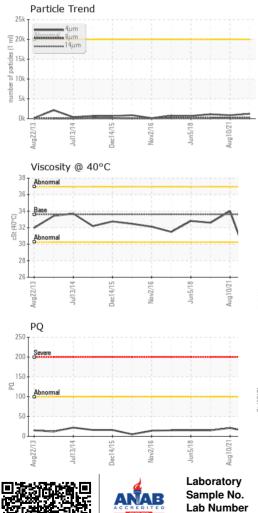



0.204

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

34.0

0.158

NONE

NONE

NONE

NONE

NONE

NONE


NORML

NORML

NEG

NEG

32.6

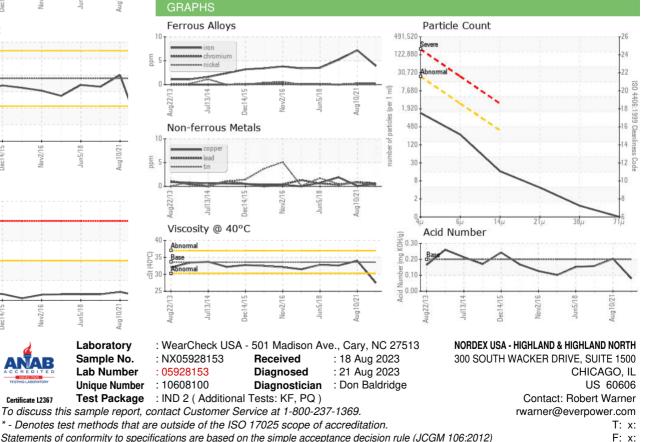

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Robert Warner - NORHIG