

# **OIL ANALYSIS REPORT**

# HINO [600380378] 45WEA81867

Component

**Hydraulic System** 

SHELL TELLUS ARTIC 32 (--- LTR)

Sample Rating Trend



### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                 |        | Aug2013 Ju   | 1112U14 DBCZU15 NOV |             | May2022     |             |
|-----------------|--------|--------------|---------------------|-------------|-------------|-------------|
| SAMPLE INFORM   | MATION | method       | limit/base          | current     | history1    | history2    |
| Sample Number   |        | Client Info  |                     | NX05928171  | NX05602811  | NX05387340  |
| Sample Date     |        | Client Info  |                     | 13 Jun 2023 | 18 May 2022 | 29 Jul 2021 |
| Machine Age     | mths   | Client Info  |                     | 0           | 0           | 0           |
| Oil Age         | mths   | Client Info  |                     | 0           | 0           | 0           |
| Oil Changed     |        | Client Info  |                     | N/A         | N/A         | N/A         |
| Sample Status   |        |              |                     | NORMAL      | NORMAL      | NORMAL      |
| WEAR METALS     |        | method       | limit/base          | current     | history1    | history2    |
| PQ              |        | ASTM D8184   |                     | 16          | 20          | 17          |
| Iron            | ppm    | ASTM D5185m  | >20                 | 13          | 11          | 7           |
| Chromium        | ppm    | ASTM D5185m  | >20                 | <1          | <1          | <1          |
| Nickel          | ppm    | ASTM D5185m  | >20                 | 0           | <1          | 0           |
| Titanium        | ppm    | ASTM D5185m  |                     | 0           | 0           | 0           |
| Silver          | ppm    | ASTM D5185m  |                     | 0           | <1          | 0           |
| Aluminum        | ppm    | ASTM D5185m  | >20                 | <1          | 0           | 0           |
| Lead            | ppm    | ASTM D5185m  | >20                 | 2           | 1           | 2           |
| Copper          | ppm    | ASTM D5185m  | >20                 | <1          | <1          | 0           |
| Tin             | ppm    | ASTM D5185m  | >20                 | 2           | 2           | <1          |
| Antimony        | ppm    | ASTM D5185m  |                     |             |             | 0           |
| Vanadium        | ppm    | ASTM D5185m  |                     | 0           | 0           | 0           |
| Cadmium         | ppm    | ASTM D5185m  |                     | 0           | 0           | 0           |
| ADDITIVES       |        | method       | limit/base          | current     | history1    | history2    |
| Boron           | ppm    | ASTM D5185m  | 5                   | 0           | 0           | <1          |
| Barium          | ppm    | ASTM D5185m  | 0                   | 0           | 0           | 0           |
| Molybdenum      | ppm    | ASTM D5185m  | 0                   | 0           | 0           | <1          |
| Manganese       | ppm    | ASTM D5185m  | 0                   | 0           | 0           | <1          |
| Magnesium       | ppm    | ASTM D5185m  | 0                   | <1          | 0           | <1          |
| Calcium         | ppm    | ASTM D5185m  | 5                   | 0           | 0           | <1          |
| Phosphorus      | ppm    | ASTM D5185m  | 600                 | 580         | 544         | 494         |
| Zinc            | ppm    | ASTM D5185m  | 50                  | 78          | 70          | 76          |
| Sulfur          | ppm    | ASTM D5185m  | 900                 | 834         | 904         | 786         |
| CONTAMINANTS    |        | method       | limit/base          | current     | history1    | history2    |
| Silicon         | ppm    | ASTM D5185m  | >15                 | 5           | 4           | 3           |
| Sodium          | ppm    | ASTM D5185m  |                     | 0           | 0           | <1          |
| Potassium       | ppm    | ASTM D5185m  | >20                 | 0           | 0           | <1          |
| Water           | %      | ASTM D6304   | >0.05               | 0.008       | 0.018       | 0.013       |
| ppm Water       | ppm    | ASTM D6304   | >500                | 80.7        | 187.3       | 131.7       |
| FLUID CLEANLIN  | IESS   | method       | limit/base          | current     | history1    | history2    |
| Particles >4µm  |        | ASTM D7647   | >20000              | 3869        | 4695        | 835         |
| Particles >6µm  |        | ASTM D7647   | >2500               | 371         | 144         | 149         |
| Particles >14µm |        | ASTM D7647   | >320                | 14          | 11          | 13          |
| Particles >21µm |        | ASTM D7647   | >80                 | 3           | 2           | 4           |
| Particles >38µm |        | ASTM D7647   | >20                 | 0           | 0           | 0           |
| Particles >71μm |        | ASTM D7647   | >4                  | 0           | 0           | 0           |
| Oil Cleanliness |        | ISO 4406 (c) | >21/18/15           | 19/16/11    | 19/14/11    | 17/14/11    |



## OIL ANALYSIS REPORT

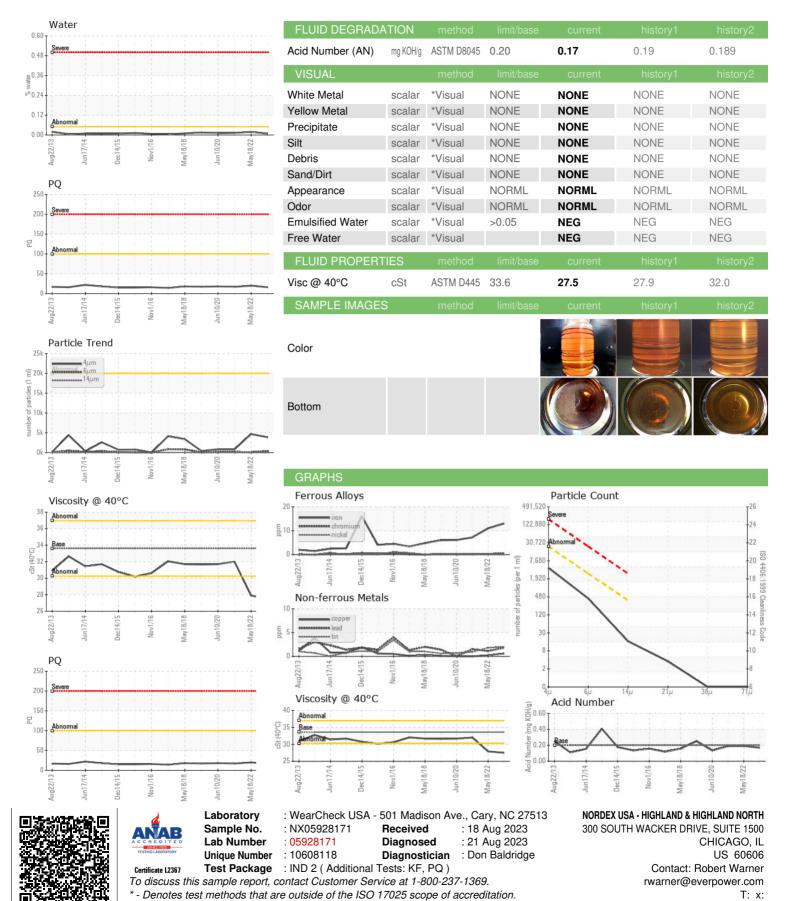

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x: F: x: