


OIL ANALYSIS REPORT

HINO [600380381] 48WEA81852

Component

Hydraulic System

SHELL TELLUS ARTIC 32 (--- LTR)



Sample Rating Trend



Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|-----------------|--------|--------------|------------|-------------|-------------|-------------|
| Sample Number | | Client Info | | NX05928176 | NX05602809 | NX05387318 |
| Sample Date | | Client Info | | 01 Jun 2023 | 17 Jul 2022 | 20 Jul 2021 |
| Machine Age | mths | Client Info | | 0 | 0 | 0 |
| Oil Age | mths | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 14 | 20 | 23 |
| Iron | ppm | ASTM D5185m | >20 | 3 | 2 | 7 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >20 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 2 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >20 | <1 | <1 | 2 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 5 | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 0 | <1 | 0 | <1 |
| Calcium | ppm | ASTM D5185m | 5 | 8 | 6 | 0 |
| Phosphorus | ppm | ASTM D5185m | 600 | 563 | 578 | 536 |
| Zinc | ppm | ASTM D5185m | 50 | 98 | 96 | 82 |
| Sulfur | ppm | ASTM D5185m | 900 | 851 | 965 | 669 |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 5 | 4 | 2 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Water | % | ASTM D6304 | >0.05 | 0.014 | 0.016 | 0.012 |
| ppm Water | ppm | ASTM D6304 | >500 | 140.5 | 168.5 | 126.2 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | 829 | 1498 | 1473 |
| Particles >6µm | | ASTM D7647 | >2500 | 198 | 193 | 269 |
| Particles >14μm | | ASTM D7647 | >320 | 16 | 18 | 18 |
| Particles >21µm | | ASTM D7647 | >80 | 3 | 5 | 3 |
| Particles >38μm | | ASTM D7647 | >20 | 0 | 1 | 0 |
| Particles >71µm | | ASTM D7647 | >4 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >21/18/15 | 17/15/11 | 18/15/11 | 18/15/11 |



OIL ANALYSIS REPORT

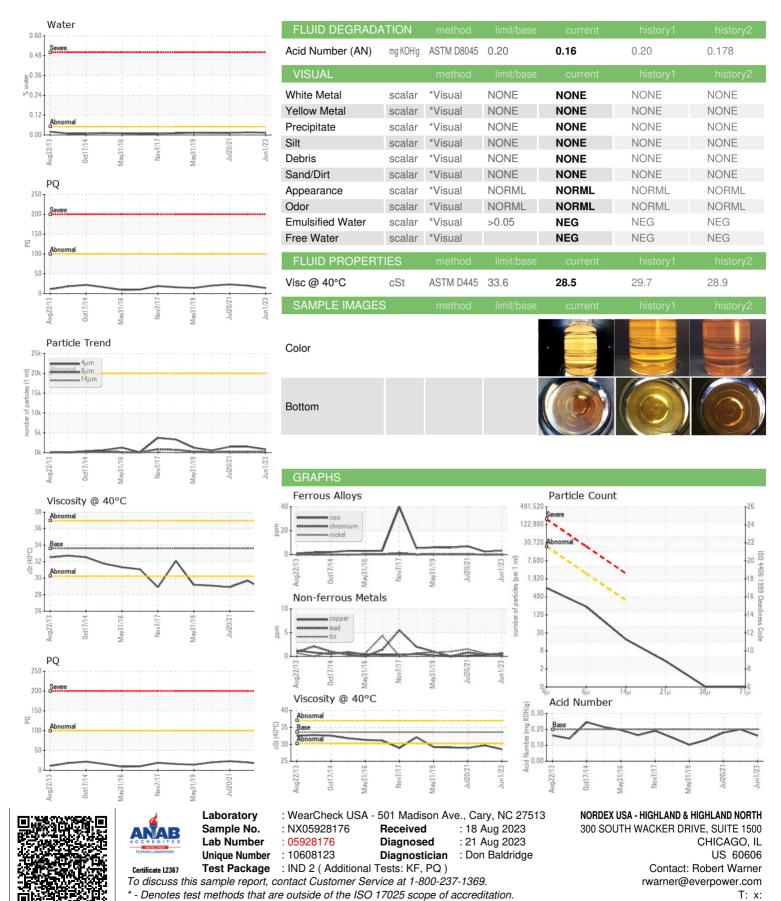

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x: F: x: