




# PROBLEM SUMMARY

Sample Rating Trend

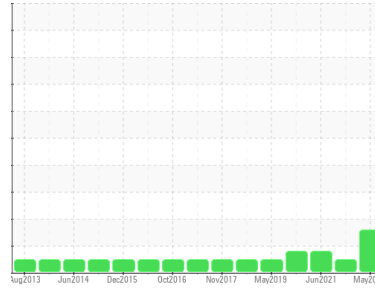


**WATER**



Area  
**HIGHLAND [600380489]**  
 Machine Id  
**11WEA80818**  
 Component  
**Hydraulic System**  
 Fluid  
**SHELL TELLUS ARTIC 32 (--- LTR)**

## COMPONENT CONDITION SUMMARY

▲ Water

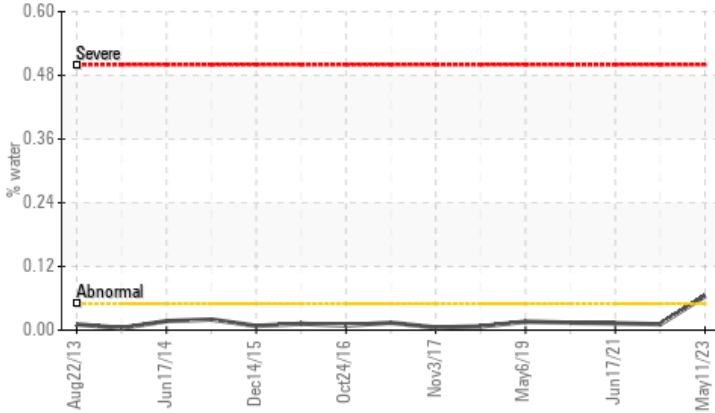

## RECOMMENDATION

Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	NORMAL	ABNORMAL
Water	%	ASTM D6304	>0.05	▲ <b>0.064</b>	0.011	0.013
ppm Water	ppm	ASTM D6304	>500	▲ <b>640</b>	119.2	137.5

Customer Id: NORHIG  
 Sample No.: NX05928188  
 Lab Number: 05928188  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 24 May 2022 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 17 Jun 2021 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. All other component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 09 Jun 2020 Diag: Don Baldrige

WEAR



No corrective action is recommended at this time. Resample at the next service interval to monitor. The iron level is abnormal. All other component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






# OIL ANALYSIS REPORT

## Sample Rating Trend

**WATER**



Area  
**HIGHLAND [600380489]**  
 Machine Id  
**11WEA80818**  
 Component  
**Hydraulic System**  
 Fluid  
**SHELL TELLUS ARTIC 32 (--- LTR)**

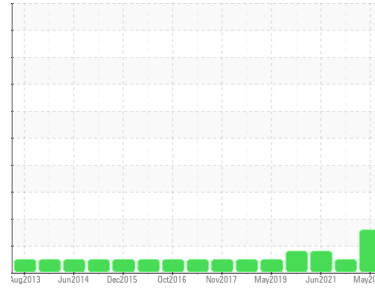

### DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>NX05928188</b>	NX05602792	NX05387327
Sample Date	Client Info	<b>11 May 2023</b>	24 May 2022	17 Jun 2021
Machine Age	mths Client Info	<b>0</b>	0	0
Oil Age	mths Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>MARGINAL</b>	NORMAL	ABNORMAL

### WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	<b>12</b>	16	17
Iron	ppm ASTM D5185m >20	<b>9</b>	8	<b>▲ 23</b>
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >20	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>0</b>	0	<1
Lead	ppm ASTM D5185m >20	<b>2</b>	2	6
Copper	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 5	<b>0</b>	<1	2
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Calcium	ppm ASTM D5185m 5	<b>2</b>	1	5
Phosphorus	ppm ASTM D5185m 600	<b>608</b>	585	582
Zinc	ppm ASTM D5185m 50	<b>83</b>	60	145
Sulfur	ppm ASTM D5185m 900	<b>708</b>	727	936

### CONTAMINANTS






method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>1</b>	<1	2
Sodium	ppm ASTM D5185m	<b>0</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Water	% ASTM D6304 >0.05	<b>▲ 0.064</b>	0.011	0.013
ppm Water	ppm ASTM D6304 >500	<b>▲ 640</b>	119.2	137.5

### FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	<b>3843</b>	1095	1077
Particles >6µm	ASTM D7647 >2500	<b>1068</b>	156	206
Particles >14µm	ASTM D7647 >320	<b>118</b>	10	14
Particles >21µm	ASTM D7647 >80	<b>39</b>	4	3
Particles >38µm	ASTM D7647 >20	<b>4</b>	0	0
Particles >71µm	ASTM D7647 >4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >21/18/15	<b>19/17/14</b>	17/14/10	17/15/11



# OIL ANALYSIS REPORT

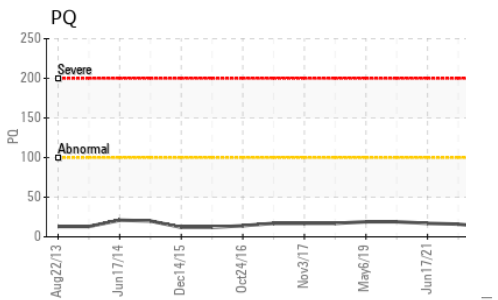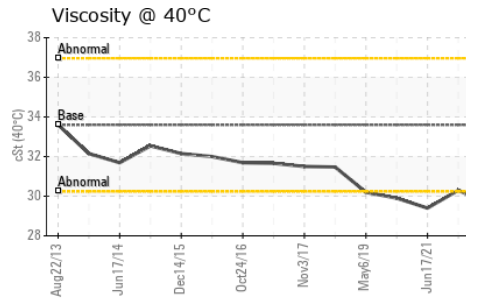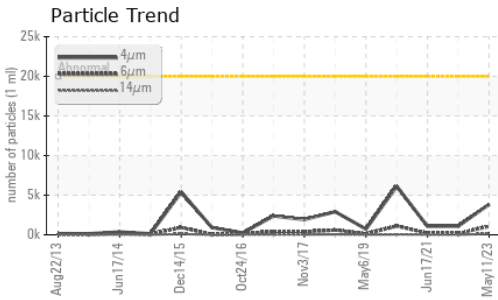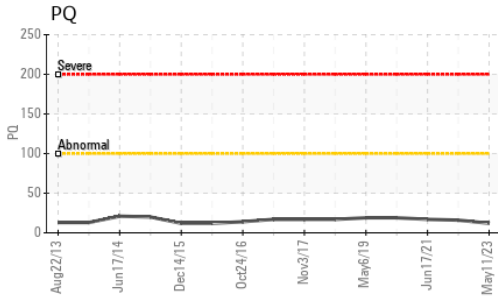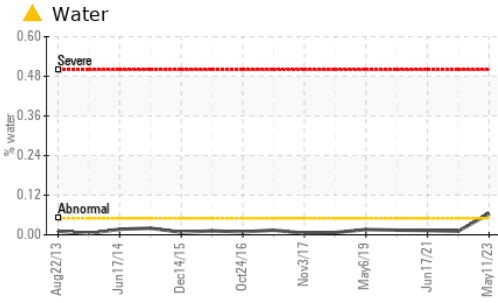

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.20	<b>0.14</b>	0.14	0.225


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>0.2%</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	33.6	<b>29.6</b>	30.3	29.4






SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color

Bottom

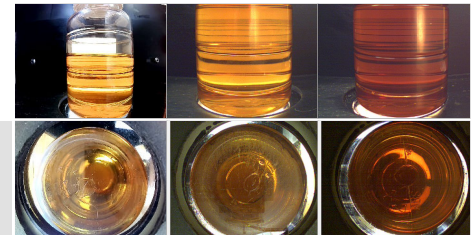

## GRAPHS

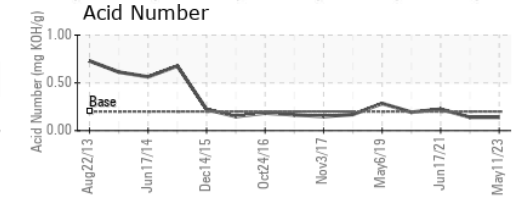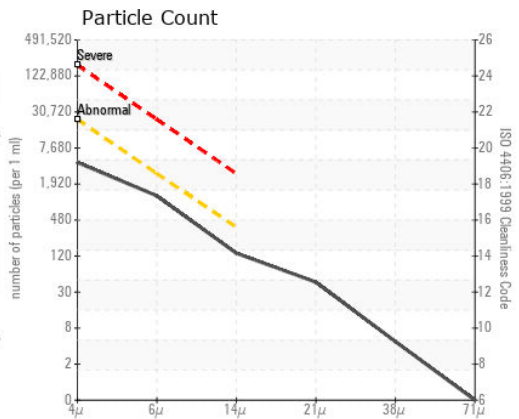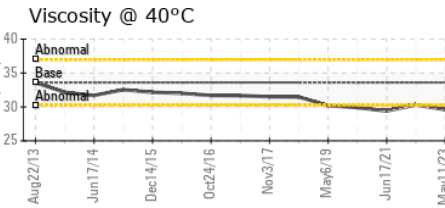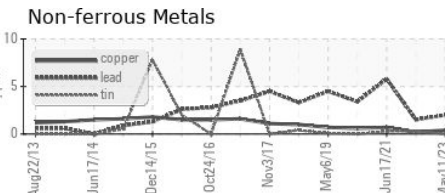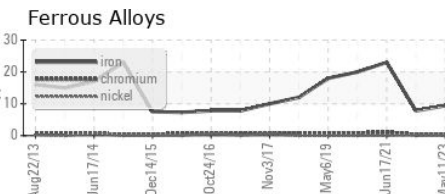

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : NX05928188  
**Lab Number** : **05928188**  
**Unique Number** : 10608135  
**Test Package** : IND 2 ( Additional Tests: KF, PQ )

**NORDEX USA - HIGHLAND & HIGHLAND NORTH**  
 300 SOUTH WACKER DRIVE, SUITE 1500  
 CHICAGO, IL  
 US 60606  
 Contact: Robert Warner  
 rwarner@everpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
F: x: