




OIL ANALYSIS REPORT

Sample Rating Trend

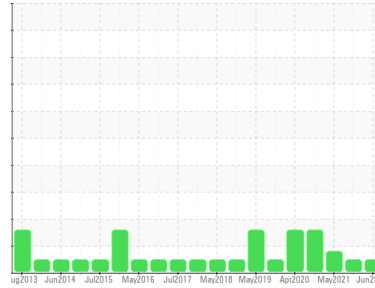

NORMAL



Area
HINO [600380384]

Machine Id
51WEA81861

Component
Wind Turbine Gearbox

Fluid
CASTROL OPTIGEAR SYNTHETIC X 320 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX05928193	NX05602721	NX05387388
Sample Date	Client Info		14 Jun 2023	03 Jun 2022	04 May 2021
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>80	20	16	21	
Iron	ppm	ASTM D5185m	>150	3	<1	2
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>20	0	<1	<1
Copper	ppm	ASTM D5185m	>50	6	4	6
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m	>5	---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	1150	696	533	667
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		4	3	6
Calcium	ppm	ASTM D5185m	2000	1274	1051	1212
Phosphorus	ppm	ASTM D5185m	400	297	233	296
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	1850	1839	1463	1513

CONTAMINANTS






	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	7	6	10
Sodium	ppm	ASTM D5185m	>20	5	3	6
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water	%	ASTM D6304	>0.05	0.037	0.042	0.035
ppm Water	ppm	ASTM D6304	>500	377.3	420.0	359.9

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		6660	3750	---
Particles >6µm	ASTM D7647	>2500	809	857	---
Particles >14µm	ASTM D7647	>320	59	62	---
Particles >21µm	ASTM D7647	>80	13	15	---
Particles >38µm	ASTM D7647	>20	2	4	---
Particles >71µm	ASTM D7647	>4	2	3	---
Oil Cleanliness	ISO 4406 (c)	>--/18/15	20/17/13	19/17/13	---



OIL ANALYSIS REPORT

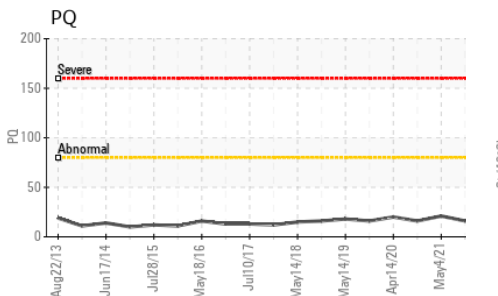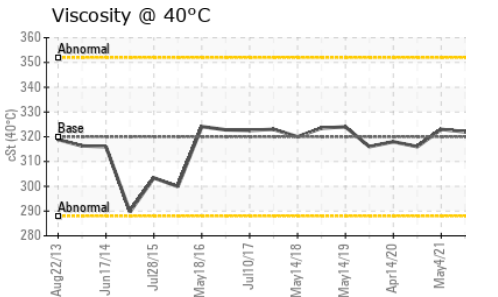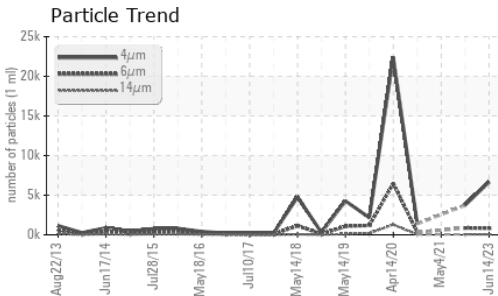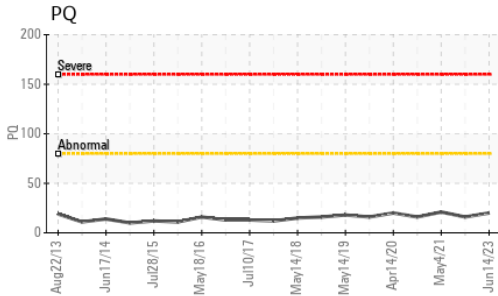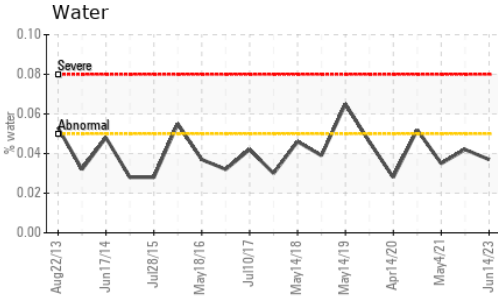

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.73	0.56	0.668

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Debris	scalar	*Visual	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	323	322	323

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------




GRAPHS


Ferrous Alloys

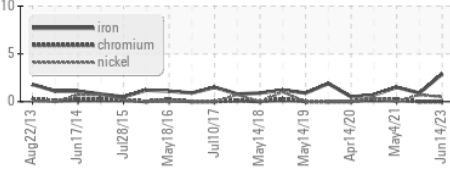


Non-ferrous Metals

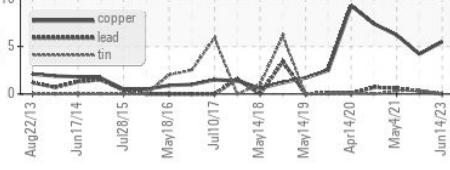


Viscosity @ 40°C

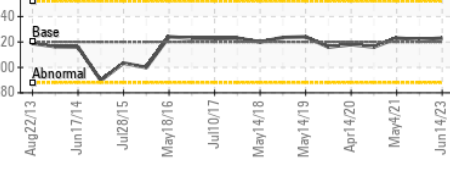

Particle Count

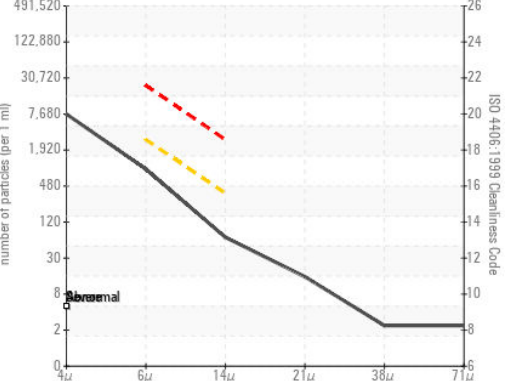

Acid Number

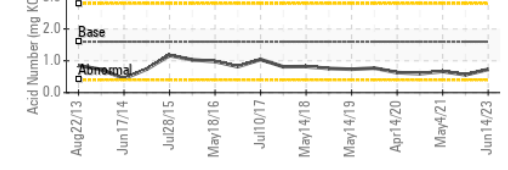

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX05928193 **Received** : 18 Aug 2023
Lab Number : 05928193 **Diagnosed** : 21 Aug 2023
Unique Number : 10608140 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

NORDEX USA - HIGHLAND & HIGHLAND NORTH
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: Robert Warner
 rwarner@everpower.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: x:
 F: x:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)