

# **OIL ANALYSIS REPORT**

#### Area HINO [600380386] Machine Id 53WEA81856 Component

Wind Turbine Gearbox

CASTROL OPTIGEAR SYNTHETIC X 320 (--- LTR)

## DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend




NORMAL

SAMPLE INFORMATION method NX05602727 NX05928202 NX05700279 Sample Number **Client Info** 12 May 2023 03 May 2022 Sample Date Client Info 14 Nov 2022 0 0 0 Machine Age mths **Client Info** Oil Age mths Client Info 0 0 0 Oil Changed Client Info N/A N/A N/A NORMAL ABNORMAL Sample Status NORMAL WEAR METALS PQ ASTM D8184 >80 15 8 18 ASTM D5185m >150 3 1 2 Iron ppm Chromium ppm ASTM D5185m >5 0 0 0 Nickel ASTM D5185m >10 <1 0 <1 ppm 0 0 Titanium ppm ASTM D5185m >10 0 Silver ppm ASTM D5185m 0 0 <1 Aluminum ASTM D5185m >10 <1 0 ppm <1 0 Lead ASTM D5185m >20 <1 ppm <1 Copper ppm ASTM D5185m >50 11 11 6 ASTM D5185m >10 0 <1 Tin ppm <1 Antimony ppm ASTM D5185m >5 ----Vanadium ASTM D5185m 0 0 0 ppm Cadmium ASTM D5185m 0 0 0 ppm ASTM D5185m 0 37 Boron <1 ppm 0 0 0 Barium ppm ASTM D5185m 1150 654 593 Molybdenum ASTM D5185m 644 ppm 0 0 0 Manganese ppm ASTM D5185m Magnesium ppm ASTM D5185m 4 6 4 Calcium ASTM D5185m 2000 1219 1282 1171 ppm 302 256 Phosphorus 400 286 ppm ASTM D5185m Zinc ASTM D5185m 0 0 0 0 ppm Sulfur 1850 1822 1883 ppm ASTM D5185m 1600 CONTAMINANTS ppm >50 8 8 7 Silicon ASTM D5185m >20 3 3 3 Sodium ppm ASTM D5185m Potassium ASTM D5185m >20 1 0 0 ppm Water % ASTM D6304 >0.05 0.031 0.021 0.032 ppm Water ASTM D6304 >500 319.1 212.3 327.7 ppm FLUID CLEANLINESS


Particles >4µm	ASTM D7647	13305	4031	
Particles >6µm	ASTM D7647 >2500	792	941	
Particles >14µm	ASTM D7647 >320	27	83	
Particles >21µm	ASTM D7647 >80	12	20	
Particles >38µm	ASTM D7647 >20	5	1	
Particles >71µm	ASTM D7647 >4	5	0	
Oil Cleanliness	ISO 4406 (c) >/18/	15 <b>21/17/12</b>	19/17/14	




# **OIL ANALYSIS REPORT**

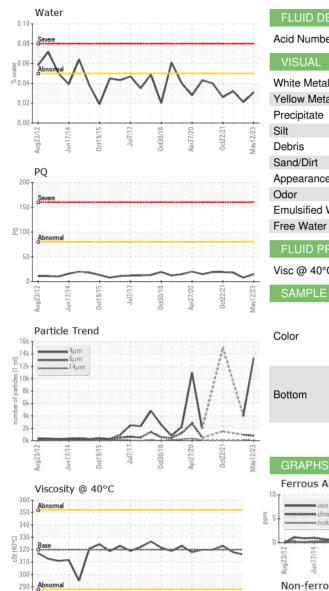

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.60	0.53	0.80
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	314	316	318
SAMPLE IMAGES	5	method	limit/base	current	history1	history2



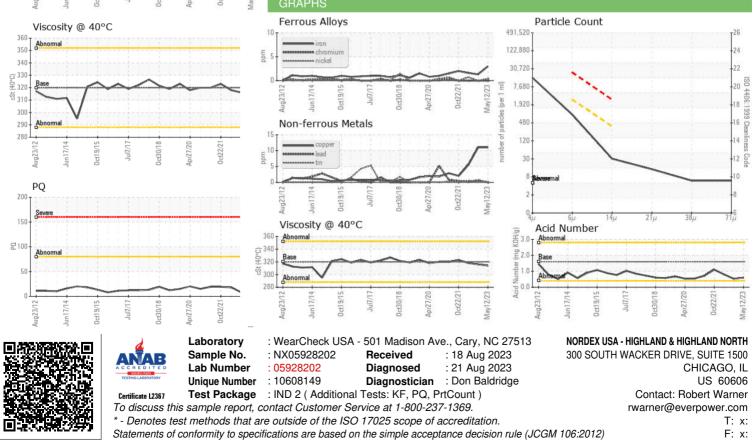

Contact/Location: Robert Warner - NORHIG