

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

HIGHLAND [600380496] 18WEA80825 Component

Wind Turbine Gearbox MOBIL XMP 320 (--- LTR)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05928225	NX05787933	NX05700250
Sample Date		Client Info		16 Jun 2023	21 Feb 2023	26 Oct 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed	maio	Client Info		N/A	N/A	0 N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	13	20	10
Iron	ppm	ASTM D5185m	>150	108	87	66
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m	>10	0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>50	2	2	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		19	<1	<1
Manganese	ppm	ASTM D5185m		1	2	1
Magnesium	ppm	ASTM D5185m		<1	3	0
Calcium	ppm	ASTM D5185m		8	0	0
Phosphorus	ppm	ASTM D5185m	315	356	343	331
Zinc	ppm	ASTM D5185m		18	21	14
Sulfur	ppm	ASTM D5185m		14669	13716	13483
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	1	<1
Sodium	ppm	ASTM D5185m		0	2	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304		0.009	0.008	0.017
ppm Water	ppm	ASTM D6304	>500	96.6	85.4	173.0
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7896	84536	2179
Particles >6µm		ASTM D7647 ASTM D7647	>2500	993	▲ 22920	312
Particles >14µm		ASTM D7647 ASTM D7647	>320	993 44	211	17
1						4
Particles >21µm		ASTM D7647		9	26	
Particles >38µm		ASTM D7647	>20	0	1	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	20/17/13	<u> </u>	18/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.22	1.15	1.17

Report Id: NORHIG [WUSCAR] 05928225 (Generated: 08/22/2023 10:52:58) Rev: 1


Contact/Location: Robert Warner - NORHIG



OIL ANALYSIS REPORT

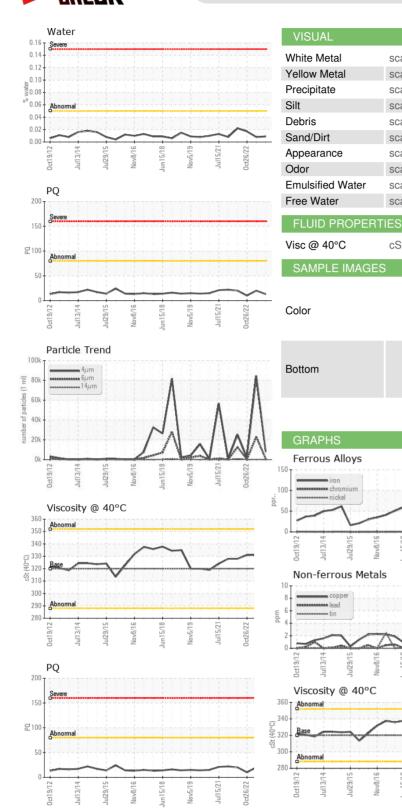



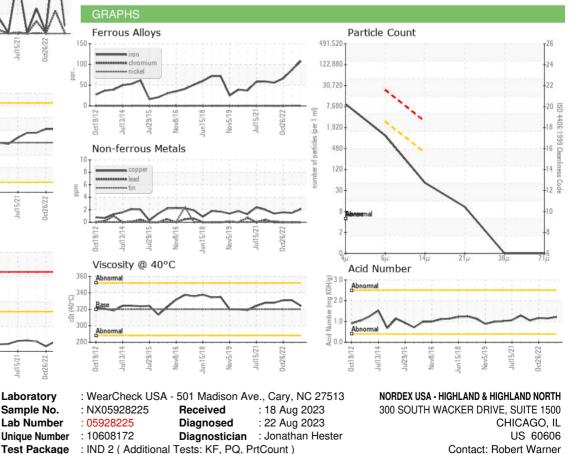

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T: x:

F: x:

rwarner@everpower.com