

OIL ANALYSIS REPORT

Area HINO [600380363] 30WEA81873 Component

Wind Turbine Gearbox

Fluid CASTROL OPTIGEAR SYNTHETIC X 320 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05928232	NX05700270	NX05602728
Sample Date		Client Info		07 Jul 2023	01 Nov 2022	16 Jun 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	12	7	15
Iron	ppm	ASTM D5185m	>150	3	2	2
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>10	<1	0	1
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>50	2	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	41	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	1150	772	725	595
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		5	6	4
Calcium	ppm	ASTM D5185m	2000	1426	1452	1214
Phosphorus	ppm	ASTM D5185m	400	321	332	270
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	1850	1937	2047	1640
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	9	9	7
Sodium	ppm	ASTM D5185m	>20	4	4	4
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.05	0.025	0.023	0.030
ppm Water	ppm	ASTM D6304	>500	259.6	231.4	307.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2577	688	5398
Particles >6µm		ASTM D7647	>2500	299	109	1421
Particles >14µm		ASTM D7647	>320	22	9	122
Particles >21µm		ASTM D7647	>80	7	2	26
Particles >38µm		ASTM D7647	>20	0	0	3
Particles >71µm		ASTM D7647	>4	0	0	2




OIL ANALYSIS REPORT

Color

Bottom

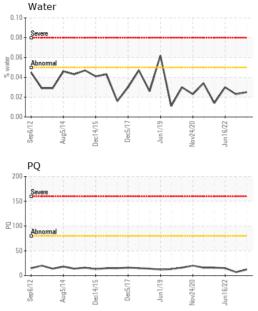


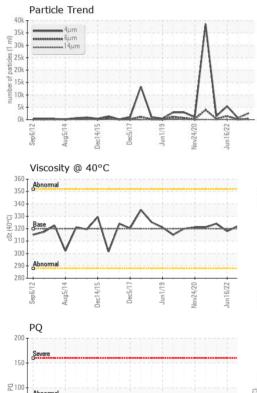


			4		Laboratory Sample No.		
Sep6/12	Aug5/14	Dec14/15	Dec5/17	Jun1/19	Nov24/20	Jun16/22	
	~~						
50-							
00-Abnor	rmal						
50-							
Severe							

Certificate L2367

FLUID DEGRAD	ATION	method				history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.75	0.66	0.70
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	ΓIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	324	322	318
SAMPLE IMAGES r		method	limit/base	current	history1	history2

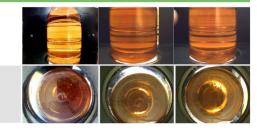

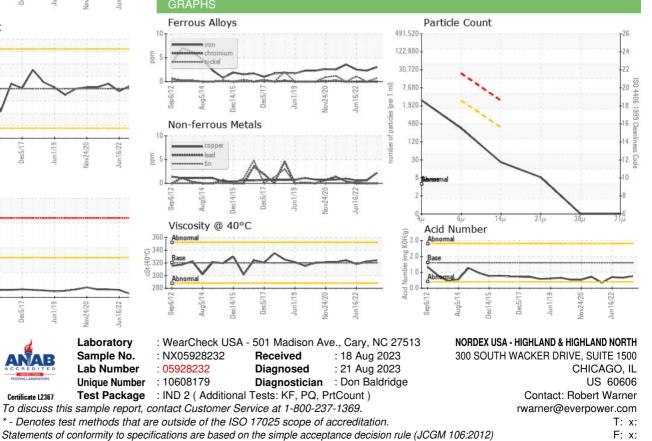

Report Id: NORHIG [WUSCAR] 05928232 (Generated: 08/21/2023 13:52:38) Rev: 1

Contact/Location: Robert Warner - NORHIG