

## **OIL ANALYSIS REPORT**

### Area HINO [600380364] 31WEA81848 Component

Wind Turbine Gearbox

CASTROL OPTIGEAR SYNTHETIC X 320 (--- LTR)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Elui


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05928234	NX05700256	NX05602754
Sample Date		Client Info		05 Jul 2023	31 Oct 2022	16 Jun 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	MARGINAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	12	5	11
Iron	ppm	ASTM D5185m	>150	4	4	3
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	1
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>50	3	3	3
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	40	1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	1150	814	717	604
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		5	6	4
Calcium	ppm	ASTM D5185m		1455	1397	1192
Phosphorus	ppm	ASTM D5185m	400	321	327	264
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	1850	1972	2050	1624
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	9	8	7
Sodium	ppm	ASTM D5185m	>20	3	6	4
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.05	0.027	0.014	▲ 0.071
ppm Water	ppm	ASTM D6304	>500	279.0	149.6	▲ 713.9
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1549	1088	822

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1549	1088	822
Particles >6µm	ASTM D7647	>2500	195	194	201
Particles >14µm	ASTM D7647	>320	6	20	20
Particles >21µm	ASTM D7647	>80	1	4	5
Particles >38µm	ASTM D7647	>20	0	1	1
Particles >71µm	ASTM D7647	>4	0	0	1
Oil Cleanliness	ISO 4406 (c)	>/18/15	18/15/10	17/15/11	17/15/11




0k


# **OIL ANALYSIS REPORT**

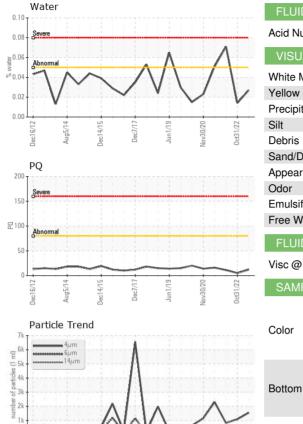

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.84	0.49	0.55
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	324	317	322
SAMPLE IMAGES	5	method	limit/base	current	history1	history2





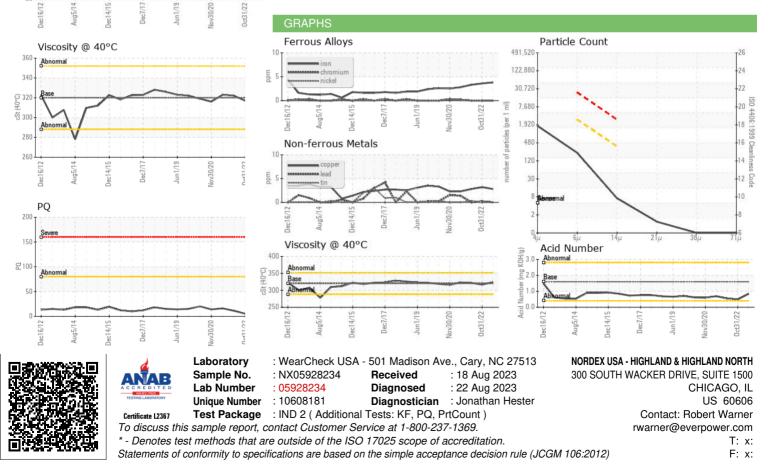

Contact/Location: Robert Warner - NORHIG