




# PROBLEM SUMMARY

## Sample Rating Trend

ISO




Area  
**HIGHLAND [600380484]**  
 Machine Id  
**06WEA80813**  
 Component  
**Wind Turbine Gearbox**  
 Fluid  
**MOBIL XMP 320 (--- LTR)**

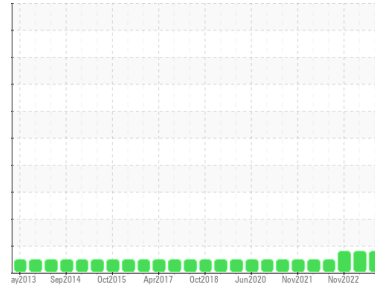

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

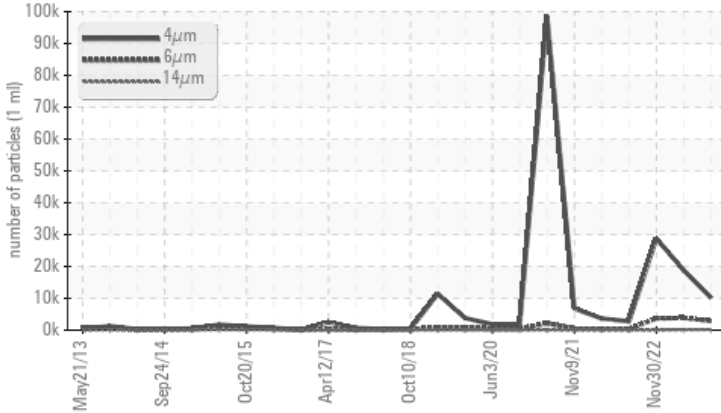

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status		ATTENTION	ATTENTION	ATTENTION
Particles >6µm	ASTM D7647 >2500	▲ 2865	▲ 3840	▲ 3671
Oil Cleanliness	ISO 4406 (c) >--/18/15	▲ 21/19/14	▲ 21/19/14	▲ 22/19/11

Customer Id: NORHIG  
 Sample No.: NX05928236  
 Lab Number: 05928236  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 30 Jan 2023 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 30 Nov 2022 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 03 Oct 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






# OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area  
**HIGHLAND [600380484]**  
 Machine Id  
**06WEA80813**  
 Component  
**Wind Turbine Gearbox**  
 Fluid  
**MOBIL XMP 320 (--- LTR)**

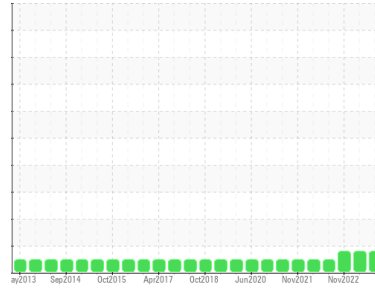

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>NX05928236</b>	NX05766528	NX05710366
Sample Date	Client Info		<b>13 Apr 2023</b>	30 Jan 2023	30 Nov 2022
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ATTENTION	ATTENTION

## WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>80	<b>8</b>	9	5	
Iron	ppm	ASTM D5185m	>150	<b>46</b>	80	86
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>13</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	1
Magnesium	ppm	ASTM D5185m		<b>0</b>	<1	1
Calcium	ppm	ASTM D5185m		<b>9</b>	0	3
Phosphorus	ppm	ASTM D5185m	315	<b>386</b>	351	395
Zinc	ppm	ASTM D5185m		<b>6</b>	29	36
Sulfur	ppm	ASTM D5185m		<b>14789</b>	13368	12635

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	<1	4
Sodium	ppm	ASTM D5185m	>20	<b>0</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Water	%	ASTM D6304	>0.05	<b>0.012</b>	0.007	0.026
ppm Water	ppm	ASTM D6304	>500	<b>126.7</b>	79.4	264.9

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>10171</b>	18791	28774
Particles >6µm	ASTM D7647	>2500	<b>2865</b>	3840	3671
Particles >14µm	ASTM D7647	>320	<b>132</b>	138	20
Particles >21µm	ASTM D7647	>80	<b>24</b>	24	2
Particles >38µm	ASTM D7647	>20	<b>1</b>	2	1
Particles >71µm	ASTM D7647	>4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/15	<b>21/19/14</b>	21/19/14	22/19/11

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.03</b>	1.10	1.19




# OIL ANALYSIS REPORT

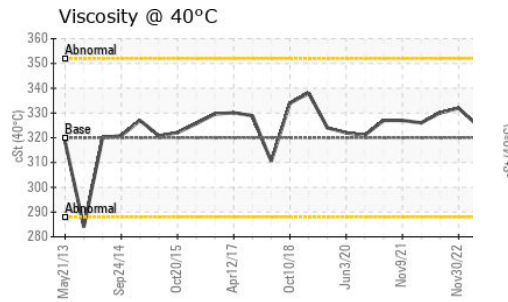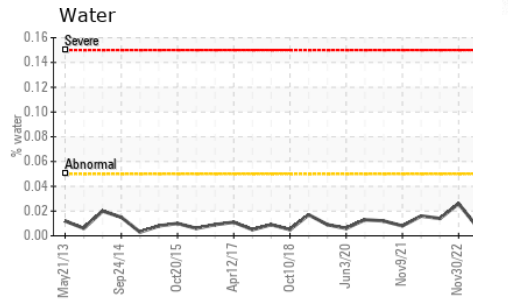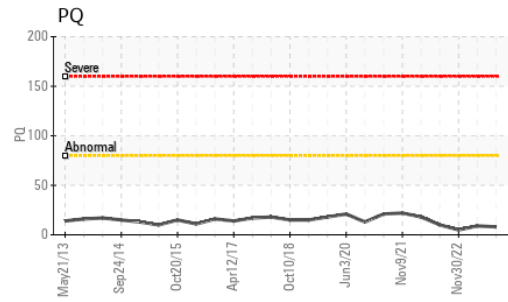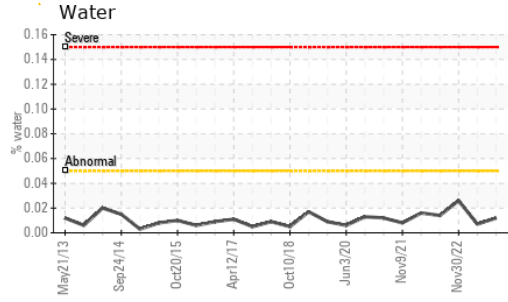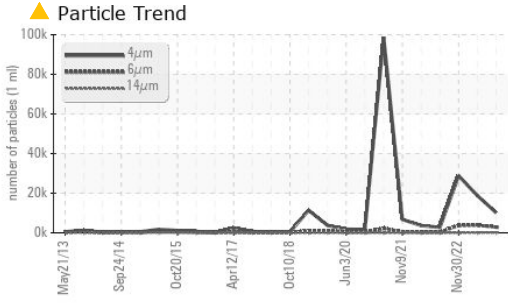





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	317	325

### SAMPLE IMAGES

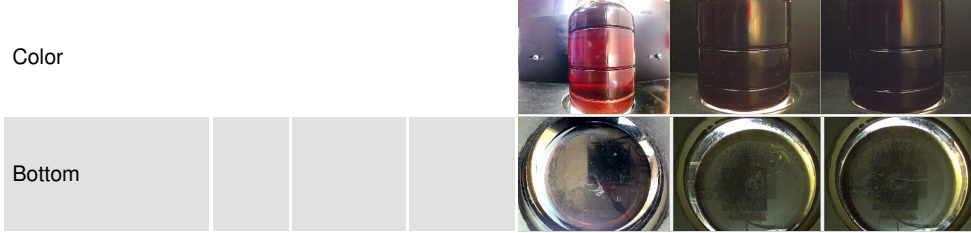

### GRAPHS

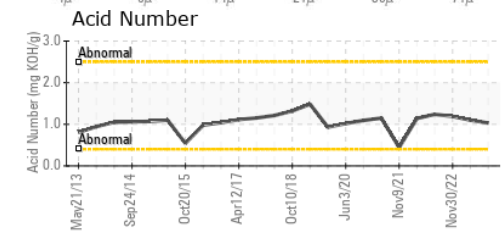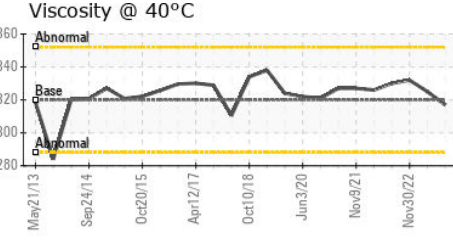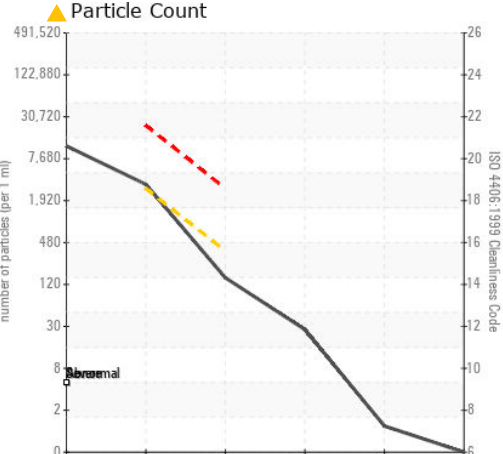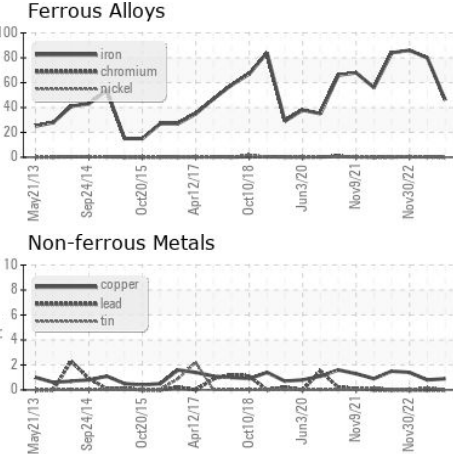

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : NX05928236 **Received** : 18 Aug 2023  
**Lab Number** : 05928236 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10608183 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KF, PQ, PrtCount )

**NORDEX USA - HIGHLAND & HIGHLAND NORTH**  
 300 SOUTH WACKER DRIVE, SUITE 1500  
 CHICAGO, IL  
 US 60606  
 Contact: Robert Warner  
 rwarner@everpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: x: