# OIL ANALYSIS REPORT

Sample Rating Trend

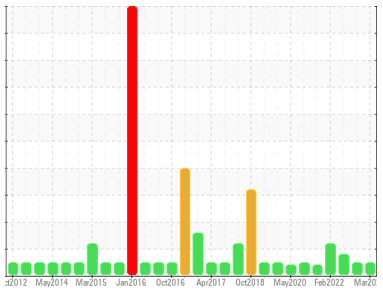

NORMAL

Area
**HIGHLAND [600380482]**
Machine Id
**04WEA80811**
Component
**Wind Turbine Gearbox**
Fluid
**MOBIL XMP 320 (--- LTR)**

## DIAGNOSIS

**Recommendation**
Resample at the next service interval to monitor.

**Wear**
All component wear rates are normal.

**Contamination**
There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

**Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Sample Number | | Client Info | | **NX05928239** | NX05700261 | NX05602740 |
| Sample Date | | Client Info | | **08 Mar 2023** | 29 Sep 2022 | 05 Apr 2022 |
| Machine Age | mths | Client Info | | **0** | 0 | 0 |
| Oil Age | mths | Client Info | | **0** | 0 | 0 |
| Oil Changed | | Client Info | | **N/A** | N/A | N/A |
| Sample Status | | | | **NORMAL** | NORMAL | ATTENTION |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| PQ | | ASTM D8184 | >80 | **17** | 12 | 19 |
| Iron | ppm | ASTM D5185m | >150 | **93** | 65 | 52 |
| Chromium | ppm | ASTM D5185m | >5 | **<1** | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | **0** | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >10 | **0** | 0 | 0 |
| Silver | ppm | ASTM D5185m | | **0** | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >10 | **0** | 0 | <1 |
| Lead | ppm | ASTM D5185m | >20 | **0** | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | **<1** | <1 | <1 |
| Tin | ppm | ASTM D5185m | >10 | **0** | 0 | <1 |
| Antimony | ppm | ASTM D5185m | >5 | **---** | --- | --- |
| Vanadium | ppm | ASTM D5185m | | **0** | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | **0** | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Boron | ppm | ASTM D5185m | | **0** | 0 | <1 |
| Barium | ppm | ASTM D5185m | | **0** | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | **6** | 4 | <1 |
| Manganese | ppm | ASTM D5185m | | **1** | 1 | <1 |
| Magnesium | ppm | ASTM D5185m | | **<1** | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | **8** | 3 | 0 |
| Phosphorus | ppm | ASTM D5185m | 315 | **370** | 364 | 254 |
| Zinc | ppm | ASTM D5185m | | **28** | 26 | 17 |
| Sulfur | ppm | ASTM D5185m | | **14061** | 14093 | 9503 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Silicon | ppm | ASTM D5185m | >50 | **4** | 3 | 2 |
| Sodium | ppm | ASTM D5185m | >20 | **0** | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | **0** | 0 | 0 |
| Water | % | ASTM D6304 | >0.05 | **0.012** | 0.020 | 0.012 |
| ppm Water | ppm | ASTM D6304 | >500 | **128.3** | 200.5 | 124.1 |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Particles >4µm | | ASTM D7647 | | **4712** | 1976 | 9184 |
| Particles >6µm | | ASTM D7647 | >2500 | **371** | 331 | ▲ 2647 |
| Particles >14µm | | ASTM D7647 | >320 | **23** | 25 | 129 |
| Particles >21µm | | ASTM D7647 | >80 | **8** | 6 | 14 |
| Particles >38µm | | ASTM D7647 | >20 | **2** | 0 | 2 |
| Particles >71µm | | ASTM D7647 | >4 | **1** | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >--/18/15 | **19/16/12** | 18/16/12 | ▲ 20/19/14 |

# OIL ANALYSIS REPORT

Water

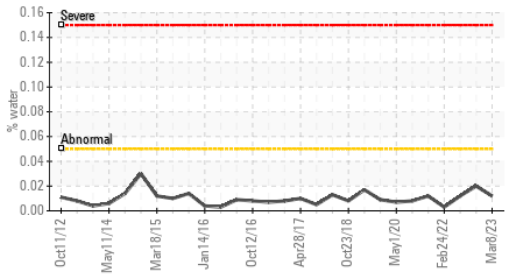


PQ

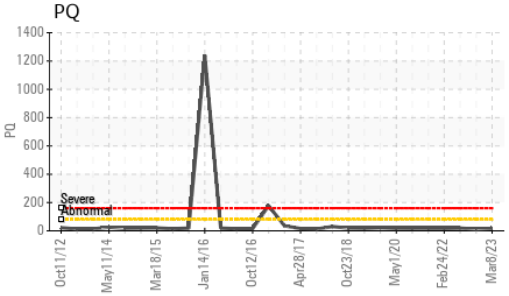


Particle Trend

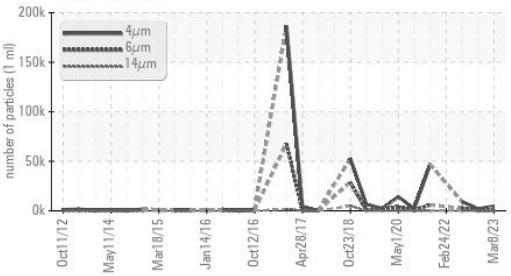


Viscosity @ 40°C

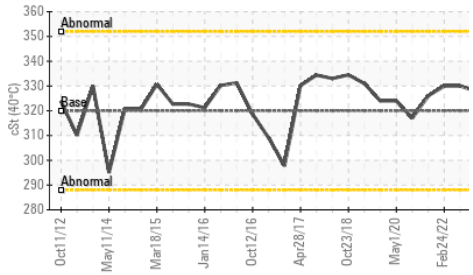


PQ

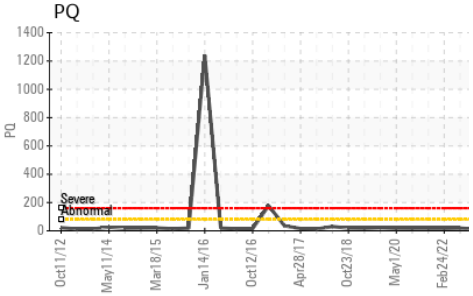


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | **1.15** | 1.14 | 1.05 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| White Metal | scalar | *Visual | NONE | **LIGHT** | NONE | LIGHT |
| Yellow Metal | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Silt | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Debris | scalar | *Visual | NONE | **NONE** | LIGHT | NONE |
| Sand/Dirt | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Appearance | scalar | *Visual | NORML | **NORML** | NORML | NORML |
| Odor | scalar | *Visual | NORML | **NORML** | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | **NEG** | NEG | NEG |
| Free Water | scalar | *Visual | | **NEG** | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Visc @ 40°C | cSt | ASTM D445 | 320 | **325** | 328 | 330 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|
| Color | | | | | |
| Bottom | | | | | |

## GRAPHS

Ferrous Alloys

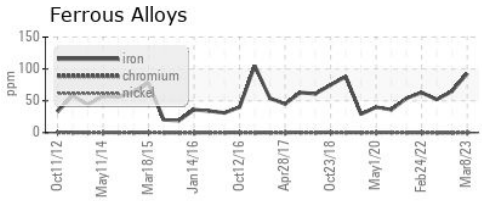


Non-ferrous Metals

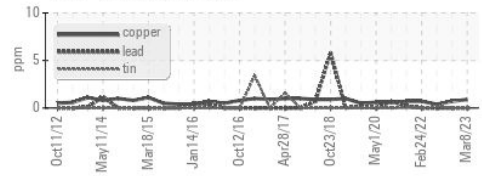


Viscosity @ 40°C

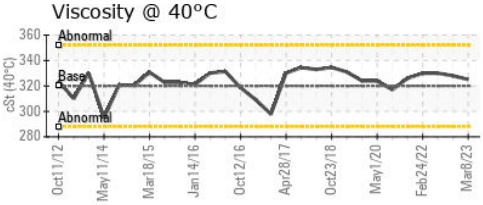


Particle Count

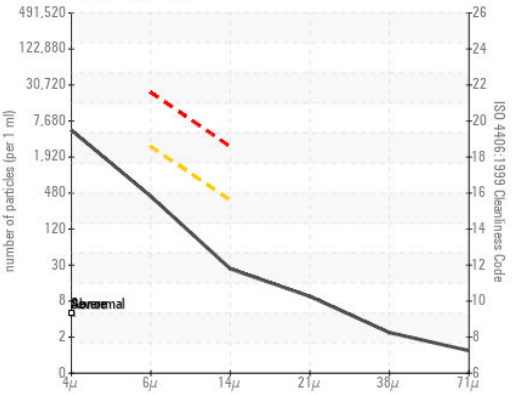


Acid Number

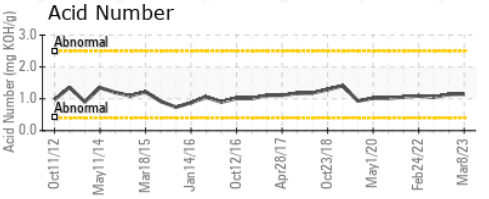


Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513
**Sample No.** : NX05928239 **Received** : 18 Aug 2023
**Lab Number** : 05928239 **Diagnosed** : 21 Aug 2023
**Unique Number** : 10608186 **Diagnostician** : Doug Bogart
**Test Package** : IND 2 ( Additional Tests: KF, PQ, PrtCount )

*To discuss this sample report, contact Customer Service at 1-800-237-1369.*
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
*Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*

**NORDEX USA - HIGHLAND & HIGHLAND NORTH**
300 SOUTH WACKER DRIVE, SUITE 1500
CHICAGO, IL
US 60606
Contact: Robert Warner
rwarner@everpower.com
T: x:
F: x: