

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

BUSCH VM2 / VP-2 (S/N 2512909)

Pump Fluid USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






SAMPLE INFORM	ΙΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info	in the babb	USPM29252	USPM28912	USPM26250
Sample Date		Client Info		19 Aug 2023	11 May 2023	26 Jan 2023
Machine Age	bro	Client Info		19 Aug 2023	,	0
Oil Age	hrs			0	0	0
•	hrs	Client Info		N/A	0 N/A	0 N/A
Oil Changed		Client Info				
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	17	17	16
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>7	2	<1	2
Lead	ppm	ASTM D5185m	>12	0	0	0
Copper	ppm	ASTM D5185m	>30	<1	1	<1
Tin	ppm	ASTM D5185m	>9	<1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	2	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	<1	<1	0
Calcium	ppm	ASTM D5185m	0	12	14	4
Phosphorus	ppm	ASTM D5185m	1800	1370	1379	1417
Zinc	ppm	ASTM D5185m	0	5	8	8
Sulfur	ppm	ASTM D5185m	0	10	2	17
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	2	2	1
Sodium	ppm	ASTM D5185m		7	5	10
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water	%	ASTM D6304		0.057	0.061	0.024
ppm Water	ppm	ASTM D6304	>.1	577.0	619.1	246.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1960	▲ 5049	1635
Particles >6µm		ASTM D7647	>1300	619	1289	548
Particles >14µm		ASTM D7647	>160	81	97	39
Particles >21µm		ASTM D7647	>40	25	20	9
Particles >38µm		ASTM D7647	>10	2	2	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/14	▲ 20/17/14	18/16/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.88	0.84	0.73


Report Id: IBPDAK01 [WUSCAR] 05928264 (Generated: 08/21/2023 11:44:33) Rev: 1


Contact/Location: RICHARD KOCH - IBPDAK01



OIL ANALYSIS REPORT






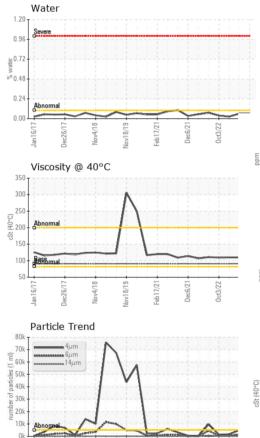

ACJ6/

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	91	112	110	110
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						
Bottom						

Bottom

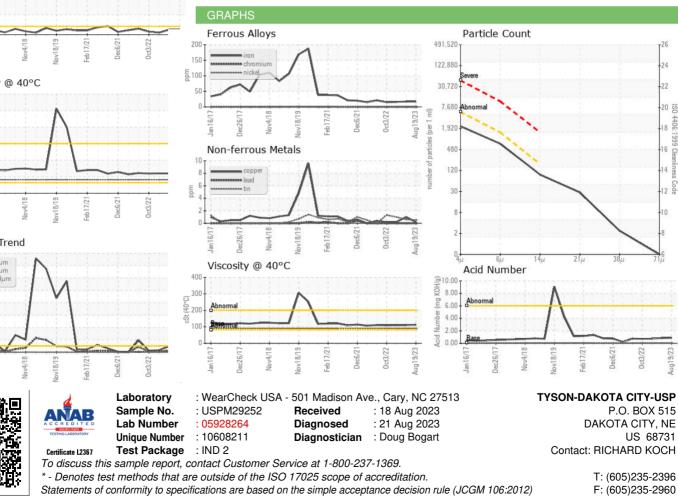

Contact/Location: RICHARD KOCH - IBPDAK01