




# PROBLEM SUMMARY

Sample Rating Trend

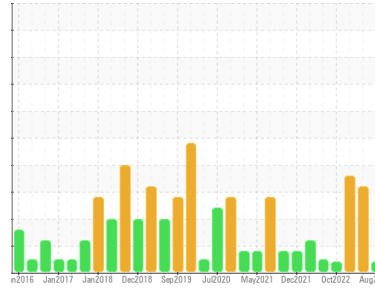

VIS DEBRIS



Machine Id  
**TYSDAKPRO HYD 2 BRISKET CLIPPER (S/N X0337XFMNTHAC03)**  
 Component  
**Hydraulic System**  
 Fluid  
**USPI FG HYD 46 (--- GAL)**

## COMPONENT CONDITION SUMMARY

No relevant graphs to display

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	ABNORMAL	ABNORMAL
Debris	scalar *Visual	NONE	▲ MODER	▲ MODER LIGHT

Customer Id: IBPDAK01  
 Sample No.: USPM29250  
 Lab Number: 05928333  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

## HISTORICAL DIAGNOSIS

### 11 May 2023 Diag: Doug Bogart

DIRT



We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. Moderate concentration of visible metal present. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. Elemental level of silicon (Si) above normal. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 25 Jan 2023 Diag: Jonathan Hester

DIRT



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 03 Oct 2022 Diag: Doug Bogart

VIS DEBRIS



We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

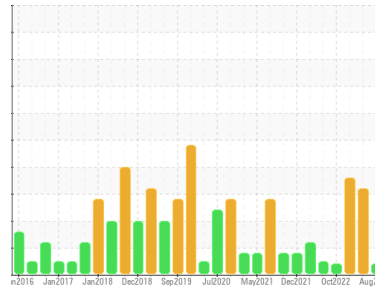

VIS DEBRIS



Machine Id  
**TYSDAKPRO HYD 2 BRISKET CLIPPER (S/N X0337XFMNTHAC03)**

Component  
**Hydraulic System**

Fluid  
**USPI FG HYD 46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>USPM29250</b>	USPM28881	USPM26219
Sample Date	Client Info		<b>19 Aug 2023</b>	11 May 2023	25 Jan 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>&lt;1</b>	6	3
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>3</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	9	0
Calcium	ppm	ASTM D5185m	<b>2</b>	0	<1
Phosphorus	ppm	ASTM D5185m 725	<b>554</b>	528	530
Zinc	ppm	ASTM D5185m	<b>13</b>	23	9
Sulfur	ppm	ASTM D5185m 625	<b>631</b>	601	630

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>3</b>	▲ 40	▲ 28
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	4	0
Water	%	ASTM D6304 >0.05	<b>0.002</b>	0.004	0.004
ppm Water	ppm	ASTM D6304 >500	<b>21.9</b>	48.9	41.6

## FLUID CLEANLINESS




	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	---	---	▲ 85817
Particles >6µm	ASTM D7647	>1300	---	---	▲ 17271
Particles >14µm	ASTM D7647	>160	---	---	▲ 511
Particles >21µm	ASTM D7647	>40	---	---	▲ 80
Particles >38µm	ASTM D7647	>10	---	---	6
Particles >71µm	ASTM D7647	>3	---	---	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	---	---	▲ 24/21/16

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.36	<b>0.35</b>	0.33	0.34




# OIL ANALYSIS REPORT

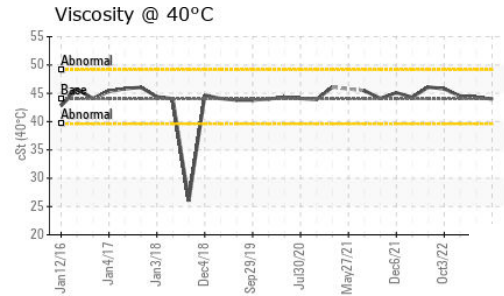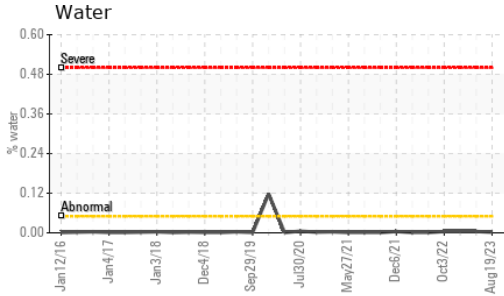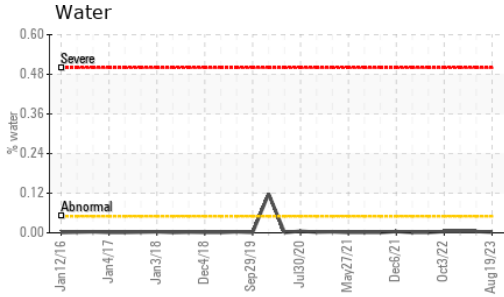





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	▲ MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	▲ MODER	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	44	<b>44.0</b>	44.3	44.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

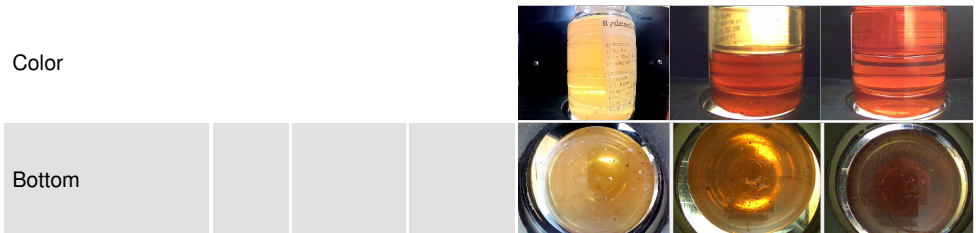

## GRAPHS

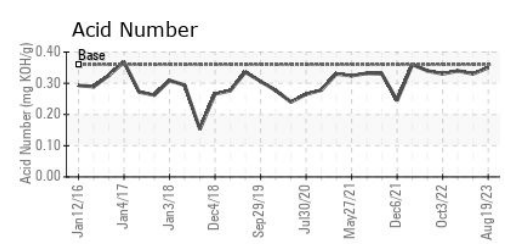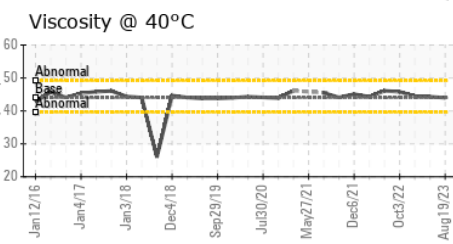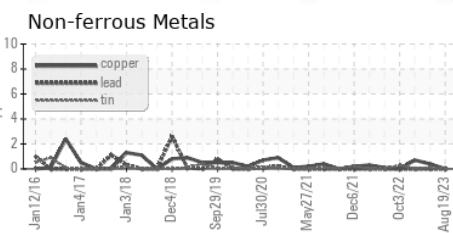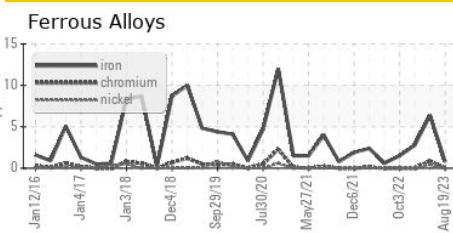

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USPM29250 **Received** : 18 Aug 2023  
**Lab Number** : 05928333 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10608280 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**TYSON-DAKOTA CITY-USP**  
 P.O. BOX 515  
 DAKOTA CITY, NE  
 US 68731  
 Contact: RICHARD KOCH

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (605)235-2396  
 F: (605)235-2960