


PROBLEM SUMMARY

SOUTH MASSAGER 1

Hydraulic System Fluid NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

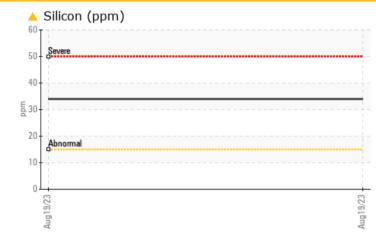

RECOMMENDATION

Please specify the brand and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL				
Silicon	ppm	ASTM D5185m	>15	<u> </u>				


Customer Id: TYSSAI Sample No.: USPM29184 Lab Number: 05928336 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

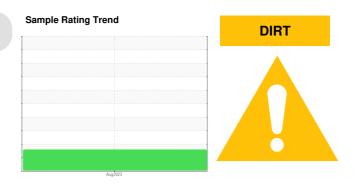

RECOMMENDED AC	ENDED ACTIONS					
Action	Status	Date	Done By	Description		
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

DIRT

SOUTH MASSAGER 1

Hydraulic System Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

A Recommendation

Please specify the brand and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		USPM29184		
Sample Date		Client Info		19 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m	20	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m	20	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		117		
Zinc		ASTM D5185m		5		
Sulfur	ppm	ASTM D5185m		5 1745		
	ppm			-		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<mark>▲</mark> 34		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%		>0.05	0.002		
ppm Water	ppm	ASTM D6304	>500	24.2		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1029		
Particles >6µm		ASTM D7647	>1300	248		
Particles >14µm		ASTM D7647	>160	22		
Particles >21µm		ASTM D7647	>40	5		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.39		



OIL ANALYSIS REPORT

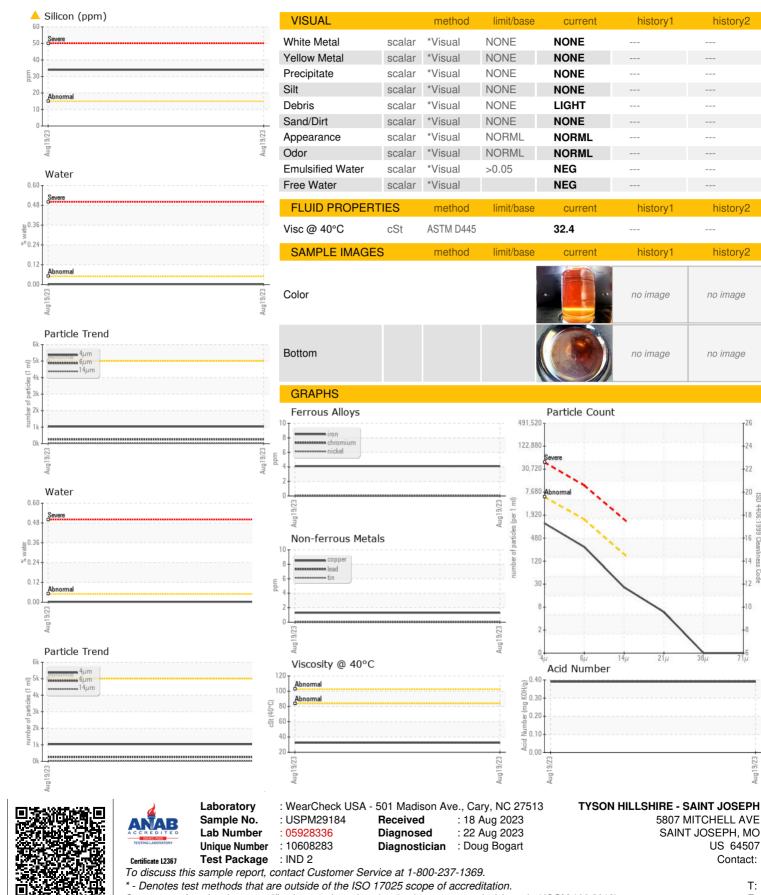

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

history2

history2

history2

no image

no image

4406

:1999 Cle

14

5807 MITCHELL AVE

SAINT JOSEPH, MO

US 64507

Contact:

21µ