


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



FSE FSE-3 - BRIDGESTONE (S/N B8EU2E017)

Component

Compressor

TURBO COOL (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jun202	2 Dec2022	Jun2023 As	ig2023	
SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC05928388	WC0772713	WC0682223
Sample Date		Client Info		16 Aug 2023	27 Jun 2023	22 Dec 2022
Machine Age	hrs	Client Info		1906	31504	27036
Oil Age	hrs	Client Info		0	13415	8947
Oil Changed	1110	Client Info		N/A	Not Changd	Not Changd
Sample Status		Oliciti IIIIo		NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel		ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
	ppm		. 05			-
Aluminum	ppm	ASTM D5185m	>25	0	<1	0
Lead	ppm	ASTM D5185m	>25	1	0	<1
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		449	417	384
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		1	13	<1
Calcium	ppm	ASTM D5185m		2	5	0
Phosphorus	ppm	ASTM D5185m		11	33	50
Zinc	ppm	ASTM D5185m		6	27	0
Sulfur	ppm	ASTM D5185m		270	243	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		3	6	6
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.22	0.18	0.210
MPC Varnish Potential	Scale	ASTM D7843	>15	1	1	1
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Eman Mater	oogle.	*\/:	-0.1	NEO	· Dolltoopurcham	

: DaNasoBurcham - ANRGREWC

NEG



OIL ANALYSIS REPORT

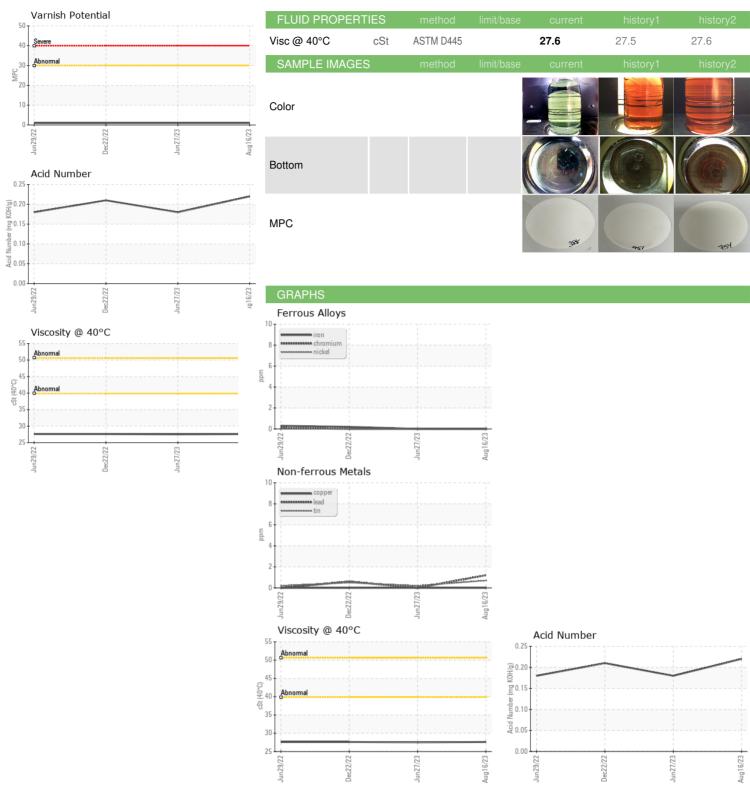





Report Id: AIRGREWC [WUSCAR] 05928388 (Generated: 08/24/2023 07:50:04) Rev: 2

Laboratory Sample No. Lab Number Unique Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05928388

: WC05928388 : 10608335

Received Diagnosed

: 18 Aug 2023 : 23 Aug 2023 Diagnostician : Doug Bogart

Test Package : IND 2 (Additional Tests: MPC)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **FS-COMPRESSION CO, LLC**

203 AERO COURT GREENSBORO, NC US 27409

Contact: Dallas Burcham

dallas.burcham@fs-compression.com

T: (336)605-9622 F: (336)605-9844

Contact/Location: Dallas Burcham - AIRGREWC





Report Id: AIRGREWC [WUSCAR] 05928388 (Generated: 08/24/2023 07:50:09) Rev: 2

This page left intentionally blank