




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

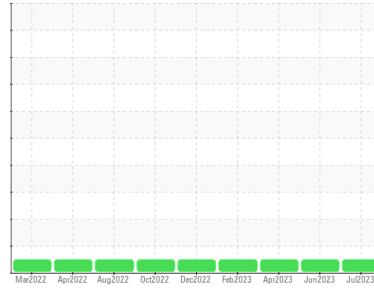

Machine Id  
**211** []  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0003834</b>	SBP0003803	SBP0000855
Sample Date	Client Info		<b>27 Jul 2023</b>	20 Jun 2023	10 Apr 2023
Machine Age	hrs	Client Info	<b>9095</b>	8822	8367
Oil Age	hrs	Client Info	<b>273</b>	455	284
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>2</b>	3	2
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	0
Aluminum	ppm	ASTM D5185m >30	<b>1</b>	0	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	60	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>1009</b>	948	963
Calcium	ppm	ASTM D5185m 1070	<b>1116</b>	1089	1129
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	1032	1034
Zinc	ppm	ASTM D5185m 1270	<b>1257</b>	1247	1241
Sulfur	ppm	ASTM D5185m 2060	<b>3757</b>	3282	3475

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	3	2
Sodium	ppm	ASTM D5185m	<b>4</b>	1	4
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	0

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.5</b>	6.3	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.1</b>	18.5	17.8

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.1</b>	15.2	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.8</b>	8.3	8.9







# OIL ANALYSIS REPORT

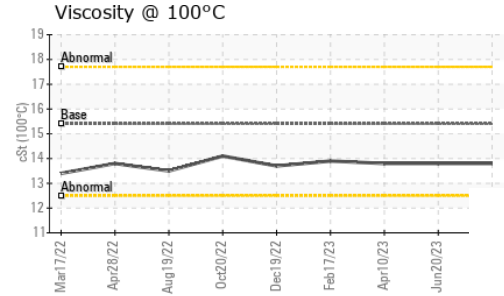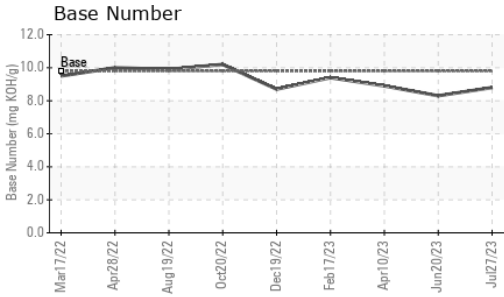

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.8	13.8

## GRAPHS

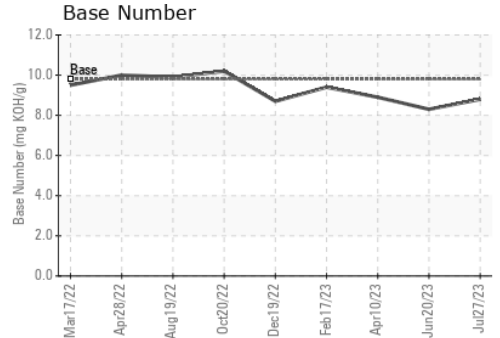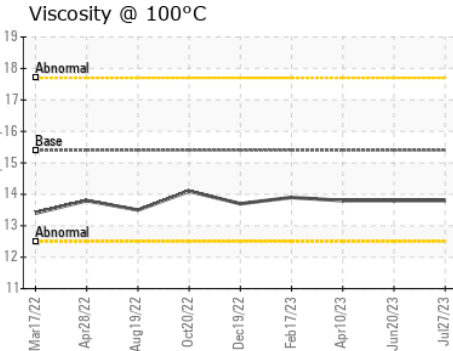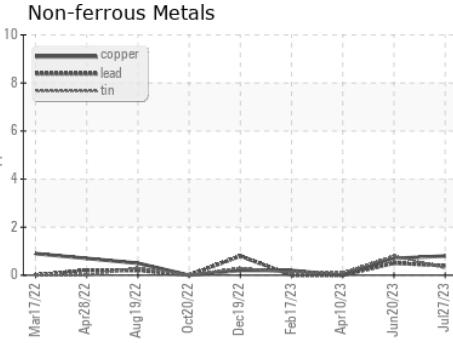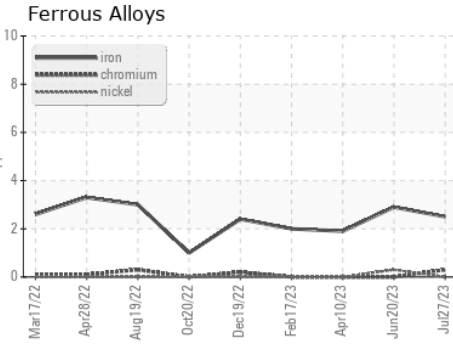

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0003834 **Received** : 18 Aug 2023  
**Lab Number** : 05928651 **Diagnosed** : 20 Aug 2023  
**Unique Number** : 10608598 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**Western Sand and Gravel - 604602**  
 248 CO Road G  
 Ashland, NE  
 US 68003  
 Contact: ZACH SPURLOCK  
 zachs@westernsand.com  
 T: (402)944-3084  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)