




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
544 []
Component
Diesel Engine
Fluid
CAT FACTORY (--- GAL)

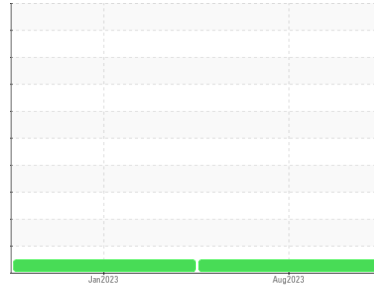

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	SBP0003837	SBP0000836	---
Sample Date	Client Info	15 Aug 2023	12 Jan 2023	---
Machine Age	hrs Client Info	250	80	---
Oil Age	hrs Client Info	250	80	---
Oil Changed	Client Info	Changed	Not Changd	---
Sample Status		NORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	29	15	---
Chromium	ppm ASTM D5185m >20	<1	<1	---
Nickel	ppm ASTM D5185m >2	<1	<1	---
Titanium	ppm ASTM D5185m >2	<1	0	---
Silver	ppm ASTM D5185m >2	<1	0	---
Aluminum	ppm ASTM D5185m >25	4	2	---
Lead	ppm ASTM D5185m >40	1	2	---
Copper	ppm ASTM D5185m >330	23	20	---
Tin	ppm ASTM D5185m >15	1	1	---
Vanadium	ppm ASTM D5185m	<1	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	46	66	---
Barium	ppm ASTM D5185m	0	5	---
Molybdenum	ppm ASTM D5185m	49	52	---
Manganese	ppm ASTM D5185m	2	2	---
Magnesium	ppm ASTM D5185m	471	493	---
Calcium	ppm ASTM D5185m	1993	2133	---
Phosphorus	ppm ASTM D5185m	919	1040	---
Zinc	ppm ASTM D5185m	1147	1188	---
Sulfur	ppm ASTM D5185m	3621	4022	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	25	27	---
Sodium	ppm ASTM D5185m	4	3	---
Potassium	ppm ASTM D5185m >20	4	2	---
Fuel	% ASTM D3524 >5	<1.0	1.0	---

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	8.0	6.4	---
Sulfation	Abs/.1mm *ASTM D7415 >30	21.9	21.0	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.6	18.1	---
Base Number (BN)	mg KOH/g ASTM D2896	9.6	10.0	---







OIL ANALYSIS REPORT

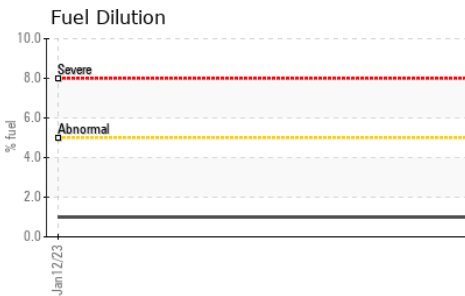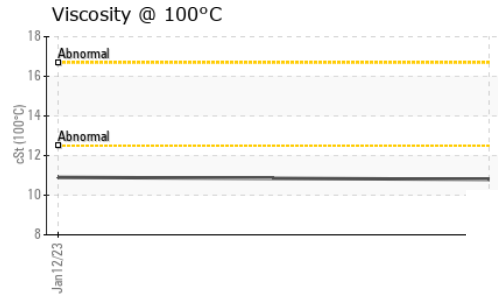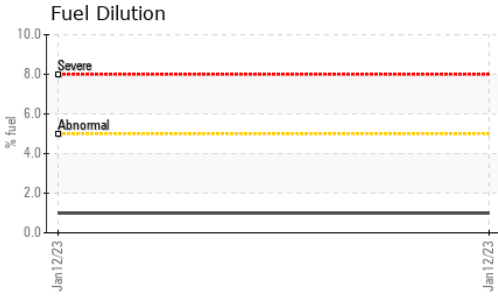

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.8	10.9	---

GRAPHS

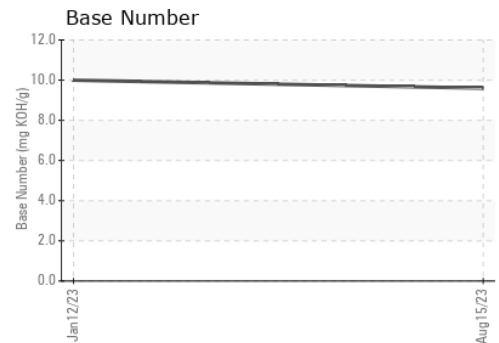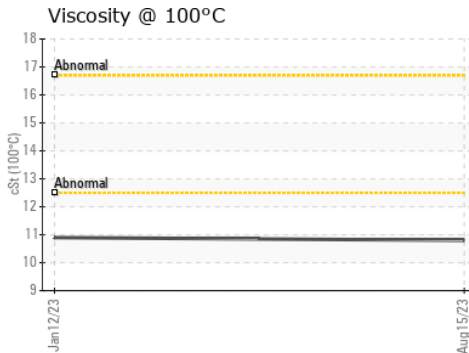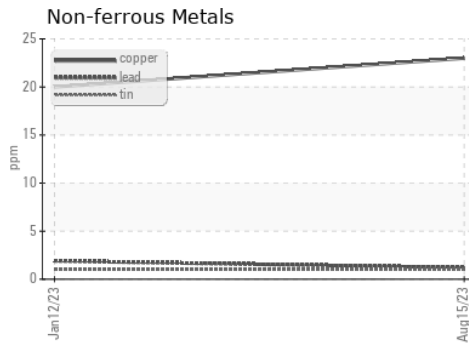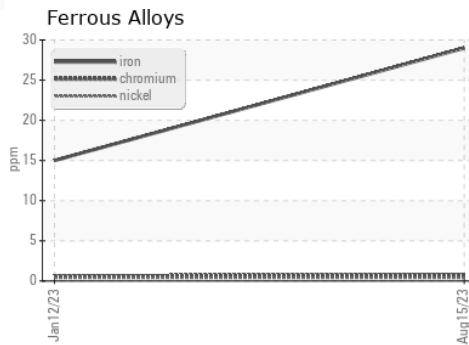

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0003837 **Received** : 18 Aug 2023
Lab Number : **05928654** **Diagnosed** : 21 Aug 2023
Unique Number : 10608601 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: FuelDilution, TBN)

Western Sand and Gravel - 604602
 248 CO Road G
 Ashland, NE
 US 68003
 Contact: ZACH SPURLOCK
 zachs@westernsand.com
 T: (402)944-3084
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)