



PROBLEM SUMMARY

Sample Rating Trend




WEAR




Area
SCHTRUCK
Machine Id
6431 [SCHTRUCK]
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

COMPONENT CONDITION SUMMARY


▲ Non-ferrous Metals

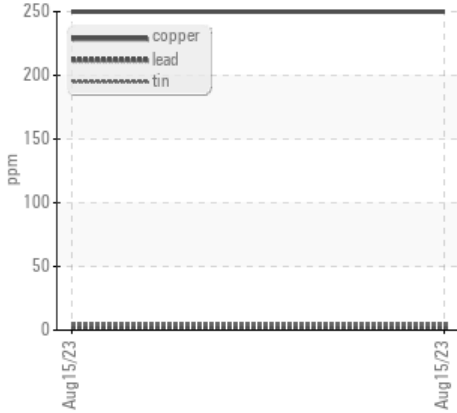

▲ Viscosity @ 100°C

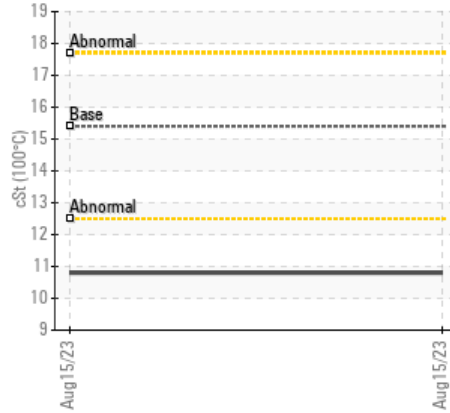

Aluminum (ppm)

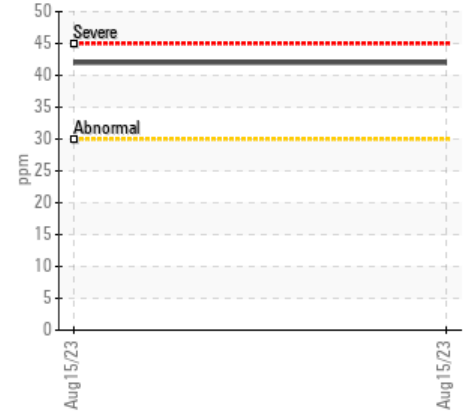

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Copper	ppm	ASTM D5185m	>30	▲ 250	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	---	---

Customer Id: SCHPLA
Sample No.: SBP0005086
Lab Number: 05928660
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
SCHTRUCK
 Machine Id
6431 [SCHTRUCK]

Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	SBP0005086	---	---
Sample Date	Client Info	15 Aug 2023	---	---
Machine Age	hrs	Client Info	36102	---
Oil Age	hrs	Client Info	36102	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >200	70	---	---
Chromium	ppm	ASTM D5185m >20	4	---	---
Nickel	ppm	ASTM D5185m >2	1	---	---
Titanium	ppm	ASTM D5185m >2	<1	---	---
Silver	ppm	ASTM D5185m >2	<1	---	---
Aluminum	ppm	ASTM D5185m >30	42	---	---
Lead	ppm	ASTM D5185m >30	2	---	---
Copper	ppm	ASTM D5185m >30	250	---	---
Tin	ppm	ASTM D5185m >15	4	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	24	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 60	47	---	---
Manganese	ppm	ASTM D5185m 0	4	---	---
Magnesium	ppm	ASTM D5185m 1010	606	---	---
Calcium	ppm	ASTM D5185m 1070	1804	---	---
Phosphorus	ppm	ASTM D5185m 1150	751	---	---
Zinc	ppm	ASTM D5185m 1270	933	---	---
Sulfur	ppm	ASTM D5185m 2060	1964	---	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	8	---	---
Sodium	ppm	ASTM D5185m	7	---	---
Potassium	ppm	ASTM D5185m >20	119	---	---
Fuel	%	ASTM D3524 >3.0	0.5	---	---

INFRA-RED






method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624 >20	12.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.4	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	28.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	5.8	---	---







OIL ANALYSIS REPORT

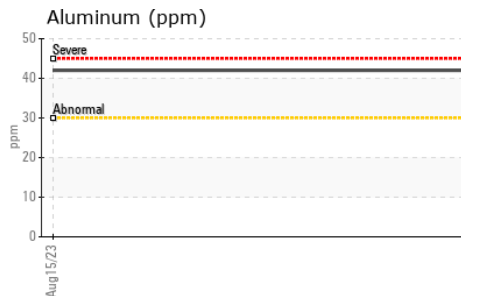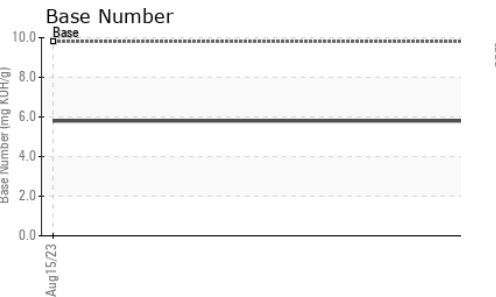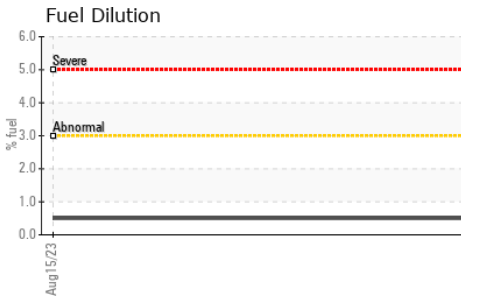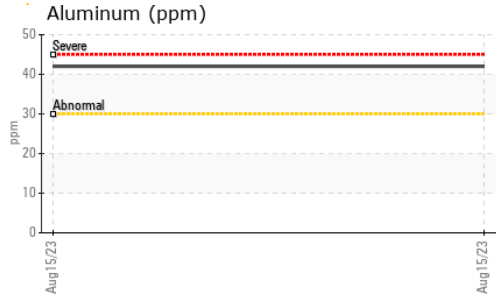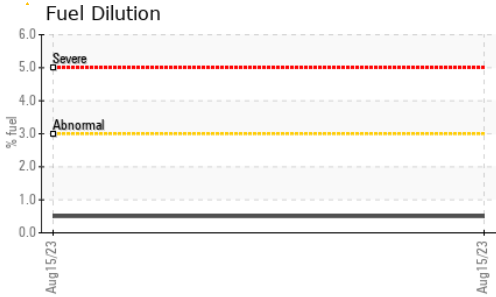

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	---

GRAPHS

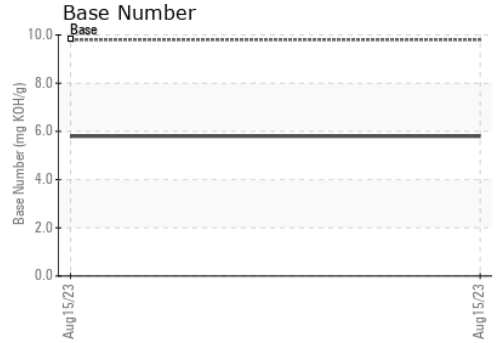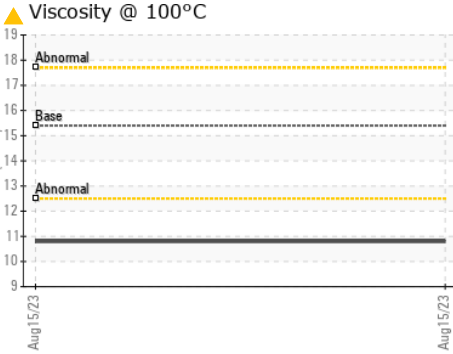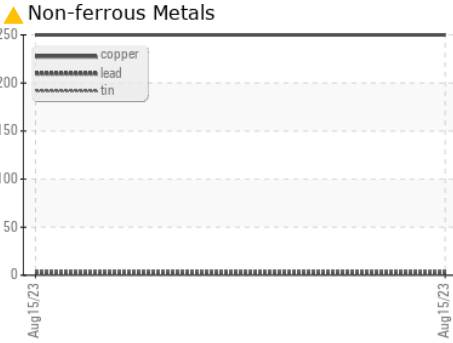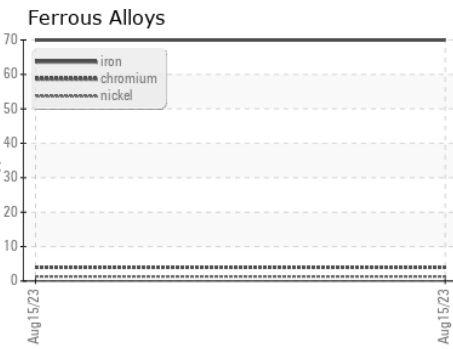

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005086 **Received** : 18 Aug 2023
Lab Number : 05928660 **Diagnosed** : 22 Aug 2023
Unique Number : 10608607 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SCHMIDT TRANSPORTATION - 605449
 108 E Bay Road
 Plattsmouth, NE
 US 68048
 Contact: NICK DOTY
 doty@liquidtrucking.com
 T: (402)949-9398
 F: