




# OIL ANALYSIS REPORT

Sample Rating Trend

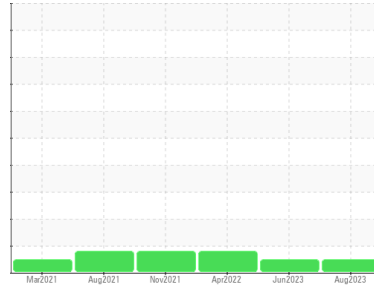

**NORMAL**



Area  
**[18459]**  
 Machine Id  
**50-101**

Component  
**Diesel Engine**  
 Fluid

**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0793342</b>	WC0738893	WC0619284
Sample Date	Client Info		<b>09 Aug 2023</b>	01 Jun 2023	25 Apr 2022
Machine Age	hrs	Client Info	<b>5370</b>	4593	4593
Oil Age	hrs	Client Info	<b>777</b>	4593	250
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>51	<b>42</b>	31	23
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>31	<b>4</b>	1	3
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>26	<b>5</b>	12	▲ 116
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	85	<b>54</b>	74	56
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>43</b>	30	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	350	<b>408</b>	731	784
Calcium	ppm	ASTM D5185m	1800	<b>1688</b>	1492	1439
Phosphorus	ppm	ASTM D5185m	1000	<b>994</b>	1132	1122
Zinc	ppm	ASTM D5185m	1100	<b>1205</b>	1351	1312
Sulfur	ppm	ASTM D5185m	3500	<b>4021</b>	4684	3435

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>22	<b>10</b>	9	8
Sodium	ppm	ASTM D5185m	>31	<b>3</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	<1

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.8</b>	7.8	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	20.4	22.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.4</b>	15.4	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	<b>6.9</b>	8.4	8.9







# OIL ANALYSIS REPORT

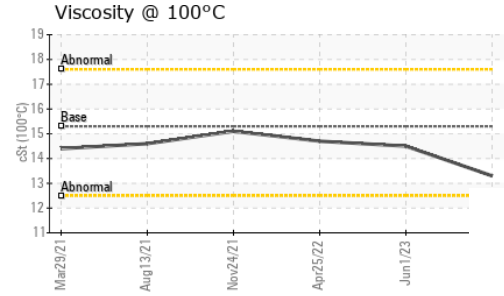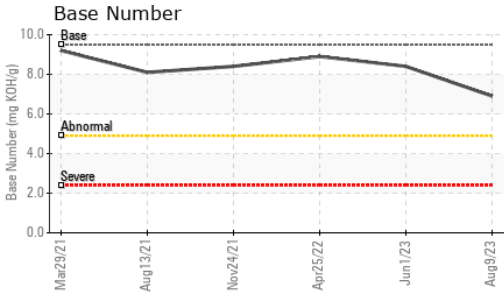

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.3</b>	14.5	14.7

### GRAPHS

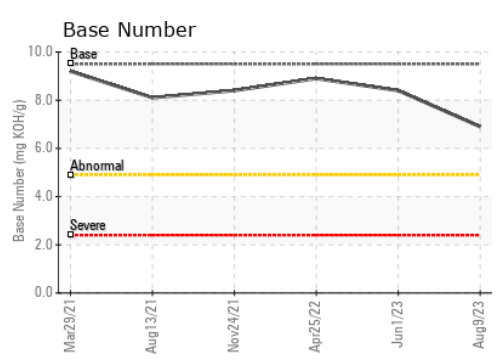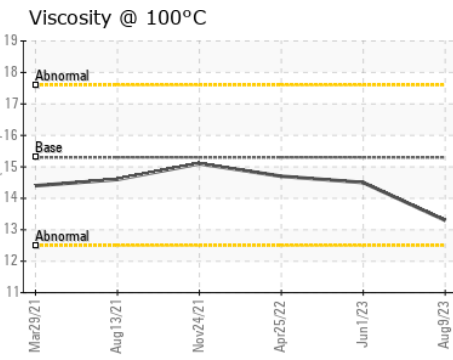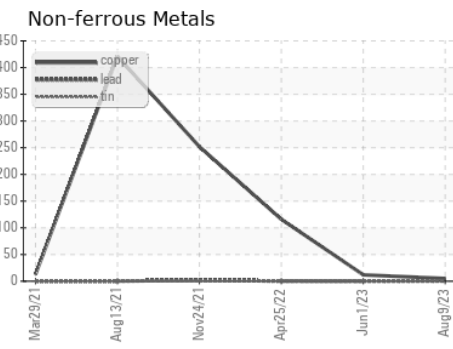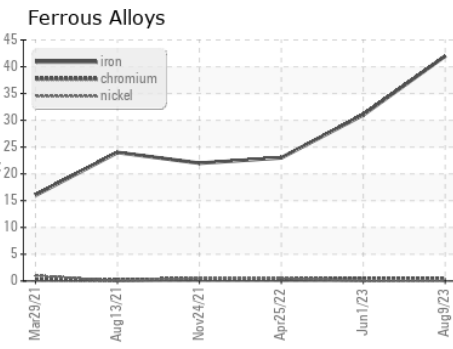

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0793342 **Received** : 18 Aug 2023  
**Lab Number** : **05928698** **Diagnosed** : 21 Aug 2023  
**Unique Number** : 10608645 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com  
 T: (918)728-5749  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)