

OIL ANALYSIS REPORT

STOCK PREP Machine Id 57-1000 STK PREP PULPER

Component

Gear Reducer

NOT GIVEN (--- GAL)

Sample Rating Trend NORMAL Aug/023

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Moor

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in

| | | | | Aug2023 | | |
|-----------------|--------|--------------|------------|-------------|----------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | PE0000968 | | |
| Sample Date | | Client Info | | 19 Aug 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 12 | | |
| Iron | ppm | ASTM D5185m | >150 | 2 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | | |
| Lead | ppm | ASTM D5185m | >100 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | 3 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 2 | | |
| Calcium | ppm | ASTM D5185m | | 6 | | |
| Phosphorus | ppm | ASTM D5185m | | 529 | | |
| Zinc | ppm | ASTM D5185m | | 9 | | |
| Sulfur | ppm | ASTM D5185m | | 613 | | |
| CONTAMINANTS | 5 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 16 | | |
| Sodium | ppm | ASTM D5185m | | 4 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | 864 | | |
| Particles >6µm | | ASTM D7647 | >5000 | 153 | | |
| Particles >14µm | | ASTM D7647 | >640 | 18 | | |
| Particles >21µm | | ASTM D7647 | >160 | 7 | | |
| Particles >38µm | | ASTM D7647 | >40 | 1 | | |
| Particles >71µm | | ASTM D7647 | >10 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | 17/14/11 | | |
| FLUID DEGRADA | NOITA | method | limit/base | current | history1 | history2 |
| | 1/01// | AOTH B0045 | | | | |


Acid Number (AN)

mg KOH/g ASTM D8045

0.58



OIL ANALYSIS REPORT

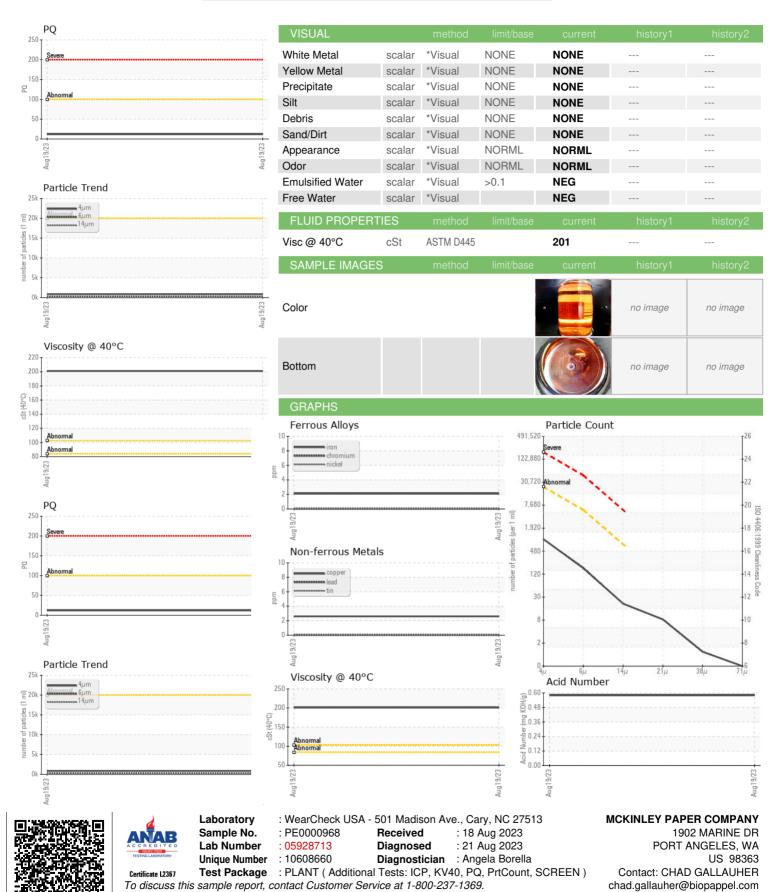

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (360)457-4474