


OIL ANALYSIS REPORT

Sample Rating Trend



ISO



2887474 - SUNBELT

Component

Hydraulic System

AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2022	May2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0803589	WC0664474	
Sample Date		Client Info		01 May 2023	28 Apr 2022	
Machine Age	yrs	Client Info		0	6	
Oil Age	vrs	Client Info		0	6	
Oil Changed	yıo	Client Info		Not Changd	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m	>10	0	0	
Silver		ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead		ASTM D5185m	>10	0	<1	
	ppm			2	2	
Copper Tin	ppm	ASTM D5185m	>75 >10		<1	
	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	<1	
Barium	ppm	ASTM D5185m	5	0	0	
Molybdenum	ppm	ASTM D5185m	5	<1	<1	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	25	1	<1	
Calcium	ppm	ASTM D5185m	200	49	46	
Phosphorus	ppm	ASTM D5185m	300	325	374	
Zinc	ppm	ASTM D5185m	370	391	427	
Sulfur	ppm	ASTM D5185m	2500	5136	4679	
CONTAMINANTS	}	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	0	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	▲ 51298	△ 23766	
Particles >6µm		ASTM D7647	>1300	9246	▲ 3800	
Particles >14µm		ASTM D7647	>160	164	<u>^</u> 201	
Particles >21µm		ASTM D7647	>40	37	4 3	
Particles >38µm		ASTM D7647	>10	1	3	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	23/20/15	<u>22/19/15</u>	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
	ma KOU/a	VCTM DOUVE		0.42	0.40	


Acid Number (AN) mg KOH/g ASTM D8045 0.57

0.42

0.43



OIL ANALYSIS REPORT

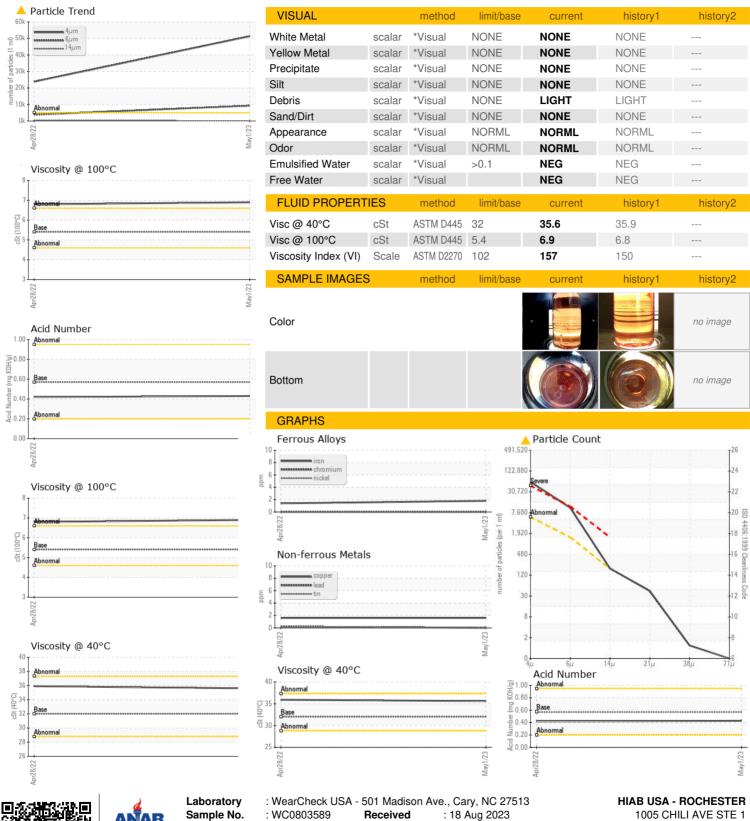





Certificate L2367

Sample No. Lab Number **Unique Number**

: WC0803589 : 05928777 : 10608724

Received Diagnosed

: 22 Aug 2023 Diagnostician : Don Baldridge

Test Package : MOB 2 (Additional Tests: KV100, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) 1005 CHILI AVE STE 1

ROCHESTER, NY US 14611-2807 Contact: RON SCALERA

ron.scalera@hiab.com T:

Contact/Location: RON SCALERA - CARROC

F: