




OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Machine Id
18-087514-2
Component
Transmission
Fluid
NOT GIVEN (--- GAL)

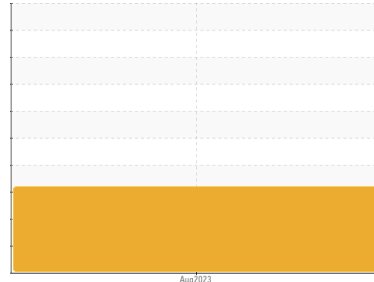

DIAGNOSIS

- Recommendation**
Please specify the brand, type, and viscosity of the oil on your next sample.
- Wear**
The lead level is abnormal. All other component wear rates are normal.
- Contamination**
There is a high amount of silt (particulates < 14 microns in size) present in the fluid.
- Fluid Condition**
The AN level is above the recommended limit.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843143	---	---
Sample Date	Client Info		17 Aug 2023	---	---
Machine Age	hrs	Client Info	400	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	0	---
Chromium	ppm	ASTM D5185m	>10	0	---
Nickel	ppm	ASTM D5185m		0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m		0	---
Aluminum	ppm	ASTM D5185m	>50	<1	---
Lead	ppm	ASTM D5185m	>50	▲ 22799	---
Copper	ppm	ASTM D5185m	>200	78	---
Tin	ppm	ASTM D5185m	>10	0	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		76	---
Barium	ppm	ASTM D5185m		0	---
Molybdenum	ppm	ASTM D5185m		0	---
Manganese	ppm	ASTM D5185m		0	---
Magnesium	ppm	ASTM D5185m		0	---
Calcium	ppm	ASTM D5185m		123	---
Phosphorus	ppm	ASTM D5185m		218	---
Zinc	ppm	ASTM D5185m		0	---
Sulfur	ppm	ASTM D5185m		1585	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	---
Sodium	ppm	ASTM D5185m		0	---
Potassium	ppm	ASTM D5185m	>20	<1	---
Water	%	ASTM D6304	>0.1	0.021	---
ppm Water	ppm	ASTM D6304	>1000	214.9	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 25114	---	---
Particles >6µm	ASTM D7647	>2500	▲ 5268	---	---
Particles >14µm	ASTM D7647	>320	273	---	---
Particles >21µm	ASTM D7647	>80	68	---	---
Particles >38µm	ASTM D7647	>20	2	---	---
Particles >71µm	ASTM D7647	>4	0	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 22/20/15	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	▲ 9.742	---	---



OIL ANALYSIS REPORT

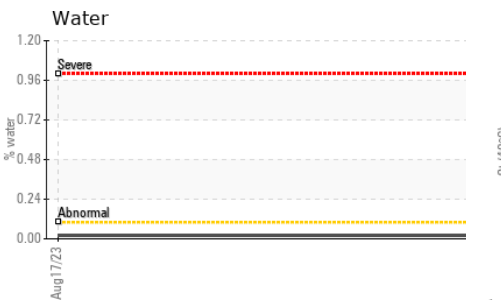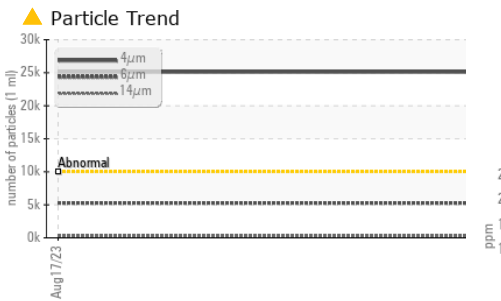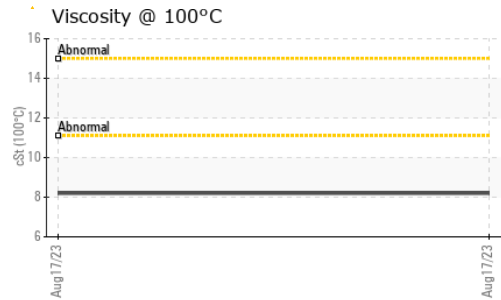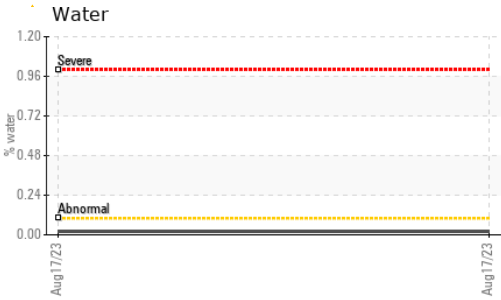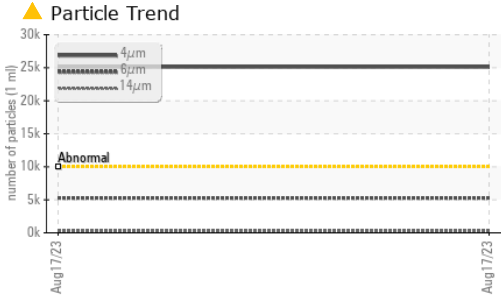






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.5	---	---
Visc @ 100°C	cSt	ASTM D445	8.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270	155	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS

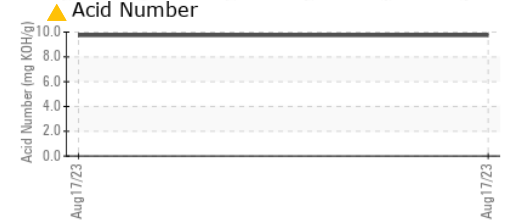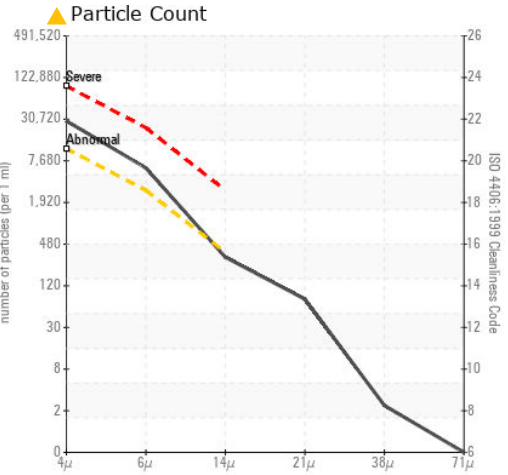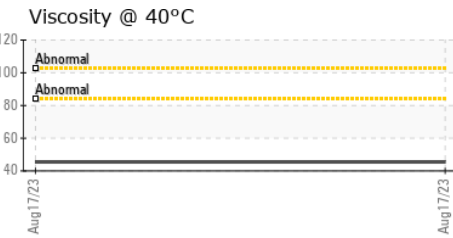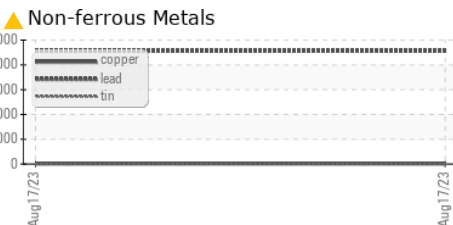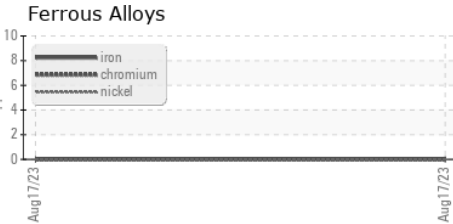

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843143 **Received** : 18 Aug 2023
Lab Number : 05928782 **Diagnosed** : 25 Aug 2023
Unique Number : 10608729 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)