

# **OIL ANALYSIS REPORT**

## KAESER AS 36 1473301 (S/N 1036) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

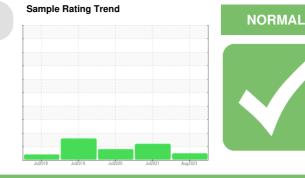

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005685	KCP42258	KCP23066
Sample Date		Client Info		14 Aug 2023	12 Jul 2021	10 Jul 2020
Machine Age	hrs	Client Info		49788	38905	34910
Oil Age	hrs	Client Info		6507	3995	2929
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	3	<1	1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	le le	method	limit/base	current	history1	history2
Boron		ASTM D5185m	0	0	19	<1
Barium	ppm	ASTM D5185m	90	0	0	0
	ppm		90 0	0	0	0
Molybdenum	ppm	ASTM D5185m ASTM D5185m	0	0	0	<1
Manganese Magnesium	ppm	ASTM D5185m	100	2	38	17
Calcium	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m	0	۰ <1	5	5
Phosphorus Zinc	ppm	ASTM D5185m		<1	10	5
-	ppm			-		
Sulfur	ppm	ASTM D5185m	23500	21717	17640	17761
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	1
Sodium	ppm	ASTM D5185m		0	5	3
Potassium	ppm	ASTM D5185m		0	<1	1
Water	%	ASTM D6304		0.006	0.011	0.018
ppm Water	ppm	ASTM D6304	>500	66.4	115.3	186.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5354	17141	9345
Particles >6µm		ASTM D7647	>1300	1139	<u> </u>	🔺 1578
Particles >14µm		ASTM D7647	>80	45	<b>1</b> 44	<b>A</b> 81
Particles >21µm		ASTM D7647	>20	13	<b>4</b> 35	17
Particles >38µm		ASTM D7647	>4	0	2	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/17/13	▲ 19/14	▲ 18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.50	0.415	0.397

Acid Number (AN) mg KOH/g ASTM D8045 1.0


Report Id: GIWGRO [WUSCAR] 05928806 (Generated: 08/21/2023 20:39:29) Rev: 1


0.50 0.415 0.397


Contact/Location: Amanda Sims - GIWGRO



# **OIL ANALYSIS REPORT**

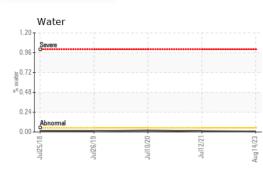


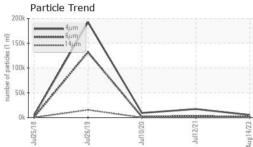

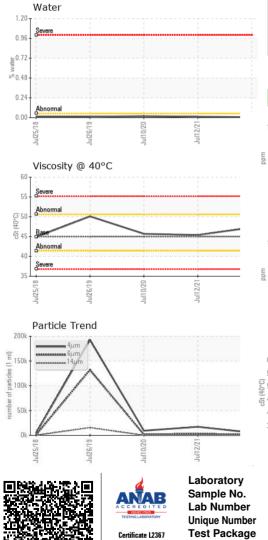

			1			
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.3	45.4	45.7
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
				1700		

Bottom

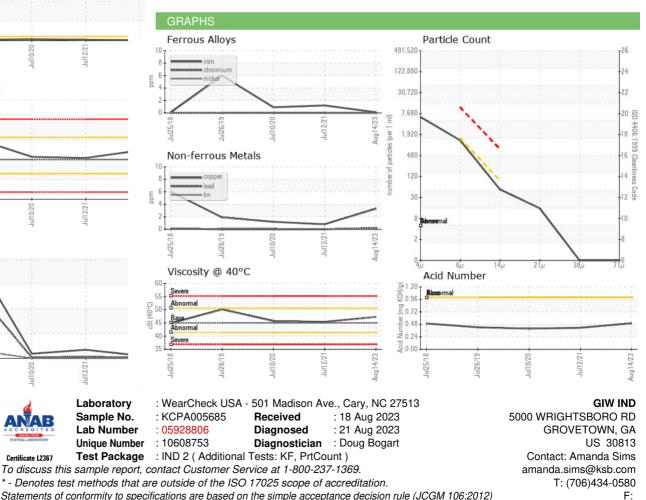

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)