




# OIL ANALYSIS REPORT

Sample Rating Trend

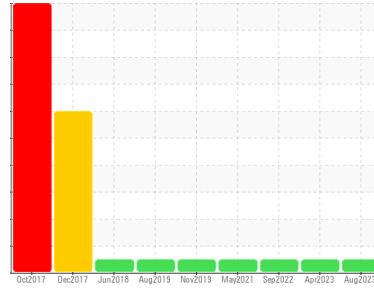

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**MACK MP7-365C 010091**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>SBP0004671</b>  | SBP0003730  | SBP0001370  |
| Sample Date   | Client Info |             | <b>16 Aug 2023</b> | 21 Apr 2023 | 15 Sep 2022 |
| Machine Age   | hrs         | Client Info | <b>8537</b>        | 8027        | 7357        |
| Oil Age       | hrs         | Client Info | <b>510</b>         | 670         | 572         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |    |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron     | ppm    | ASTM D5185m | >120    | <b>9</b>     | 12       | 19 |
| Chromium | ppm    | ASTM D5185m | >20     | <b>&lt;1</b> | <1       | <1 |
| Nickel   | ppm    | ASTM D5185m | >5      | <b>&lt;1</b> | 0        | <1 |
| Titanium | ppm    | ASTM D5185m | >2      | <b>0</b>     | 0        | 0  |
| Silver   | ppm    | ASTM D5185m | >2      | <b>0</b>     | 0        | 0  |
| Aluminum | ppm    | ASTM D5185m | >20     | <b>3</b>     | 2        | 4  |
| Lead     | ppm    | ASTM D5185m | >40     | <b>&lt;1</b> | 0        | <1 |
| Copper   | ppm    | ASTM D5185m | >330    | <b>1</b>     | 2        | 3  |
| Tin      | ppm    | ASTM D5185m | >15     | <b>&lt;1</b> | <1       | <1 |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0  |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0  |

## ADDITIVES

|            | method | limit/base  | current | history1     | history2 |      |
|------------|--------|-------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 3        | 25   |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m |         | <b>56</b>    | 53       | 26   |
| Manganese  | ppm    | ASTM D5185m |         | <b>&lt;1</b> | <1       | <1   |
| Magnesium  | ppm    | ASTM D5185m |         | <b>868</b>   | 836      | 509  |
| Calcium    | ppm    | ASTM D5185m |         | <b>1090</b>  | 1149     | 1509 |
| Phosphorus | ppm    | ASTM D5185m |         | <b>978</b>   | 968      | 673  |
| Zinc       | ppm    | ASTM D5185m |         | <b>1179</b>  | 1194     | 809  |
| Sulfur     | ppm    | ASTM D5185m |         | <b>3313</b>  | 3179     | 2551 |

## CONTAMINANTS

|           | method | limit/base  | current | history1     | history2 |     |
|-----------|--------|-------------|---------|--------------|----------|-----|
| Silicon   | ppm    | ASTM D5185m | >25     | <b>2</b>     | 5        | 5   |
| Sodium    | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 6        | 4   |
| Potassium | ppm    | ASTM D5185m | >20     | <b>3</b>     | 3        | 5   |
| Chlorine  | ppm    | ASTM D5185m |         | <b>---</b>   | ---      | --- |

## INFRA-RED



|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | *ASTM D7844 | >4      | <b>0.3</b>  | 0.3      | 0.4  |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>8.7</b>  | 9.5      | 10.5 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>18.2</b> | 19.3     | 22.8 |

## FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |      |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>15.0</b> | 16.5     | 20.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 10.5    | <b>6.8</b>  | 6.0      | 8.7  |







# OIL ANALYSIS REPORT

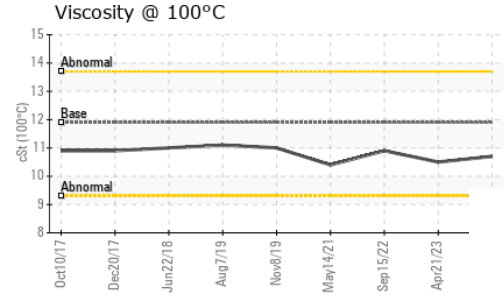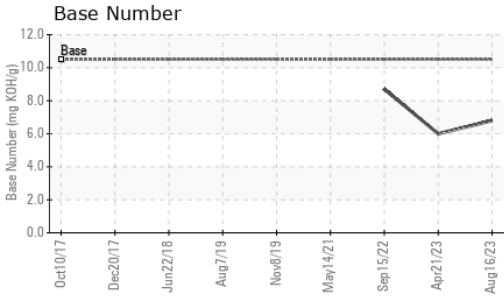

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 11.9    | <b>10.7</b> | 10.5     | 10.9 |

## GRAPHS

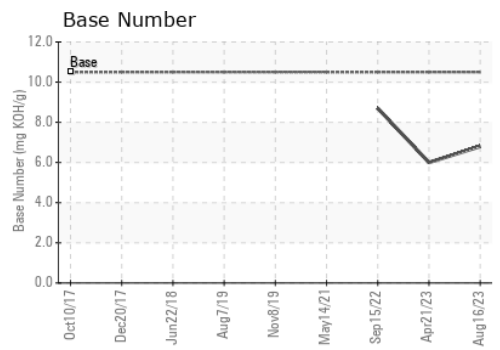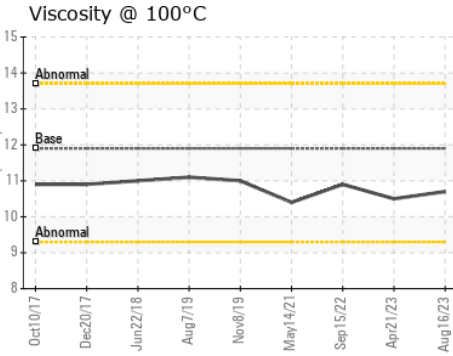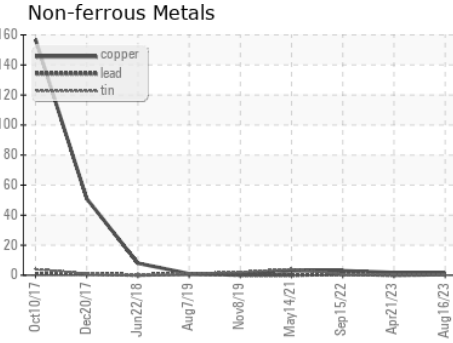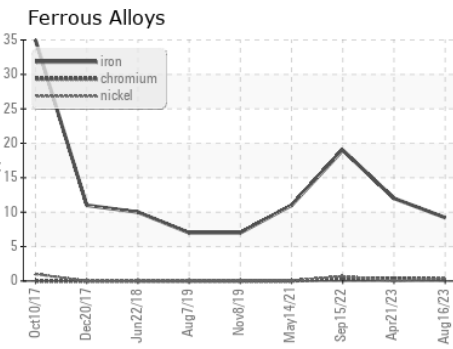

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004671 **Received** : 21 Aug 2023  
**Lab Number** : **05929358** **Diagnosed** : 23 Aug 2023  
**Unique Number** : 10609305 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)