


## **PROBLEM SUMMARY**

# KAESER SFC 30ST 4465873 (S/N 1012)

Compressor

### KAESER SIGMA (OEM) S-460 (--- GAL)

### COMPONENT CONDITION SUMMARY

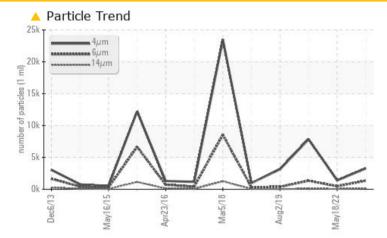

#### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status		ATTENTION	NORMAL	ATTENTION					
Particles >6µm	ASTM D7647 >1300	) 🔺 1338	469	<b>1</b> 332					
Particles >14µm	ASTM D7647 >80	<b>148</b>	51	<b>A</b> 84					
Particles >21µm	ASTM D7647 >20	<b>4</b> 5	12	<u> </u>					
Oil Cleanliness	ISO 4406 (c) >/17	/13 🔺 19/18/14	18/16/13	<u> </u>					


Customer Id: ACCSOM Sample No.: KC101885 Lab Number: 05929587 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

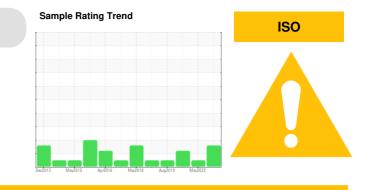

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 18 May 2022 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 22 Jul 2020 Diag: Jonathan Hester



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



## 02 Aug 2019 Diag: Angela Borella

#### NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

# KAESER SFC 30ST 4465873 (S/N 1012)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

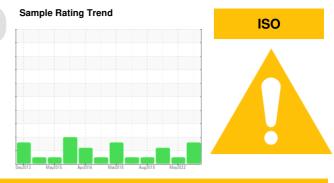

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC101885	KC95993	KC83377
Sample Date		Client Info		10 Aug 2023	18 May 2022	22 Jul 2020
Machine Age	hrs	Client Info		42597	42310	39320
Oil Age	hrs	Client Info		287	2990	3006
Oil Changed		Client Info		Not Changd	Changed	Changed
Sample Status				ATTENTION	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	2	0
Copper	ppm	ASTM D5185m		<1	2	2
Tin	ppm	ASTM D5185m	>10	0	1	0
Antimony	ppm	ASTM D5185m				<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ррш		11 11 11		-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m	90	12	<1	2
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	71	61	50
Calcium	ppm	ASTM D5185m	2	0	<1	<1
Phosphorus	ppm	ASTM D5185m		2	9	5
Zinc	ppm	ASTM D5185m		0	14	8
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	2
Sodium	ppm	ASTM D5185m		21	38	25
Potassium	ppm	ASTM D5185m	>20	2	1	3
Water	%	ASTM D6304	>0.05	0.024	0.031	0.027
ppm Water	ppm	ASTM D6304	>500	249.3	318.8	277.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3272	1384	7838
Particles >6µm		ASTM D7647	>1300	<u> </u>	469	▲ 1332
Particles >14µm		ASTM D7647	>80	<u> </u>	51	<b>A</b> 84
Particles >21µm		ASTM D7647	>20	<u> </u>	12	<u> </u>
Particles >38µm		ASTM D7647	>4	3	1	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	▲ 19/18/14	18/16/13	▲ 18/14
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.30	0.293
			5		0.00	0.200



Acid Number

0.50

(B)(14) HOX

# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

method

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

\*Visua

\*Visual

\*Visual

scalar \*Visual

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.05

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

history1

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

history2

NONE

NONE

NONE

NONE

LIGHT


NONE

NORML

NORML


NEG

NEG

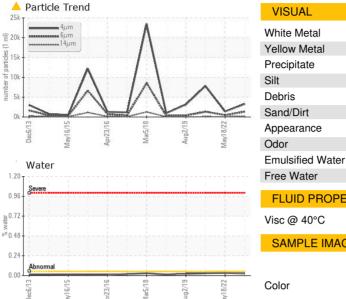



Bottom

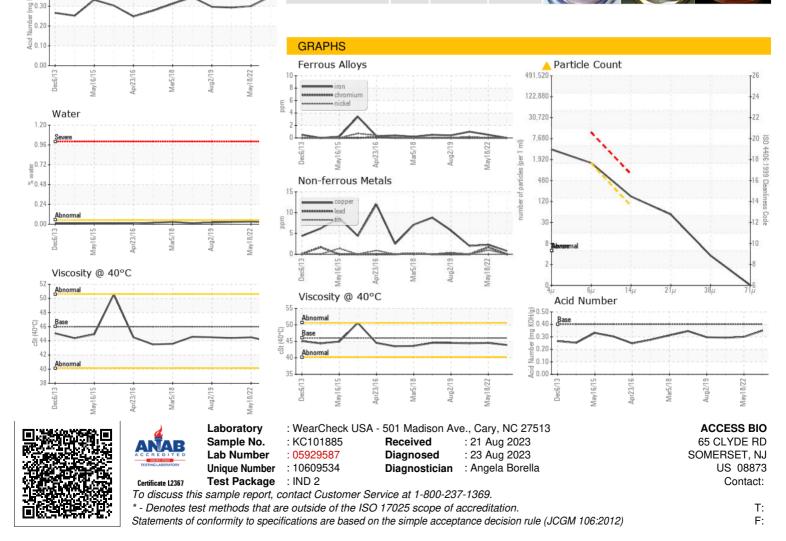

Contact/Location: ? ? - ACCSOM