


# PROBLEM SUMMARY

Sample Rating Trend




ISO

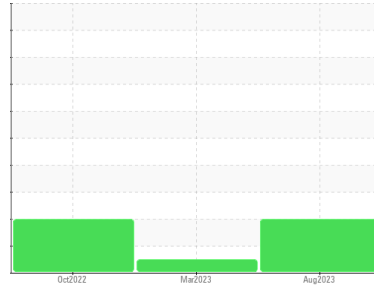

Machine Id  
**KAESER 8406163 (S/N 1166)**  
Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

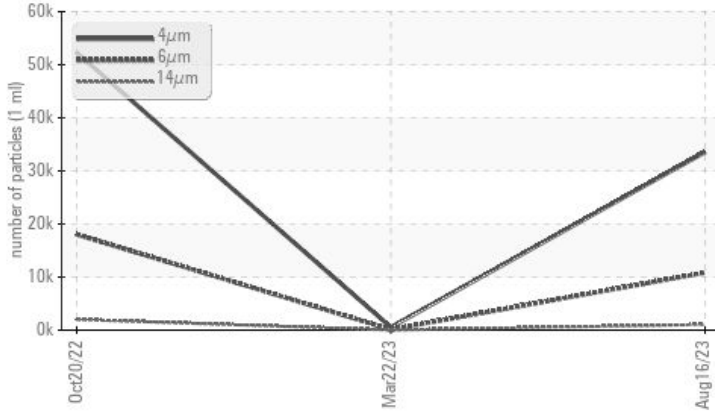

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	ABNORMAL
Particles >6µm	ASTM D7647	>1300	▲ <b>10820</b>	111	▲ 18038
Particles >14µm	ASTM D7647	>80	▲ <b>1058</b>	12	▲ 2024
Particles >21µm	ASTM D7647	>20	▲ <b>302</b>	4	▲ 482
Particles >38µm	ASTM D7647	>4	▲ <b>7</b>	0	▲ 7
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ <b>22/21/17</b>	16/14/11	▲ 23/21/18

Customer Id: WABWABKC  
Sample No.: KC05929596  
Lab Number: 05929596  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS

### 22 Mar 2023 Diag: Angela Borella

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 20 Oct 2022 Diag: Doug Bogart

ISO




We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

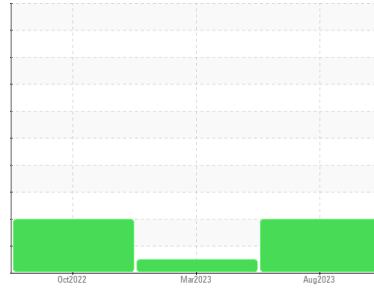

ISO



Machine Id  
**KAESER 8406163 (S/N 1166)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

**DIAGNOSIS**

▲ **Recommendation**

We recommend you service the filters on this component. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

▲ **Contamination**

There is a high amount of particulates present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC05929596</b>	KC100526	KC104207
Sample Date	Client Info			<b>16 Aug 2023</b>	22 Mar 2023	20 Oct 2022
Machine Age	hrs	Client Info		<b>9014</b>	6165	3207
Oil Age	hrs	Client Info		<b>8186</b>	4206	1248
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	Not Chngd
Sample Status				<b>ABNORMAL</b>	NORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>13</b>	3	7
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>2</b>	<1	44
Calcium	ppm	ASTM D5185m	2	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m		<b>&lt;1</b>	43	0
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	3	3
Sodium	ppm	ASTM D5185m		<b>1</b>	<1	17
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	8
Water	%	ASTM D6304	>0.05	<b>0.006</b>	0.004	0.016
ppm Water	ppm	ASTM D6304	>500	<b>62.1</b>	45.3	160.0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>33553</b>	540	52286
Particles >6µm		ASTM D7647	>1300	▲ <b>10820</b>	111	▲ 18038
Particles >14µm		ASTM D7647	>80	▲ <b>1058</b>	12	▲ 2024
Particles >21µm		ASTM D7647	>20	▲ <b>302</b>	4	▲ 482
Particles >38µm		ASTM D7647	>4	▲ <b>7</b>	0	▲ 7
Particles >71µm		ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>22/21/17</b>	16/14/11	▲ 23/21/18

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.45</b>	0.49	0.42

# OIL ANALYSIS REPORT

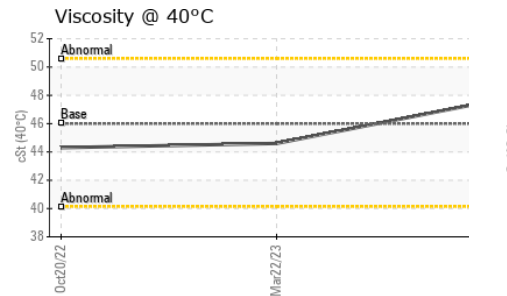
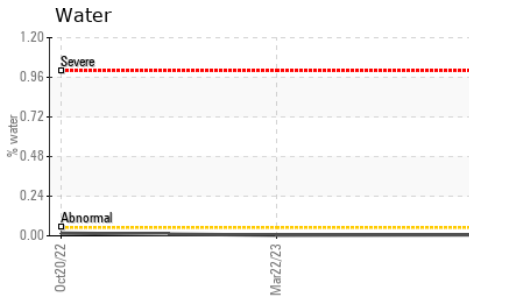
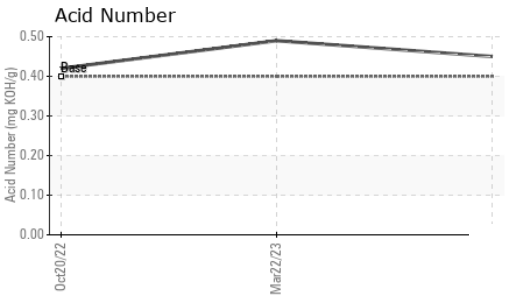
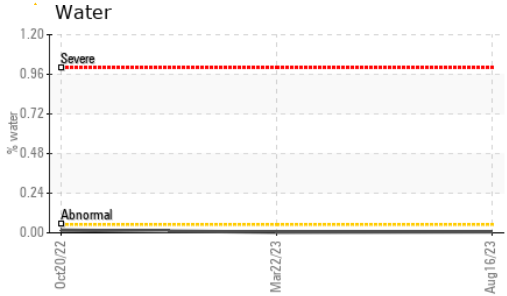
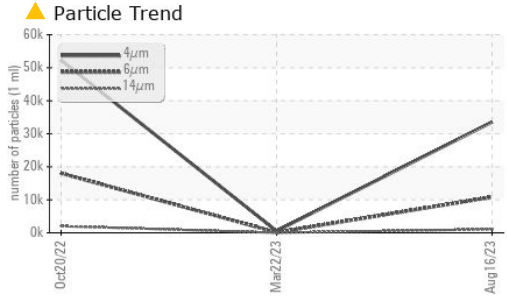


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	<b>47.6</b>	44.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

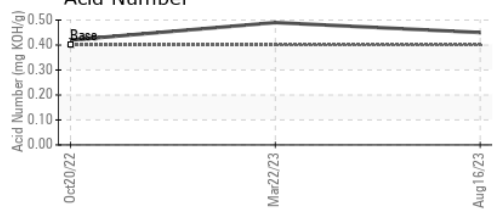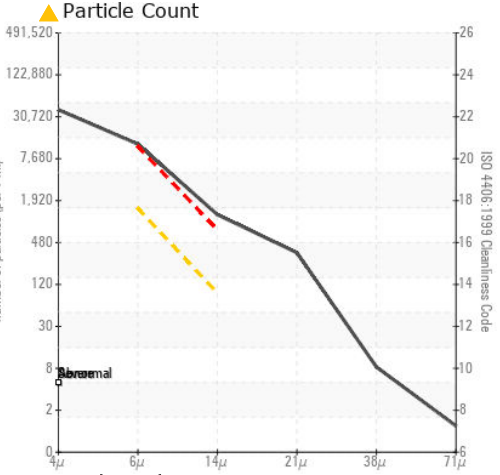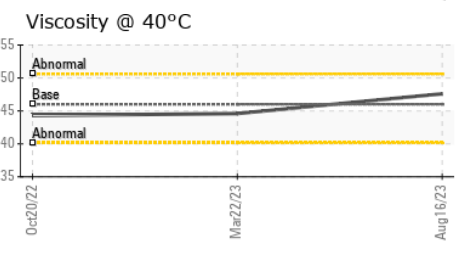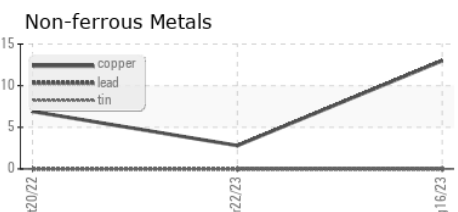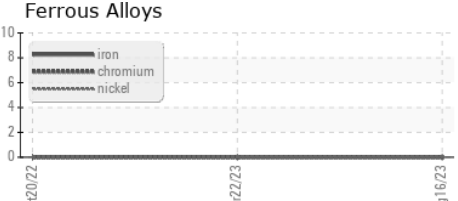

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC05929596 **Received** : 21 Aug 2023  
**Lab Number** : 05929596 **Diagnosed** : 22 Aug 2023  
**Unique Number** : 10609543 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**WABASH CASTING LLC**  
 3537 W MILL ST  
 WABASH, IN  
 US 46992  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)