

### **OIL ANALYSIS REPORT**

# Sample Rating Trend



NORMAL

# KAESER AIRCENTER SM 7.5 3772983 (S/N 1078)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC121815	KC95041	KC92827
Sample Date		Client Info		11 Aug 2023	06 Dec 2021	08 Jun 2021
Machine Age	hrs	Client Info		0	54290	54288
Oil Age	hrs	Client Info		9647	4	47
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	<1
Tin	ppm		>10	0	0	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	8
Barium	ppm	ASTM D5185m	90	61	51	57
Molybdenum	ppm	ASTM D5185m	00	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	84	84	90
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m	-	9	4	3
Zinc	ppm	ASTM D5185m		0	0	<1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m	>25	0	<1	<1
Sodium	ppm ppm	ASTM D5185m	>20	4	4	9
Potassium		ASTM D5185m	>20	4 <1	4 <1	<1
Water	ppm %	ASTM D5185III	>0.05	0.035	0.035	0.030
		ASTM D6304 ASTM D6304	>500	352.0	352.2	
ppm Water	ppm					303.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	1005	1999	3973	4066
Particles >6µm		ASTM D7647	>1300	396	▲ 1423	1164
Particles >14µm		ASTM D7647	>80	28	▲ 233	▲ 126
Particles >21µm		ASTM D7647	>20	8	▲ 57	<u>▲</u> 36
Particles >38µm		ASTM D7647	>4	0	4	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	<b>1</b> 8/15	▲ 17/14
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.39	0.364	0.362


Contact/Location: Service Manager - 2XLSPR




## **OIL ANALYSIS REPORT**

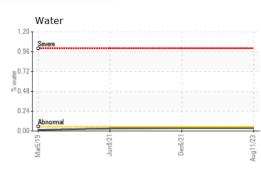

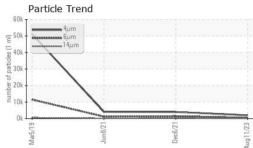

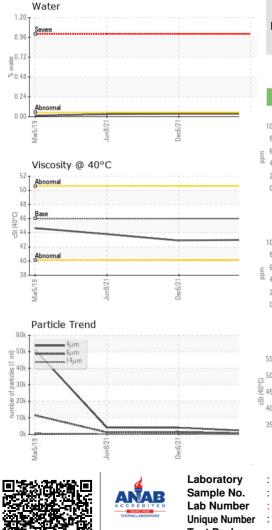

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.0	42.9	43.8
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						
Bottom				$\bigcirc$		

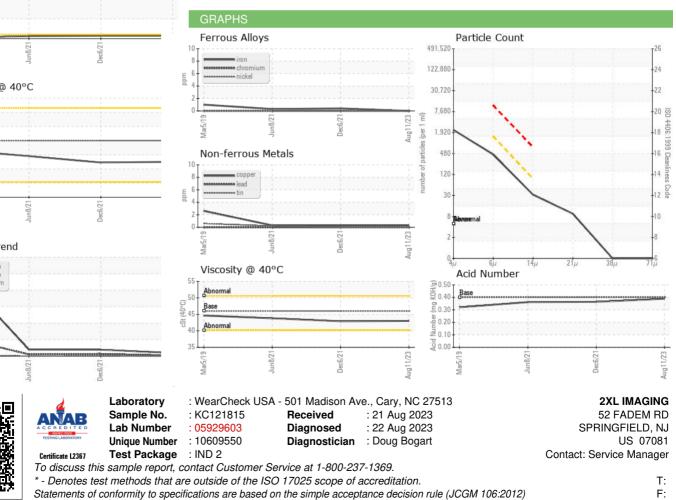

Contact/Location: Service Manager - 2XLSPR