

No relevant graphs to display

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL	
Debris	scalar	*Visual	NONE	🔺 MODER	LIGHT	NONE	

Customer Id: PERPERUSP Sample No.: USP245923 Lab Number: 05929613 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED	RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description			
Change Filter			?	We recommend you service the filters on this component.			
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.			

HISTORICAL DIAGNOSIS



09 Apr 2023 Diag: Doug Bogart

We recommend you service the filters on this component. Resample at the next service interval to monitor. An increase in the iron level is noted. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

30 Aug 2022 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

24 May 2022 Diag: Doug Bogart





Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Report Id: PERPERUSP [WUSCAR] 05929613 (Generated: 08/23/2023 17:00:14) Rev: 1



OIL ANALYSIS REPORT

Area ENGINE ROOM Machine Id MYCOM C06-1 (S/N 2515369) Component

Refrigeration Compressor

FRICK COMPRESSOR OIL #3 (--- PNT)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

There is a trace of moisture present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		ug2014 Jun2	016 Jun2017 Oct2017	Jun2019 Mar2020 Dec2020 Aug	2022 Jul202:	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP245923	USP218707	USP241504
Sample Date		Client Info		09 Jul 2023	09 Apr 2023	30 Aug 2022
Machine Age	hrs	Client Info		0	53145	48012
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	48	40	25
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	<1
Copper	ppm	ASTM D5185m	>8	<1	<1	<1
Tin	ppm	ASTM D5185m	>4	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		8	0	<1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		21	18	33
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	<1
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water	%	ASTM D6304	>0.01	0.017	0.003	0.003
ppm Water	ppm	ASTM D6304	>100	175.9	33.8	32.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000		▲ 76804	▲ 30873
Particles >6µm		ASTM D7647	>2500		<u> </u>	<mark>▲</mark> 6256
Particles >14µm		ASTM D7647	>320		4 42	188
Particles >21µm		ASTM D7647	>80		55	13
Particles >38µm		ASTM D7647	>20		1	0
Particles >71µm		ASTM D7647	>4		0	0
Oil Cleanliness		ISO 4406 (c)	>21/18/15		▲ 23/21/16	▲ 22/20/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.03	0.03	0.015


Sample Rating Trend


VIS DEBRIS



OIL ANALYSIS REPORT

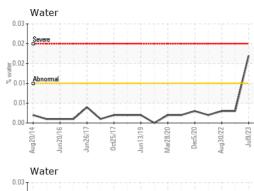

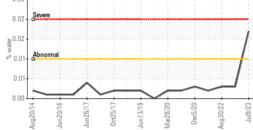

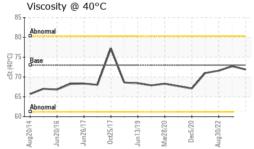


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	A MODER	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	73	71.9	72.7	71.6
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
						183 16-1 17994 77

Color



Bottom

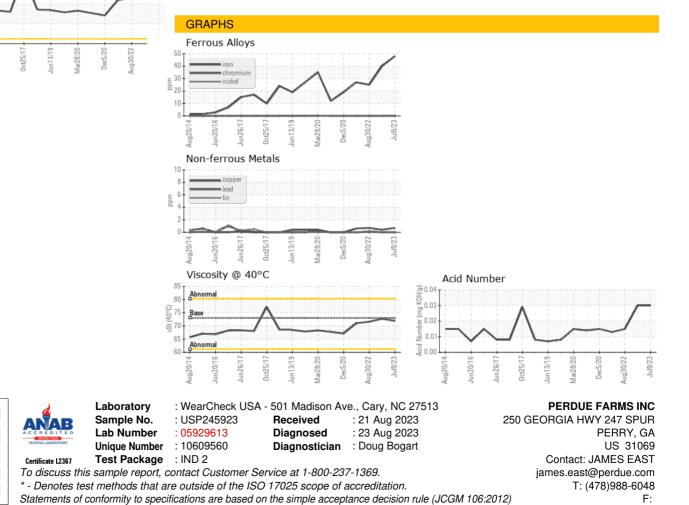

Ř

Contact/Location: JAMES EAST - PERPERUSP