


# **OIL ANALYSIS REPORT**

## Sample Rating Trend



**NORMAL** 



# HSC-7 (S/N Z0706)

**Refrigeration Compressor** 

USPI 1009-68 SC (--- GAL)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                 |        | Feb 2021     | Jan2022    | Jul2022 Mar2023 | Aug2023     |                   |
|-----------------|--------|--------------|------------|-----------------|-------------|-------------------|
| SAMPLE INFORM   | MATION | method       | limit/base | current         | history1    | history2          |
| Sample Number   |        | Client Info  |            | USP250330       | USP246835   | USP241185         |
| Sample Date     |        | Client Info  |            | 14 Aug 2023     | 06 Mar 2023 | 22 Jul 2022       |
| Machine Age     | hrs    | Client Info  |            | 21130           | 0           | 21117             |
| Oil Age         | hrs    | Client Info  |            | 10227           | 5341        | 5911              |
| Oil Changed     |        | Client Info  |            | N/A             | N/A         | Not Changd        |
| Sample Status   |        |              |            | NORMAL          | NORMAL      | ABNORMAL          |
| WEAR METALS     |        | method       | limit/base | current         | history1    | history2          |
| Iron            | ppm    | ASTM D5185m  | >8         | <1              | <1          | 7                 |
| Chromium        | ppm    | ASTM D5185m  | >2         | 0               | 0           | 0                 |
| Nickel          | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Titanium        | ppm    | ASTM D5185m  |            | <1              | 0           | 0                 |
| Silver          | ppm    | ASTM D5185m  | >2         | 0               | 0           | 0                 |
| Aluminum        | ppm    | ASTM D5185m  | >3         | 0               | <1          | <1                |
| Lead            | ppm    | ASTM D5185m  | >2         | 0               | 0           | <1                |
| Copper          | ppm    | ASTM D5185m  | >8         | 0               | 0           | <1                |
| Tin             | ppm    | ASTM D5185m  | >4         | 0               | 0           | 0                 |
| Antimony        | ppm    | ASTM D5185m  |            |                 |             |                   |
| Vanadium        | ppm    | ASTM D5185m  |            | <1              | <1          | 0                 |
| Cadmium         | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| ADDITIVES       |        | method       | limit/base | current         | history1    | history2          |
| Boron           | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Barium          | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Molybdenum      | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Manganese       | ppm    | ASTM D5185m  |            | 0               | <1          | 0                 |
| Magnesium       | ppm    | ASTM D5185m  |            | 0               | 0           | <1                |
| Calcium         | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Phosphorus      | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Zinc            | ppm    | ASTM D5185m  |            | 0               | 0           | 0                 |
| Sulfur          | ppm    | ASTM D5185m  | 50         | 90              | 0           | 136               |
| CONTAMINANTS    |        | method       | limit/base | current         | history1    | history2          |
| Silicon         | ppm    | ASTM D5185m  | >15        | <1              | 2           | 3                 |
| Sodium          | ppm    | ASTM D5185m  |            | <1              | 0           | 0                 |
| Potassium       | ppm    | ASTM D5185m  | >20        | 0               | 0           | <1                |
| Water           | %      | ASTM D6304   | >0.01      | 0.006           | 0.003       | 0.008             |
| ppm Water       | ppm    | ASTM D6304   | >100       | 64.7            | 27.5        | 86.0              |
| FLUID CLEANLIN  | IESS   | method       | limit/base | current         | history1    | history2          |
| Particles >4μm  |        | ASTM D7647   | >10000     | 1339            | 4655        | ▲ 50290           |
| Particles >6µm  |        | ASTM D7647   | >2500      | 315             | 1387        | ▲ 9941            |
| Particles >14μm |        | ASTM D7647   | >640       | 27              | 57          | 173               |
| Particles >21μm |        | ASTM D7647   | >160       | 8               | 9           | 24                |
| Particles >38μm |        | ASTM D7647   | >40        | 0               | 1           | 0                 |
| Particles >71μm |        | ASTM D7647   | >10        | 0               | 0           | 0                 |
| Oil Cleanliness |        | ISO 4406 (c) | >20/18/16  | 18/15/12        | 19/18/13    | <u>△</u> 23/20/15 |
| FLUID DEGRADA   | TION   | method       | limit/base | current         | history1    | history2          |
|                 |        |              |            |                 |             |                   |



## **OIL ANALYSIS REPORT**

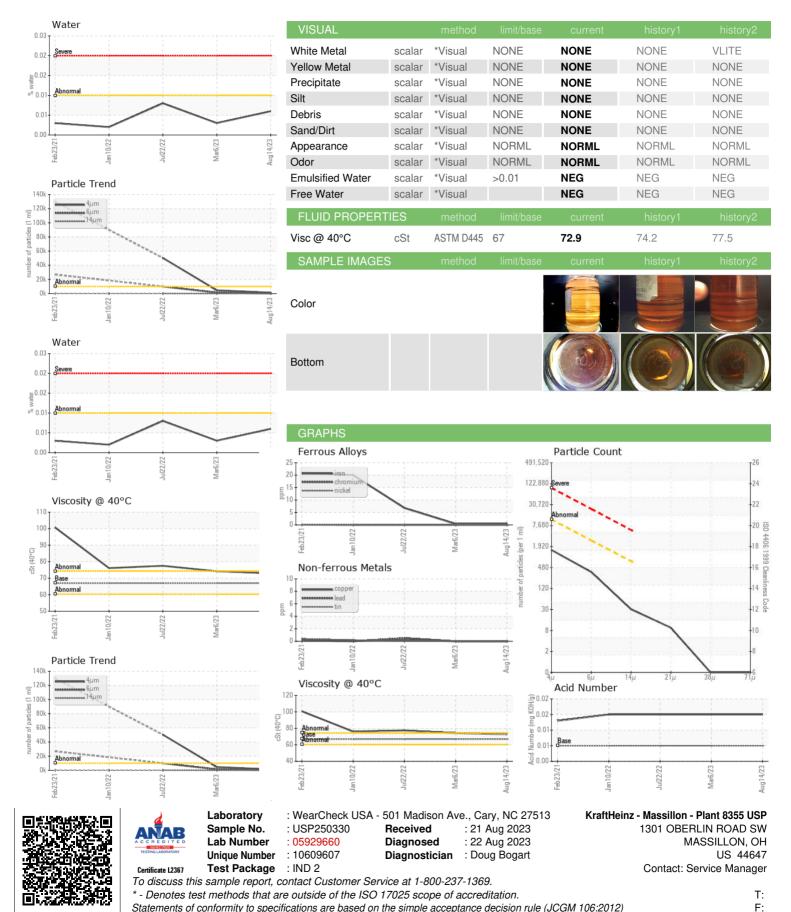

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)