

## **OIL ANALYSIS REPORT**

Sample Rating Trend



#### Area DRYERS Machine Id C-601 Component Gearbox Fluid MOBIL SHC 630 (8 LTR)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	epźozo Aprźozi occżo limit/base		history1	history2	
Sample Number		Client Info		WC0849095	WC0788675	WC0739596	
Sample Date		Client Info		17 Aug 2023	14 Feb 2023	14 Sep 2022	
Machine Age	yrs	Client Info		9	9	0	
Oil Age	yrs	Client Info		4	3	3	
Oil Changed	<i>J</i>	Client Info		N/A	Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	0	17	16	
Chromium	ppm	ASTM D5185m	>15	0	0	0	
Nickel	ppm	ASTM D5185m	>15	<1	0	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m		0	0	<1	
Aluminum	ppm	ASTM D5185m	>25	0	0	0	
Lead	ppm	ASTM D5185m	>100	0	0	0	
Copper	ppm	ASTM D5185m	>200	0	0	0	
Tin	ppm		>25	0	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	<1	
Magnesium	ppm	ASTM D5185m		<1	0	0	
Calcium	ppm	ASTM D5185m		0	<1	0	
Phosphorus	ppm	ASTM D5185m		408	453	435	
Zinc	ppm	ASTM D5185m		0	0	<1	
Sulfur	ppm	ASTM D5185m		4	0	68	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	10	21	23	
Sodium	ppm	ASTM D5185m		0	<1	0	
Potassium	ppm	ASTM D5185m	>20	<1	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>20000	1526			
Particles >6µm		ASTM D7647	>5000	380			
Particles >14µm		ASTM D7647	>640	21			
Particles >21µm		ASTM D7647	>160	6			
Particles >38µm		ASTM D7647	>40	0			
Particles >71µm		ASTM D7647	>10	0			
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/16/12			
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		0.26	0.35	0.42	




# **OIL ANALYSIS REPORT**

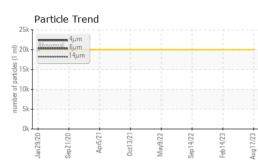

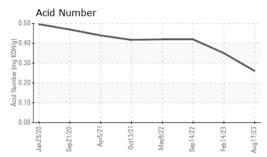

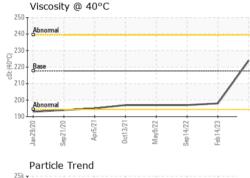





ĕ

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	217.7	224	198	197
SAMPLE IMAGES		method	limit/base	current	history1	history2
						The second

Color



Bottom

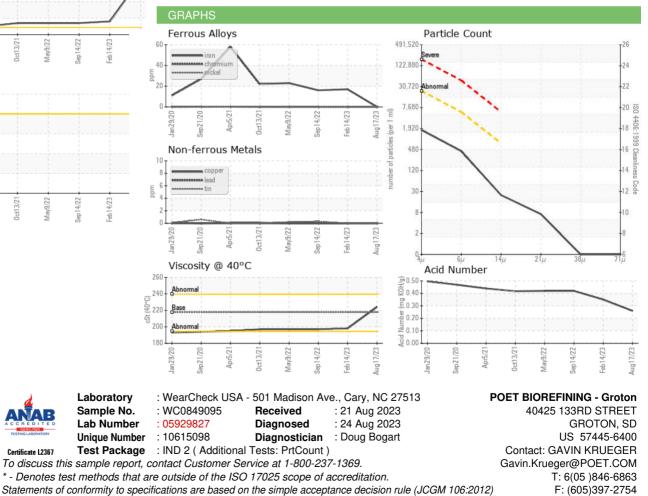

Submitted By: GAVIN KRUEGER

Page 2 of 2