




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

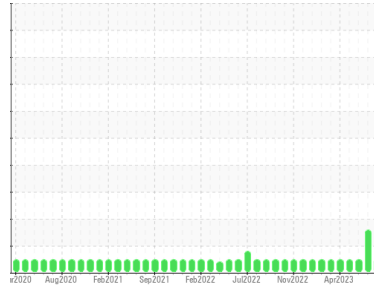

Area
FINISHING
Machine Id
TandG Strapper Hydraulic Unit (S/N SA605H10U)
Component
Hydraulic System
Fluid
VALVOLINE AW HYDRAULIC 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0782945	WC0782976	WC0782959
Sample Date	Client Info	17 Aug 2023	10 Jul 2023	15 Jun 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ATTENTION	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	<1
Chromium	ppm	ASTM D5185m >20	<1	0
Nickel	ppm	ASTM D5185m >20	0	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	0	0
Aluminum	ppm	ASTM D5185m >20	0	0
Lead	ppm	ASTM D5185m >20	0	<1
Copper	ppm	ASTM D5185m >20	4	4
Tin	ppm	ASTM D5185m >20	0	0
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2.6	0	1
Barium	ppm	ASTM D5185m 0	0	0
Molybdenum	ppm	ASTM D5185m 0	2	1
Manganese	ppm	ASTM D5185m	0	0
Magnesium	ppm	ASTM D5185m 1.9	7	8
Calcium	ppm	ASTM D5185m 81	117	117
Phosphorus	ppm	ASTM D5185m 350	366	375
Zinc	ppm	ASTM D5185m 445	482	472
Sulfur	ppm	ASTM D5185m 1850	1201	1440

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	0
Sodium	ppm	ASTM D5185m	14	11
Potassium	ppm	ASTM D5185m >20	<1	<1





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >2500	799	2328	387
Particles >6µm	ASTM D7647 >640	250	▲ 883	59
Particles >14µm	ASTM D7647 >80	21	▲ 95	3
Particles >21µm	ASTM D7647 >20	5	▲ 29	1
Particles >38µm	ASTM D7647 >4	1	1	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >18/16/13	17/15/12	▲ 18/17/14	16/13/9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.40	0.41

OIL ANALYSIS REPORT


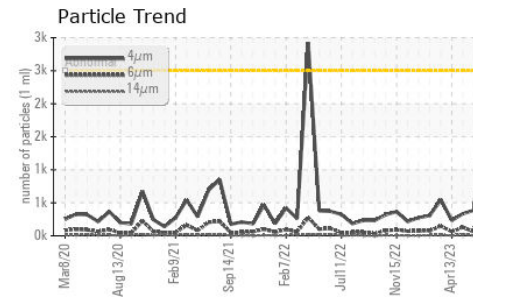
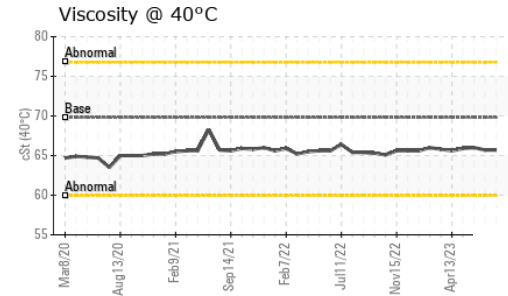
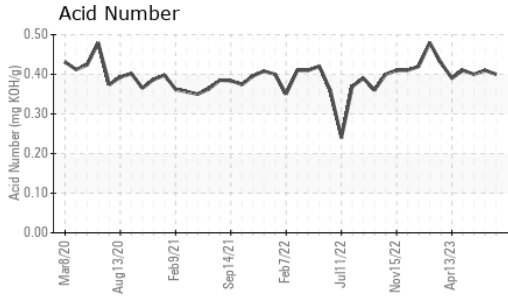
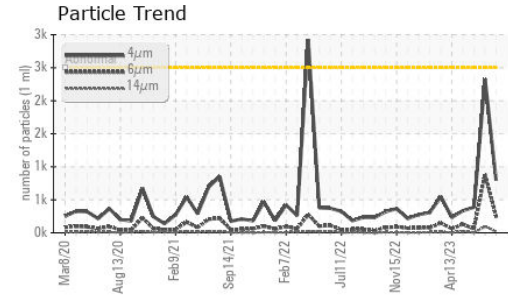


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69.8	65.7	66.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

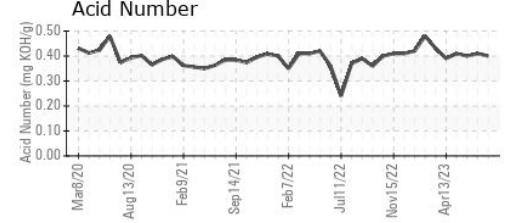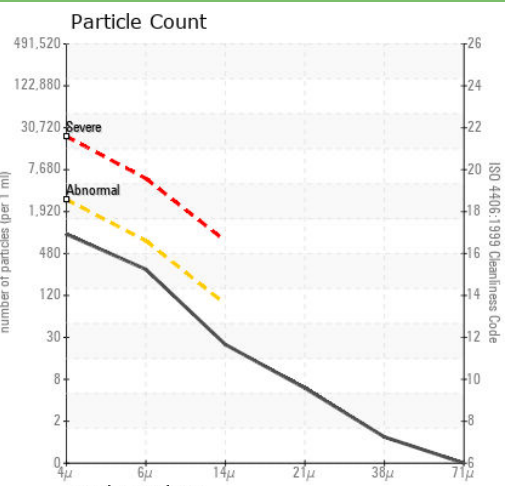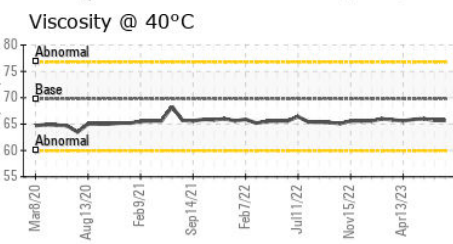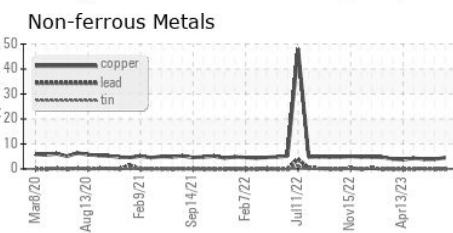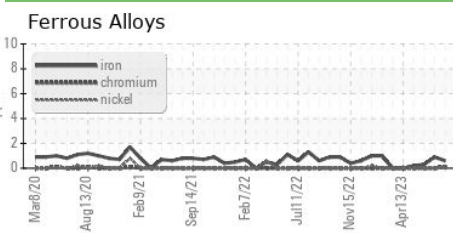

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0782945 **Received** : 21 Aug 2023
Lab Number : 05930305 **Diagnosed** : 22 Aug 2023
Unique Number : 10615576 **Diagnostician** : Wes Davis
Test Package : IND 2

J.M. Huber Corporation
 PO BOX 38
 CRYSTAL HILL, VA
 US 24539
 Contact: Ted Hudson
 ted.hudson@huber.com
 T: (434)476-6628
 F: (434)476-8133

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)