




OIL ANALYSIS REPORT

Sample Rating Trend

VISUAL METAL

Area
TSI
 Machine Id
TSI 12861
 Component
Rear Differential
 Fluid
GEAR OIL SAE 80 (--- GAL)

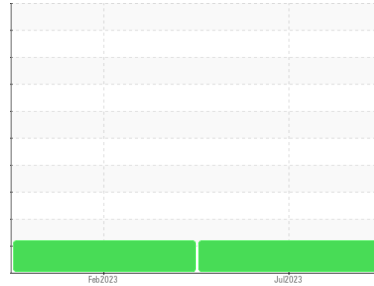

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843152	WC0771162	---
Sample Date	Client Info		19 Jul 2023	08 Feb 2023	---
Machine Age	mls	Client Info	80506	0	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	79	19	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	<1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	400	245	282	---
Barium	ppm	ASTM D5185m	200	0	4	---
Molybdenum	ppm	ASTM D5185m	12	<1	0	---
Manganese	ppm	ASTM D5185m		9	10	---
Magnesium	ppm	ASTM D5185m	12	0	<1	---
Calcium	ppm	ASTM D5185m	150	4	6	---
Phosphorus	ppm	ASTM D5185m	1650	1618	1374	---
Zinc	ppm	ASTM D5185m	125	8	9	---
Sulfur	ppm	ASTM D5185m	22500	29161	28160	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	11	16	---
Sodium	ppm	ASTM D5185m		6	5	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water	%	ASTM D6304	>.2	0.070	0.032	---
ppm Water	ppm	ASTM D6304	>2000	701.3	320.7	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	---	▲ 105846	---
Particles >6µm	ASTM D7647	>5000	---	▲ 19154	---
Particles >14µm	ASTM D7647	>640	---	106	---
Particles >21µm	ASTM D7647	>160	---	12	---
Particles >38µm	ASTM D7647	>40	---	0	---
Particles >71µm	ASTM D7647	>10	---	0	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	---	▲ 24/21/14	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	2.45	2.52	---



OIL ANALYSIS REPORT

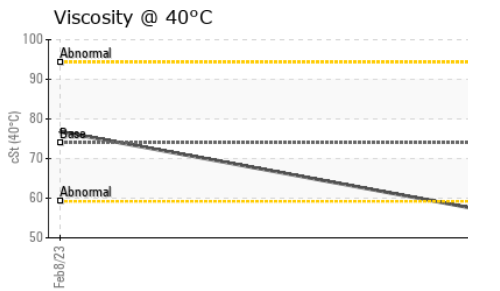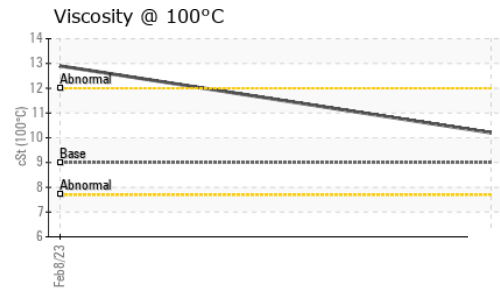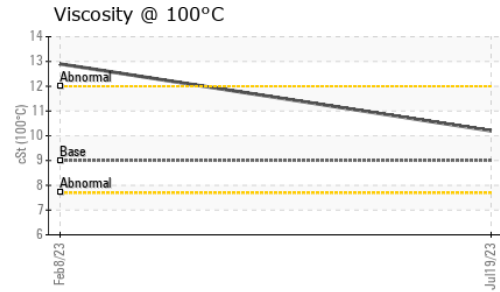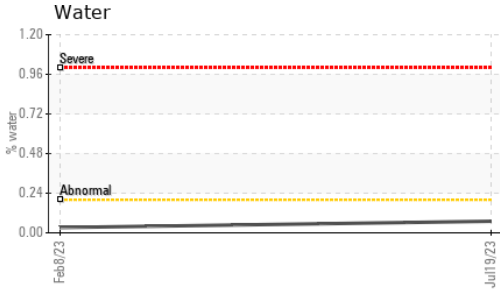

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	74	56.6	76.8
Visc @ 100°C	cSt	ASTM D445	9.0	10.2	12.9
Viscosity Index (VI)	Scale	ASTM D2270	94	170	169





SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

no image

no image

GRAPHS

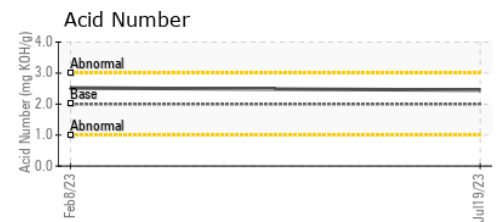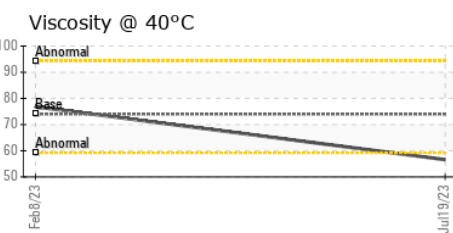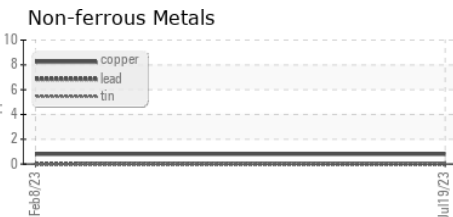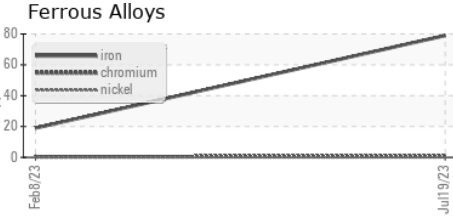

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843152 **Received** : 21 Aug 2023
Lab Number : 05930331 **Diagnosed** : 23 Aug 2023
Unique Number : 10615602 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: