




OIL ANALYSIS REPORT

Sample Rating Trend

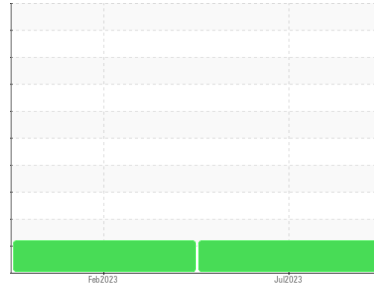

ISO



Area
TSI
 Machine Id
TSI 12860
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843151	WC0771159	---
Sample Date	Client Info		20 Jul 2023	08 Feb 2023	---
Machine Age	mls	Client Info	71320	0	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	78	12	---
Chromium	ppm	ASTM D5185m >10	<1	<1	---
Nickel	ppm	ASTM D5185m >10	0	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >25	0	0	---
Lead	ppm	ASTM D5185m >25	0	<1	---
Copper	ppm	ASTM D5185m >100	<1	<1	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	289	285	---
Barium	ppm	ASTM D5185m 200	0	5	---
Molybdenum	ppm	ASTM D5185m 12	0	0	---
Manganese	ppm	ASTM D5185m	4	4	---
Magnesium	ppm	ASTM D5185m 12	0	<1	---
Calcium	ppm	ASTM D5185m 150	<1	6	---
Phosphorus	ppm	ASTM D5185m 1650	1597	1372	---
Zinc	ppm	ASTM D5185m 125	3	9	---
Sulfur	ppm	ASTM D5185m 22500	29271	28132	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	13	14	---
Sodium	ppm	ASTM D5185m	5	5	---
Potassium	ppm	ASTM D5185m >20	<1	<1	---
Water	%	ASTM D6304 >.2	0.052	0.025	---
ppm Water	ppm	ASTM D6304 >2000	527.4	251.2	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 113056	▲ 89335	---
Particles >6µm	ASTM D7647	>5000	▲ 26666	▲ 14014	---
Particles >14µm	ASTM D7647	>640	208	87	---
Particles >21µm	ASTM D7647	>160	41	9	---
Particles >38µm	ASTM D7647	>40	3	0	---
Particles >71µm	ASTM D7647	>10	0	0	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/15	▲ 24/21/14	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.52	2.52	---


OIL ANALYSIS REPORT

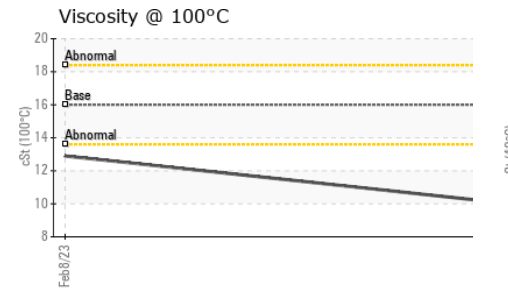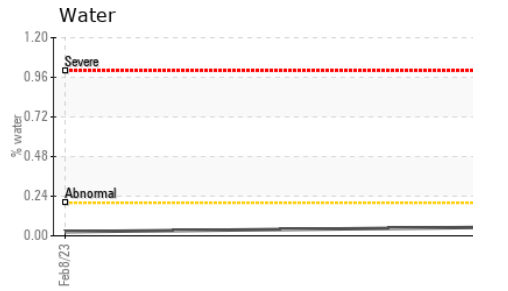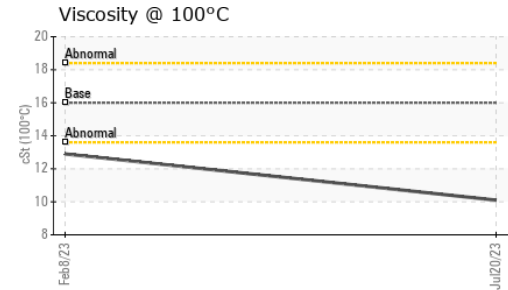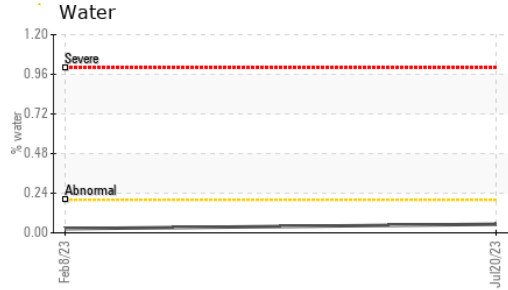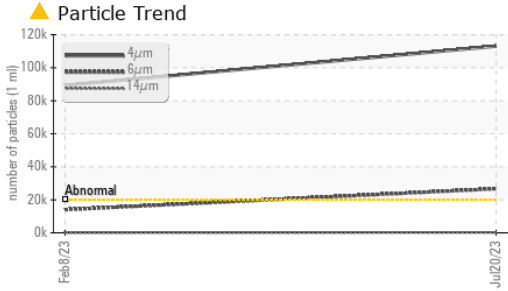




VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	109	55.5	77.3	---
Visc @ 100°C	cSt	ASTM D445	16.0	10.1	12.9	---
Viscosity Index (VI)	Scale	ASTM D2270	157	171	168	---

SAMPLE IMAGES

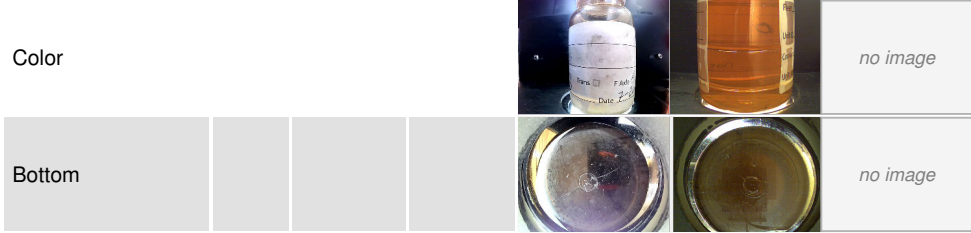

GRAPHS

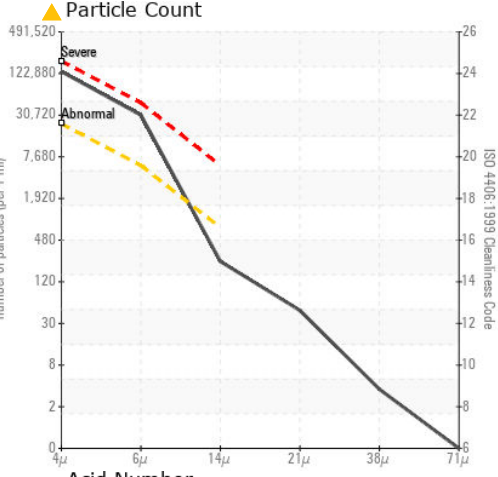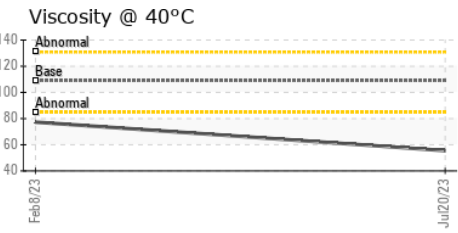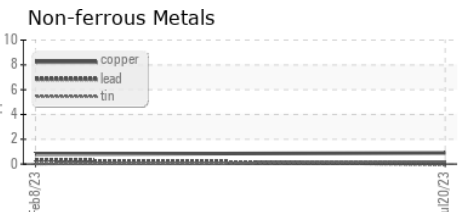

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843151 **Received** : 21 Aug 2023
Lab Number : 05930332 **Diagnosed** : 23 Aug 2023
Unique Number : 10615603 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)