

PROBLEM SUMMARY


Built for a lifetime."

Machine Id KAESER ASD 30 7156368 (S/N 1011) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

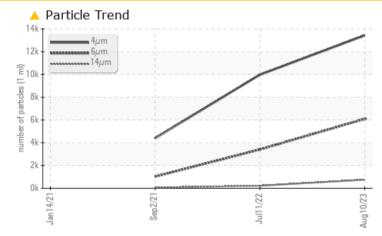

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ABNORMAL	ABNORMAL	NORMAL			
Particles >6µm	ASTM D7647	>1300	<u> </u>	4 3407	1020			
Particles >14µm	ASTM D7647	>80	A 750	<u> </u>	63			
Particles >21µm	ASTM D7647	>20	🔺 162	27	15			
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 21/20/17	🔺 20/19/15	17/13			


Customer Id: STAGIB Sample No.: KCPA005204 Lab Number: 05930372 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 ihester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

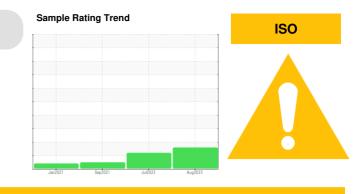

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



11 Jul 2022 Diag: Angela Borella

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



view report

view report

02 Sep 2021 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

14 Jan 2021 Diag: Jonathan Hester





We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Machine Id KAESER ASD 30 7156368 (S/N 1011) Component

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

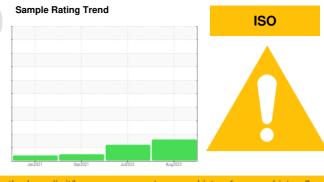

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005204	KCP40383	KCP42425
Sample Date		Client Info		10 Aug 2023	11 Jul 2022	02 Sep 2021
Machine Age	hrs	Client Info		12421	8925	5161
Oil Age	hrs	Client Info		8432	3764	3437
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	1	<1
Lead	ppm	ASTM D5185m	>10	0	<1	0
	ppm	ASTM D5185m		8	7	20
Tin	ppm	ASTM D5185m		0	0	<1
	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m		0	0	0
	PP			-		-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	13
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
-	ppm	ASTM D5185m		<1	<1	<1
-	ppm	ASTM D5185m	90	6	3	11
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	2
Zinc	ppm	ASTM D5185m		24	40	39
Sulfur	ppm	ASTM D5185m		22182	20830	16586
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		7	0	3
Potassium	ppm	ASTM D5185m	>20	2	1	<1
Water	%	ASTM D6304	>0.05	0.009	0.016	0.012
ppm Water	ppm	ASTM D6304	>500	98.7	166.6	126.0
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		13424	9983	4399
Particles >6µm		ASTM D7647	>1300	<u> </u>	4 3407	1020
Particles >14µm		ASTM D7647	>80	<u> </u>	<u> </u>	63
Particles >21µm		ASTM D7647	>20	🔺 162	27	15
Particles >38µm		ASTM D7647	>4	4	2	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 21/20/17	a 20/19/15	17/13
FLUID DEGRADA	ΓΙΟΝ	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.43 0.46 0.445

Report Id: STAGIB [WUSCAR] 05930372 (Generated: 08/23/2023 17:34:01) Rev: 1

Contact/Location: SERVICE MANAGER - STAGIB



her

Pio 0.1

0.00

1.20

0.9

ᇣ0.72

2²0.48

0.24

0.00

52

5

48 (C) (40°C) 41 41

43


3


Abnorm 4(


E


Water

OIL ANALYSIS REPORT

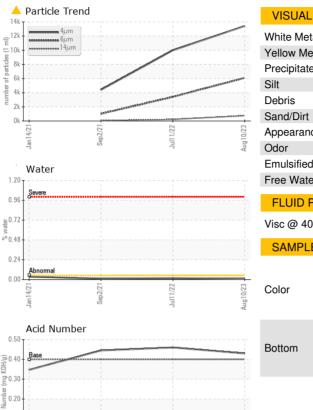

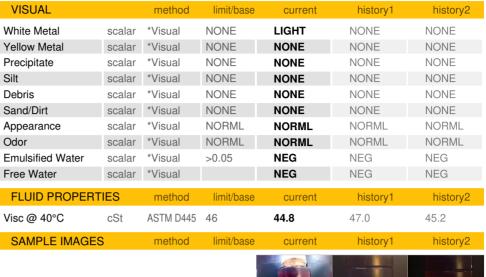



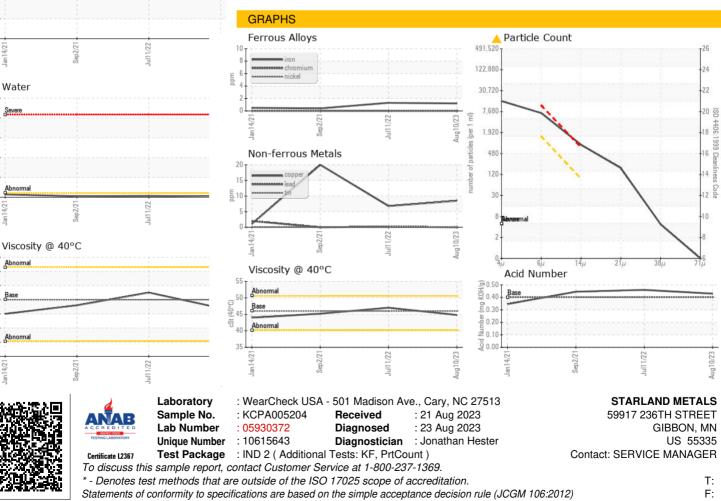

Contact/Location: SERVICE MANAGER - STAGIB