


### **PROBLEM SUMMARY**

## KAESER AS 25T 7005324 (S/N 1371)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

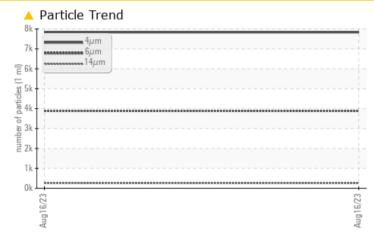

#### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	 
Particles >6µm	ASTM D7647	>1300	<u> </u>	 
Particles >14µm	ASTM D7647	>80	🔺 252	 
Particles >21µm	ASTM D7647	>20	<u> </u>	 
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>A</b> 20/19/15	 


Customer Id: CASDAY Sample No.: KC05930379 Lab Number: 05930379 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

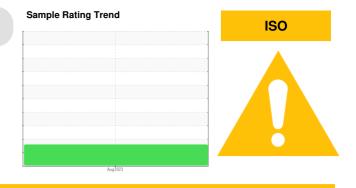

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**



ISO

# KAESER AS 25T 7005324 (S/N 1371)

Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### A Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC05930379		
Sample Date		Client Info		16 Aug 2023		
Machine Age	hrs	Client Info		1411		
Oil Age	hrs	Client Info		499		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m	- 10	0		
Cadmium	ppm	ASTM D5185m		0		
	ррш			Ū		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	17		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	75		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		0		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		19		
Potassium	ppm	ASTM D5185m	>20	5		
Water	%	ASTM D6304	>0.05	0.028		
ppm Water	ppm	ASTM D6304	>500	281.8		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7834		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	1		
ranicies >30µm		ASTM D7647	>3	0		
•						
Particles >71µm Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 20/19/15		
Particles >71µm			>/17/13 limit/base	20/19/15 current	 history1	 history2



## **OIL ANALYSIS REPORT**

VISUAL

White Metal

Yellow Metal

Precipitate

Silt

Debris

Sand/Dirt

Appearance

Free Water

Visc @ 40°C

Color

**Emulsified Water** 

FLUID PROPERTIES

SAMPLE IMAGES

method

\*Visual

\*Visual

\*Visua

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

method

ASTM D445

method

scalar \*Visual

scalar \*Visual

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

>0.05

46

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

current

current

Particle Count

Acid Number

480

120

30

0.10

0.00

Aug1

NEG

NEG

44.1

history1

history

history1

no image

no image

history2

history2

history2


no image


no imade

4406

:1999 Cle

14

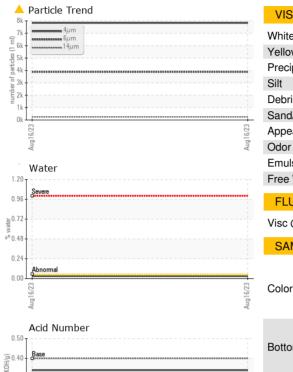

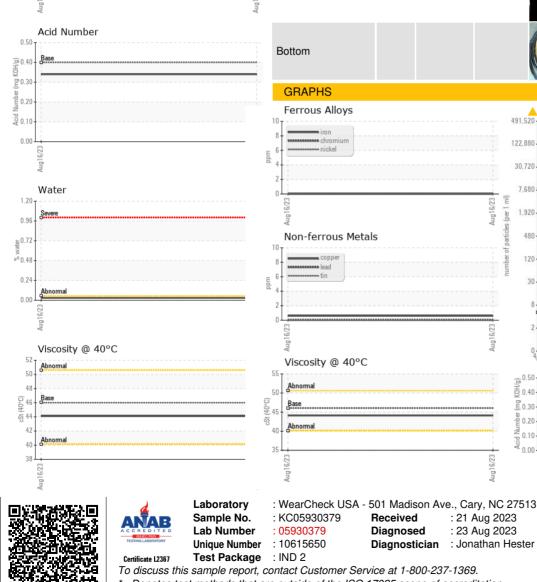

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

214

28

CASSADY WOODWORKING

446 N SMITHVILLE RD

Contact: Service Manager

DAYTON, OH

US 45431

Page 4 of 4