




OIL ANALYSIS REPORT

Sample Rating Trend

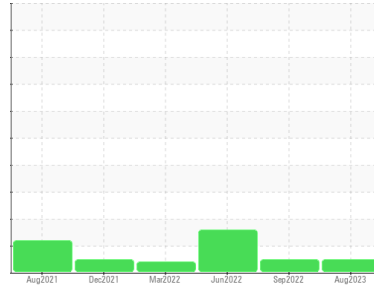

Machine Id
7122292 (S/N 1576)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KC125314	KC96648	KC106134
Sample Date	Client Info	17 Aug 2023	27 Sep 2022	09 Jun 2022
Machine Age	hrs Client Info	16914	14387	12306
Oil Age	hrs Client Info	13081	4762	3000
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		NORMAL	NORMAL	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	0	0	0
Chromium	ppm ASTM D5185m >10	0	0	0
Nickel	ppm ASTM D5185m >3	0	0	0
Titanium	ppm ASTM D5185m >3	0	0	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >10	0	0	0
Lead	ppm ASTM D5185m >10	0	0	<1
Copper	ppm ASTM D5185m >50	6	6	10
Tin	ppm ASTM D5185m >10	0	0	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	0	0
Barium	ppm ASTM D5185m 90	0	0	0
Molybdenum	ppm ASTM D5185m	0	0	0
Manganese	ppm ASTM D5185m	0	0	0
Magnesium	ppm ASTM D5185m 90	0	0	1
Calcium	ppm ASTM D5185m 2	0	0	0
Phosphorus	ppm ASTM D5185m	0	0	0
Zinc	ppm ASTM D5185m	0	0	0

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<1	0	2
Sodium	ppm ASTM D5185m	2	<1	0
Potassium	ppm ASTM D5185m >20	0	0	<1
Water	% ASTM D6304 >0.05	0.007	0.018	0.014
ppm Water	ppm ASTM D6304 >500	76.4	180.7	145.6






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	577	640	12233
Particles >6µm	ASTM D7647 >1300	277	150	▲ 2289
Particles >14µm	ASTM D7647 >80	17	9	▲ 81
Particles >21µm	ASTM D7647 >20	3	3	▲ 27
Particles >38µm	ASTM D7647 >4	1	0	1
Particles >71µm	ASTM D7647 >3	1	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	16/15/11	16/14/10	▲ 21/18/14

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.4	0.43	0.43	0.41


OIL ANALYSIS REPORT

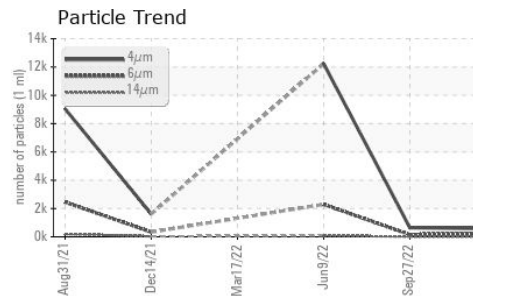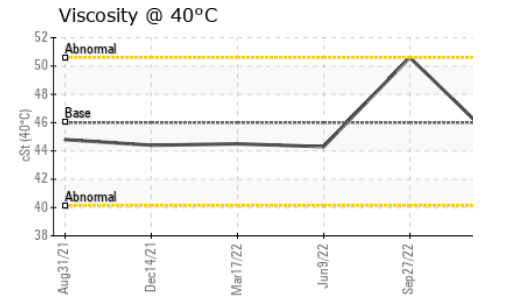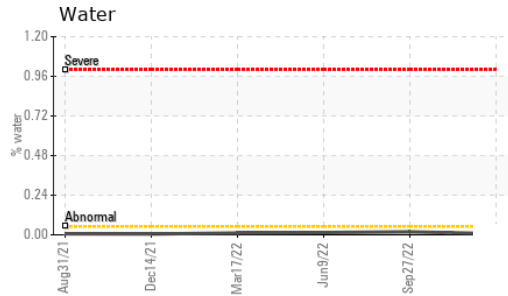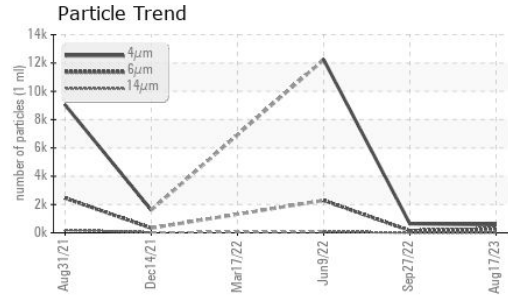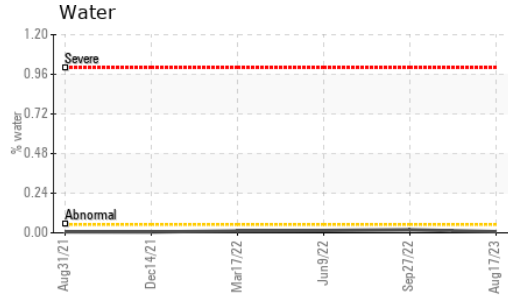






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.7	50.6	44.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

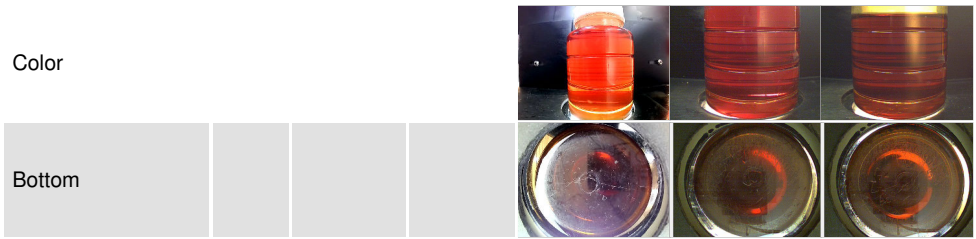

GRAPHS

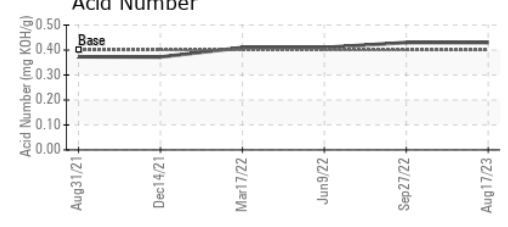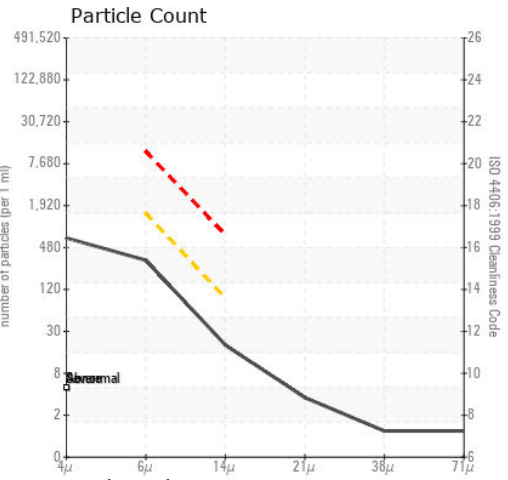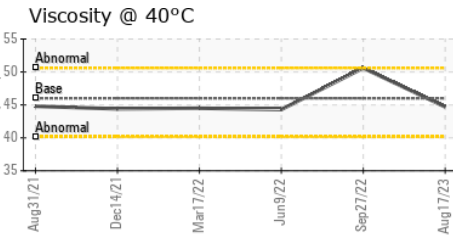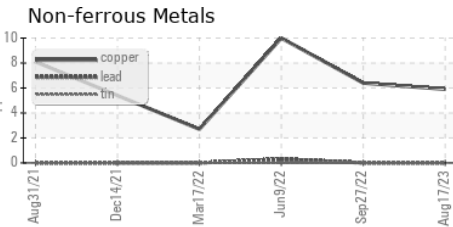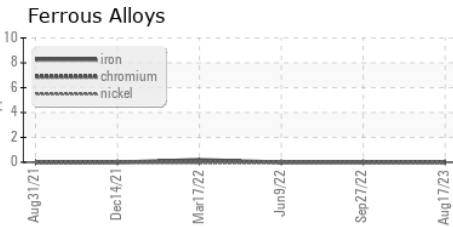

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC125314 **Received** : 21 Aug 2023
Lab Number : 05930380 **Diagnosed** : 23 Aug 2023
Unique Number : 10615651 **Diagnostician** : Jonathan Hester
Test Package : IND 2

NOV
 5870 POE AVE
 DAYTON, OH
 US 45414
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: