




PROBLEM SUMMARY


Sample Rating Trend

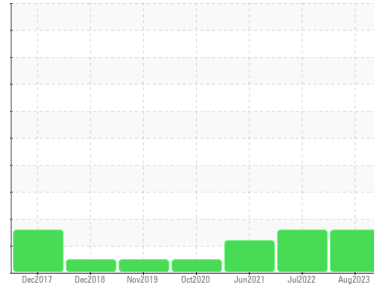

Machine Id
KAESER AS 30T 5885109 (S/N 1325)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

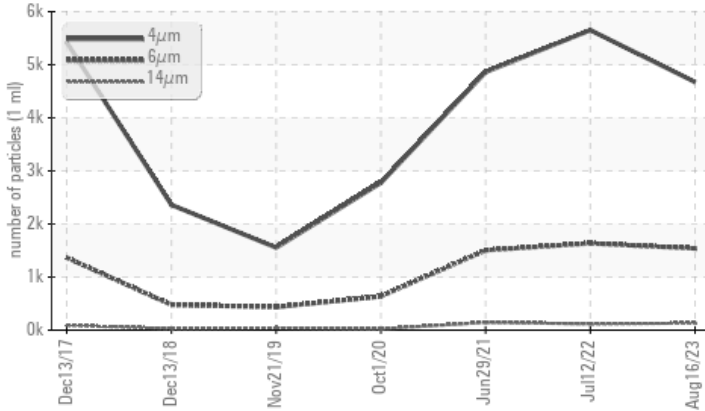

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ATTENTION | ATTENTION | ATTENTION |
|-----------------|--------------|-----------|-------------------|------------|-----------|
| Particles >6µm | ASTM D7647 | >1300 | ▲ 1539 | ▲ 1635 | ▲ 1504 |
| Particles >14µm | ASTM D7647 | >80 | ▲ 132 | ▲ 117 | ▲ 145 |
| Particles >21µm | ASTM D7647 | >20 | ▲ 32 | ▲ 24 | ▲ 48 |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 19/18/14 | ▲ 20/18/14 | ▲ 18/14 |

Customer Id: POLSUW
 Sample No.: KCPA006733
 Lab Number: 05930408
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Fluid | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |

HISTORICAL DIAGNOSIS

12 Jul 2022 Diag: Don Baldrige

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



29 Jun 2021 Diag: Angela Borella

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



01 Oct 2020 Diag: Angela Borella

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

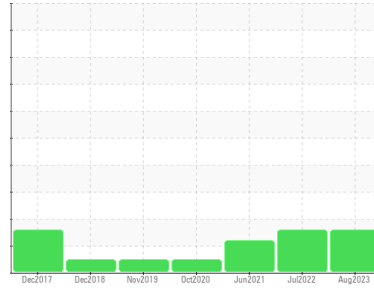

ISO



Machine Id
KAESER AS 30T 5885109 (S/N 1325)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | KCPA006733 | KCP49681 | KCP33243 |
| Sample Date | Client Info | | 16 Aug 2023 | 12 Jul 2022 | 29 Jun 2021 |
| Machine Age | hrs | Client Info | 14487 | 12557 | 10504 |
| Oil Age | hrs | Client Info | 3245 | 2000 | 1587 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | ATTENTION | ATTENTION | ATTENTION |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m >3 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >10 | 0 | <1 | 0 |
| Lead | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >50 | 3 | 3 | 3 |
| Tin | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | --- | --- | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | 0 | 4 |
| Barium | ppm | ASTM D5185m 90 | 3 | 10 | 17 |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m 100 | 77 | 60 | 67 |
| Calcium | ppm | ASTM D5185m 0 | 0 | 0 | <1 |
| Phosphorus | ppm | ASTM D5185m 0 | 3 | 1 | 3 |
| Zinc | ppm | ASTM D5185m 0 | 6 | 5 | 0 |
| Sulfur | ppm | ASTM D5185m 23500 | 24126 | 22830 | 17529 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | <1 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | 23 | 20 | 16 |
| Potassium | ppm | ASTM D5185m >20 | 3 | 0 | 3 |
| Water | % | ASTM D6304 >0.05 | 0.030 | 0.042 | 0.032 |
| ppm Water | ppm | ASTM D6304 >500 | 307.3 | 428.8 | 325.9 |

FLUID CLEANLINESS


| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|------------|----------|
| Particles >4µm | ASTM D7647 | | 4674 | 5652 | 4862 |
| Particles >6µm | ASTM D7647 | >1300 | ▲ 1539 | ▲ 1635 | ▲ 1504 |
| Particles >14µm | ASTM D7647 | >80 | ▲ 132 | ▲ 117 | ▲ 145 |
| Particles >21µm | ASTM D7647 | >20 | ▲ 32 | ▲ 24 | ▲ 48 |
| Particles >38µm | ASTM D7647 | >4 | 1 | 0 | 4 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 19/18/14 | ▲ 20/18/14 | ▲ 18/14 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 1.0 | 0.37 | 0.35 | 0.344 |


OIL ANALYSIS REPORT

▲ Particle Trend

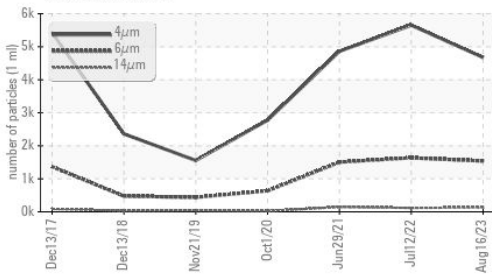

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

Water

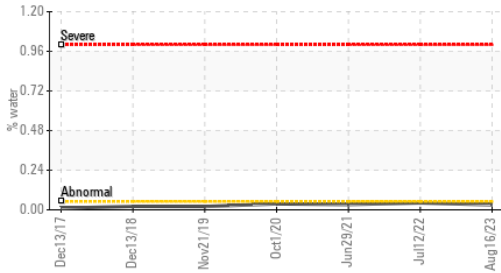


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 45 | 47.6 | 47.0 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|


Color



Bottom

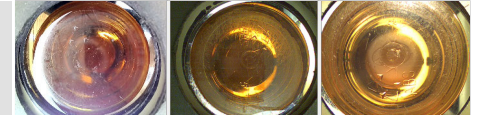


Acid Number

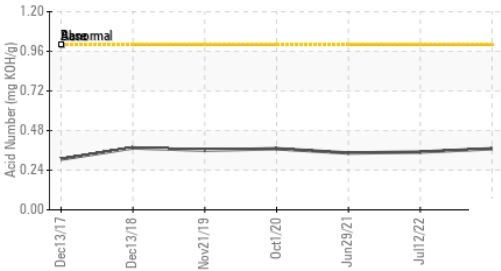


GRAPHS


Ferrous Alloys

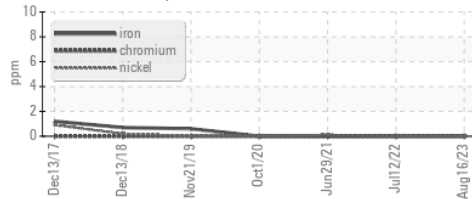


Non-ferrous Metals

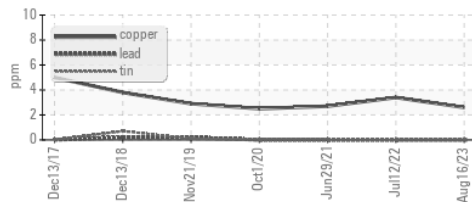


Viscosity @ 40°C

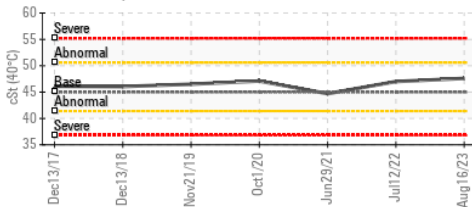

▲ Particle Count

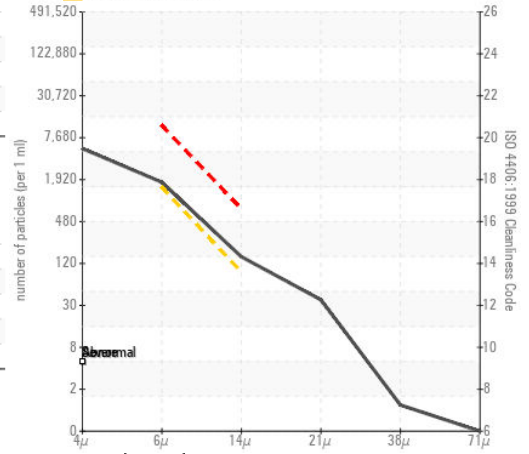

Acid Number

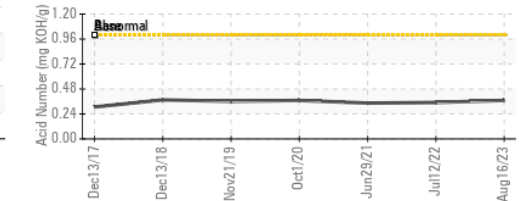

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA006733 **Received** : 21 Aug 2023
Lab Number : 05930408 **Diagnosed** : 23 Aug 2023
Unique Number : 10615679 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

POLYONE CORPORATION
 2900 SHAWNEE INDUSTRIAL WAY
 SUWANEE, GA
 US 30024
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: