




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

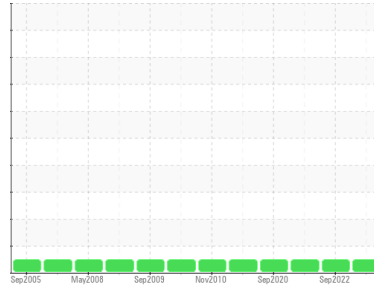

Machine Id  
**GM EMD ANGEL 4**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 710 LE (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0502704</b>	WC0502702	WC0502717
Sample Date	Client Info			<b>13 Aug 2023</b>	30 Sep 2022	01 Oct 2021
Machine Age	hrs	Client Info		<b>4746</b>	4659	4559
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>5</b>	5	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185m	>40	<b>2</b>	1	2
Copper	ppm	ASTM D5185m	>330	<b>7</b>	7	7
Tin	ppm	ASTM D5185m	>15	<b>4</b>	4	3
Antimony	ppm	ASTM D5185m		<b>---</b>	---	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>12</b>	0	6
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>61</b>	64	68
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>12</b>	8	9
Calcium	ppm	ASTM D5185m		<b>3481</b>	3353	3337
Phosphorus	ppm	ASTM D5185m		<b>53</b>	69	66
Zinc	ppm	ASTM D5185m	10	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>3971</b>	3808	2988



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	2
Sodium	ppm	ASTM D5185m		<b>2</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.4</b>	6.7	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.0</b>	17.4	15.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.5</b>	8.2	7.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>9.02</b>	7.85	7.44











# OIL ANALYSIS REPORT

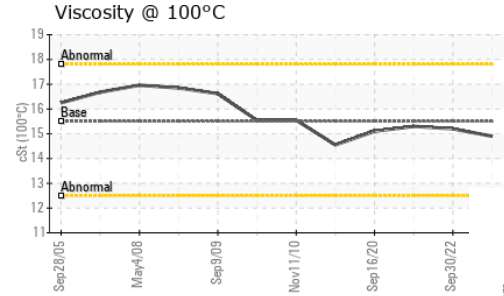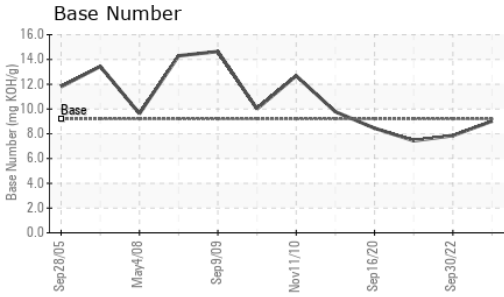

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	14.9	15.2

## GRAPHS

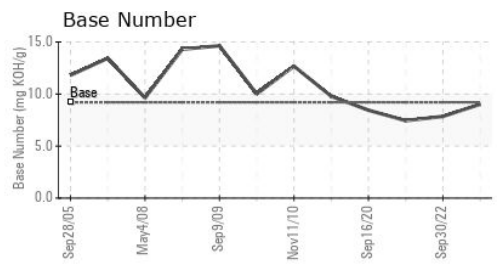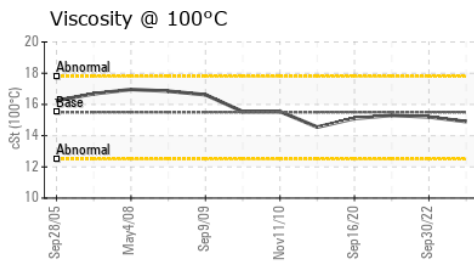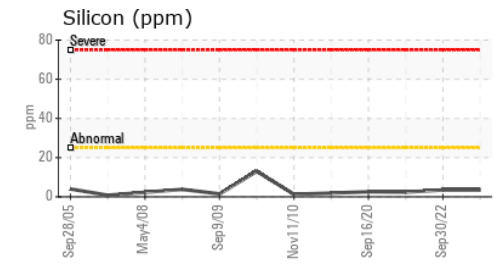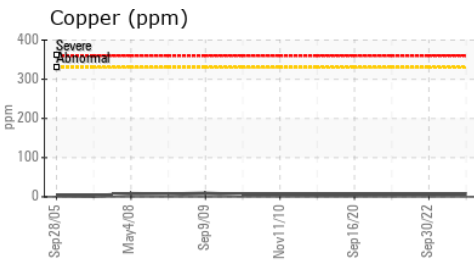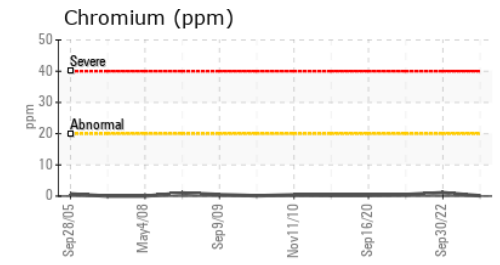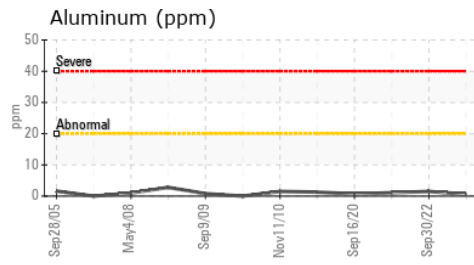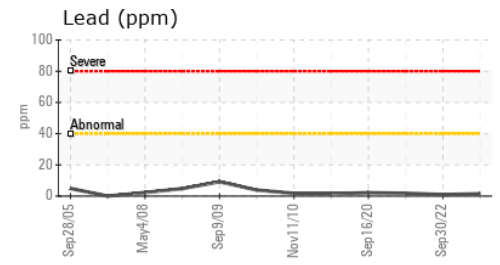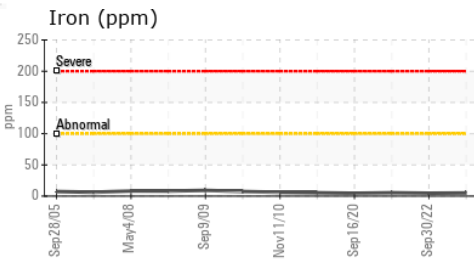

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0502704 **Received** : 21 Aug 2023  
**Lab Number** : 05930499 **Diagnosed** : 22 Aug 2023  
**Unique Number** : 10615770 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**MARSH CREEK LLC**

GAKONA, AK  
 US 99586  
 Contact: TYLER BEGLEY  
 TJBEGLEY@ALASKA.EDU  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)