



# FUEL REPORT

Sample Rating Trend

ADDITIVES



Machine Id  
**KIOTI CK2510 XA0G-00529**

Component  
**Diesel Fuel**  
Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of oil entry. All laboratory tests indicate that this sample meets specifications for No.2 off-road diesel fuel, low sulfur.

### Corrosion

All metal levels are normal indicating no corrosion in the system.

### Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The amount and size of particulates present in the system are acceptable.

### Fuel Condition

Additive levels indicate the addition of oil. Sulfur value derived by ASTM D5453 method for ULSD validation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KT0000569</b>	---	---
Sample Date	Client Info			<b>14 Aug 2023</b>	---	---
Machine Age	hrs	Client Info		<b>26</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298		<b>0.839</b>	---	---
Fuel Color	text	*Visual Screen		<b>Yellow</b>	---	---
ASTM Color	scalar	*ASTM D1500		<b>L1.5</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>2.56</b>	---	---
Pensky-Martens Flash Point	°C	*PMCC Calculated		<b>57</b>	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m		<b>95</b>	---	---
Sulfur (UVF)	ppm	ASTM D5453		<b>70</b>	---	---

DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86		<b>158</b>	---	---
5% Distillation Point	°C	ASTM D86		<b>186</b>	---	---
10% Distill Point	°C	ASTM D86		<b>198</b>	---	---
15% Distillation Point	°C	ASTM D86		<b>207</b>	---	---
20% Distill Point	°C	ASTM D86		<b>215</b>	---	---
30% Distill Point	°C	ASTM D86		<b>230</b>	---	---
40% Distill Point	°C	ASTM D86		<b>245</b>	---	---
50% Distill Point	°C	ASTM D86		<b>259</b>	---	---
60% Distill Point	°C	ASTM D86		<b>274</b>	---	---
70% Distill Point	°C	ASTM D86		<b>289</b>	---	---
80% Distill Point	°C	ASTM D86		<b>307</b>	---	---
85% Distillation Point	°C	ASTM D86		<b>318</b>	---	---
90% Distill Point	°C	ASTM D86		<b>332</b>	---	---
95% Distillation Point	°C	ASTM D86		<b>354</b>	---	---
Final Boiling Point	°C	ASTM D86		<b>361</b>	---	---
Distillation Residue	%	ASTM D86		<b>1.4</b>	---	---
Distillation Loss	%	ASTM D86		<b>0.4</b>	---	---


IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777		<b>37.2</b>	---	---
Cetane Index		ASTM D4737	<40.0	<b>48.5</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m	<0.1	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m	<0.1	<b>0</b>	---	---
Water	%	ASTM D6304	<0.05	<b>0.005</b>	---	---
ppm Water	ppm	ASTM D6304	<500	<b>55.1</b>	---	---
% Gasoline	%	*In-House	<0.50	<b>0.0</b>	---	---
% Biodiesel	%	*In-House	<20.0	<b>0.0</b>	---	---



# FUEL REPORT

### ▲ Additives






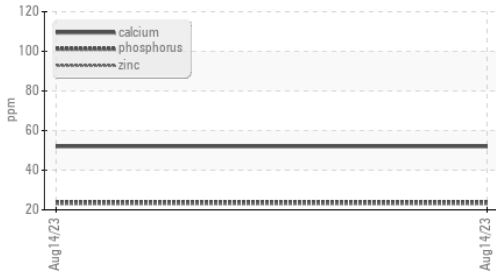


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	<b>1207</b>	---	---
Particles >6µm	ASTM D7647	>640	<b>420</b>	---	---
Particles >14µm	ASTM D7647	>80	<b>42</b>	---	---
Particles >21µm	ASTM D7647	>20	<b>13</b>	---	---
Particles >38µm	ASTM D7647	>4	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	<b>17/16/13</b>	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m <0.1	<b>0</b>	---	---
Lead	ppm	ASTM D5185m <0.1	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m <0.1	<b>&lt;1</b>	---	---
Iron	ppm	ASTM D5185m <0.1	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m <0.1	<b>▲ 52</b>	---	---
Magnesium	ppm	ASTM D5185m <0.1	<b>5</b>	---	---
Phosphorus	ppm	ASTM D5185m <0.1	<b>▲ 24</b>	---	---
Zinc	ppm	ASTM D5185m <0.1	<b>▲ 23</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

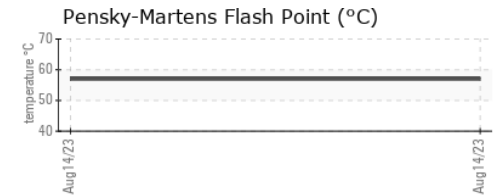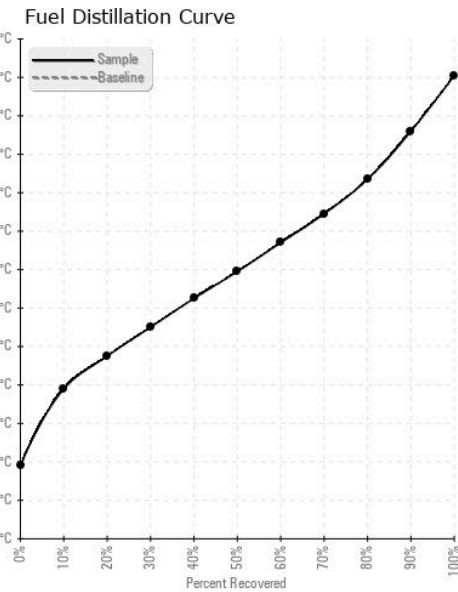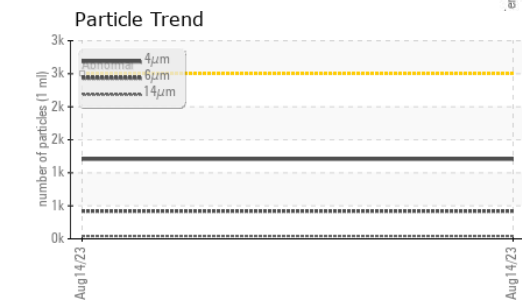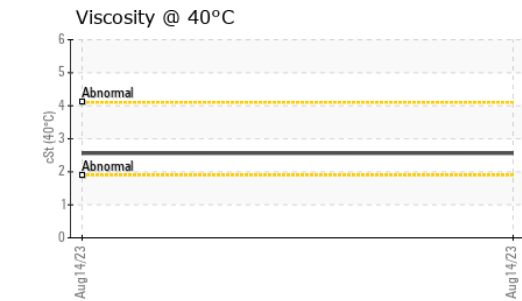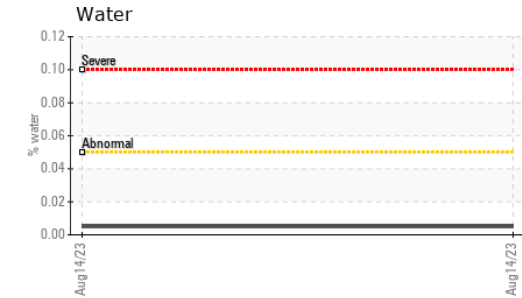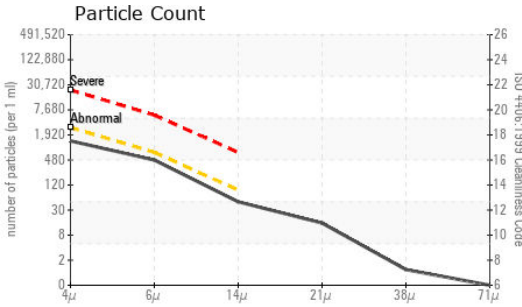

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KT0000569 **Received** : 21 Aug 2023  
**Lab Number** : **05930588** **Diagnosed** : 28 Aug 2023  
**Unique Number** : 10615859 **Diagnostician** : Doug Bogart  
**Test Package** : DF-2 ( Additional Tests: Screen )

**DICKSON TRACTOR**  
 303 G NORTH AVE  
 WESTMINSTER, SC  
 US 29693  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: