




# OIL ANALYSIS REPORT



Area  
**Action Newark**  
Machine Id  
**CATERPILLAR 972M 5600 (S/N LSJ01920)**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

Sample Rating Trend

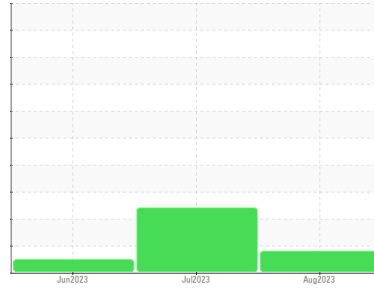

FUEL



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0774697</b>	WC0830937	WC0831052
Sample Date	Client Info	<b>15 Aug 2023</b>	18 Jul 2023	19 Jun 2023
Machine Age	hrs	<b>8901</b>	8584	8347
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>MARGINAL</b>	SEVERE	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>2</b>	5	3
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	3	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	<b>19</b>	14	74
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>61</b>	61	41
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 450	<b>786</b>	790	566
Calcium	ppm	ASTM D5185m 3000	<b>1196</b>	1216	1775
Phosphorus	ppm	ASTM D5185m 1150	<b>963</b>	999	995
Zinc	ppm	ASTM D5185m 1350	<b>1147</b>	1160	1170
Sulfur	ppm	ASTM D5185m 4250	<b>3728</b>	3687	3709

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>3</b>	4	8
Sodium	ppm	ASTM D5185m >216	<b>1</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	0
Fuel	%	ASTM D3524 >5	<b>▲ 4.7</b>	◆ 9.4	<1.0

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.2</b>	6.6	4.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>16.7</b>	17.4	21.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.1</b>	12.6	18.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.8</b>	8.0	10.7











# OIL ANALYSIS REPORT

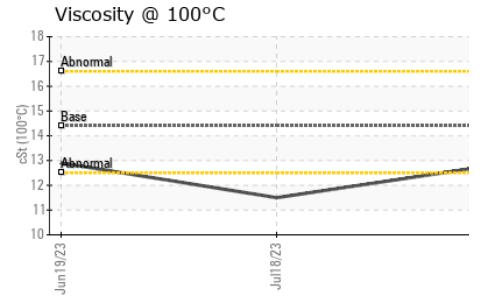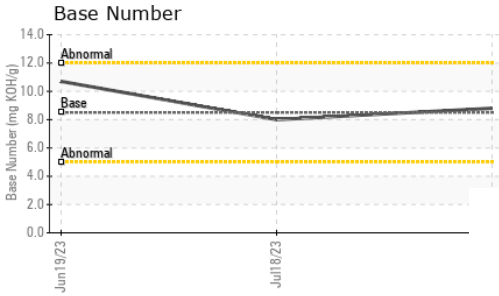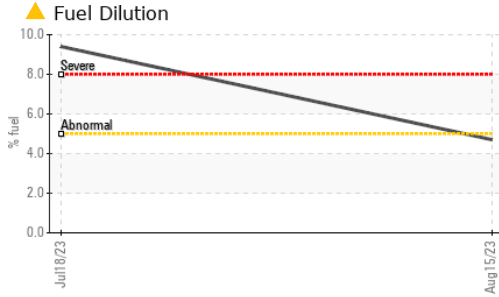

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	▲ 11.5	12.9

### GRAPHS

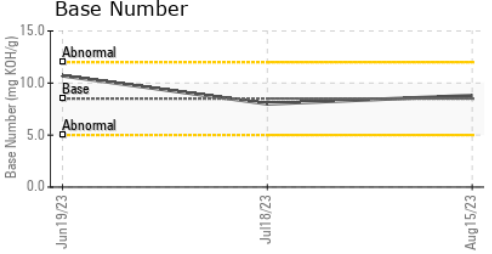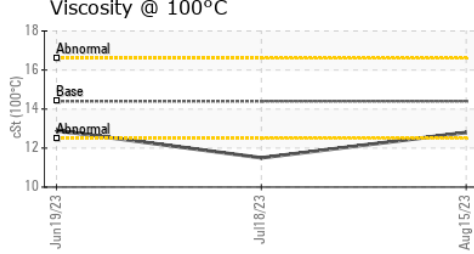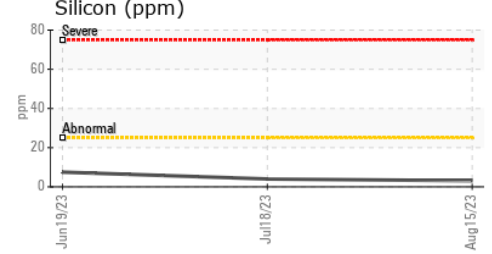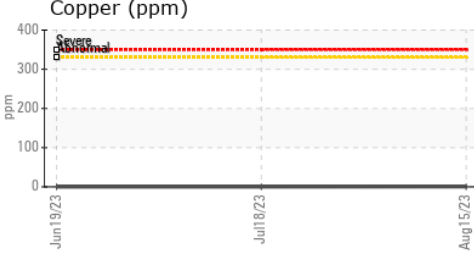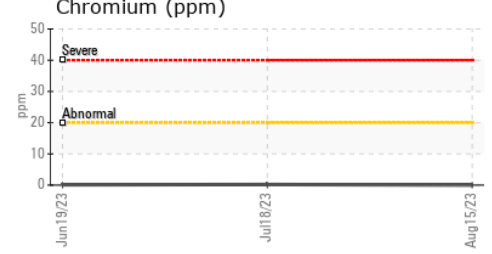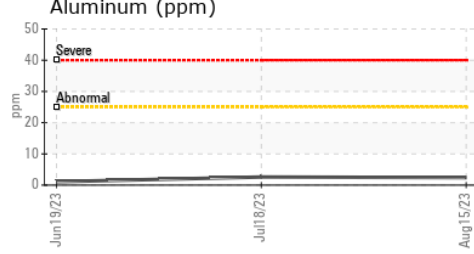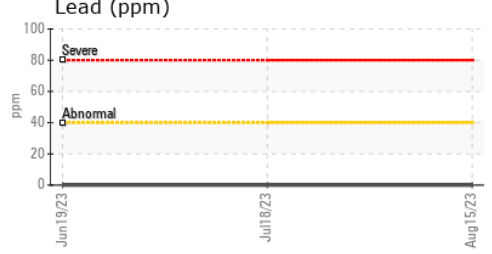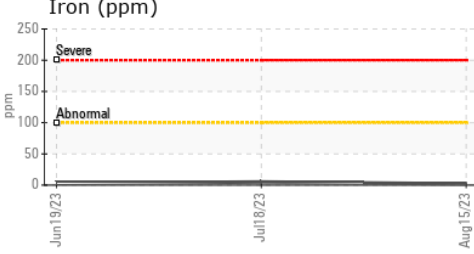

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0774697 **Received** : 22 Aug 2023  
**Lab Number** : 05930630 **Diagnosed** : 24 Aug 2023  
**Unique Number** : 10615901 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel, TBN )

**EVERGREEN RECYCLING SOLUTIONS**  
 110 EVERGREEN AVE  
 NEWARK, NJ  
 US 07114  
 Contact: OPERATIONS  
 OPERATIONS@EVERGREENRECYCLING.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)