




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

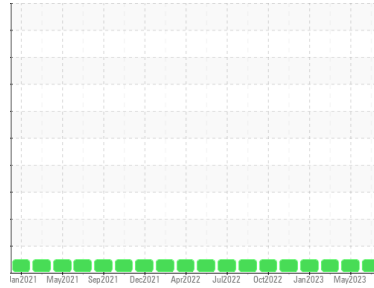

Machine Id
SALVAGNINI SALVAGNINI 4

Component
Hydraulic System

Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PTK0004712	PTK0004085	PTK0004068
Sample Date	Client Info	13 Jul 2023	23 May 2023	28 Mar 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	0
Chromium	ppm	ASTM D5185m >10	0	0
Nickel	ppm	ASTM D5185m >10	0	<1
Titanium	ppm	ASTM D5185m	<1	0
Silver	ppm	ASTM D5185m	0	0
Aluminum	ppm	ASTM D5185m >10	0	0
Lead	ppm	ASTM D5185m >10	0	0
Copper	ppm	ASTM D5185m >75	<1	0
Tin	ppm	ASTM D5185m >10	0	0
Vanadium	ppm	ASTM D5185m	<1	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0
Barium	ppm	ASTM D5185m	0	0
Molybdenum	ppm	ASTM D5185m	0	0
Manganese	ppm	ASTM D5185m	<1	0
Magnesium	ppm	ASTM D5185m	2	0
Calcium	ppm	ASTM D5185m	109	116
Phosphorus	ppm	ASTM D5185m	398	430
Zinc	ppm	ASTM D5185m	31	30
Sulfur	ppm	ASTM D5185m	1569	1725

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	0	0
Sodium	ppm	ASTM D5185m	<1	<1
Potassium	ppm	ASTM D5185m >20	0	0

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	212	759
Particles >6µm	ASTM D7647	>1300	86	190
Particles >14µm	ASTM D7647	>160	18	19
Particles >21µm	ASTM D7647	>40	6	5
Particles >38µm	ASTM D7647	>10	0	0
Particles >71µm	ASTM D7647	>3	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	15/14/11	17/15/11

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.09	0.065

OIL ANALYSIS REPORT


Particle Trend

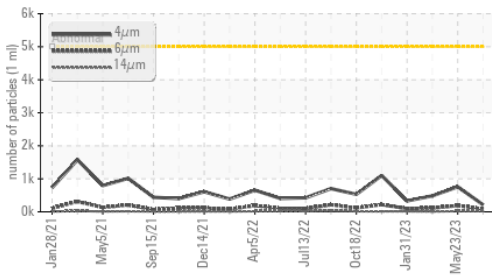


Acid Number

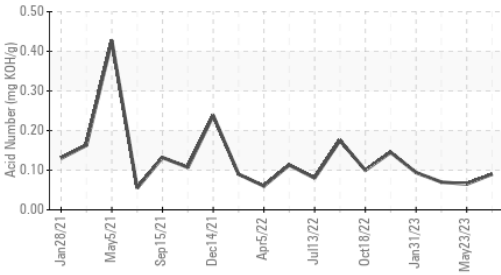

Viscosity @ 40°C

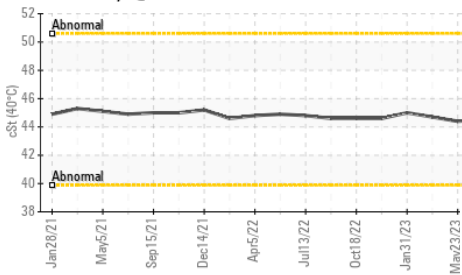


Particle Trend

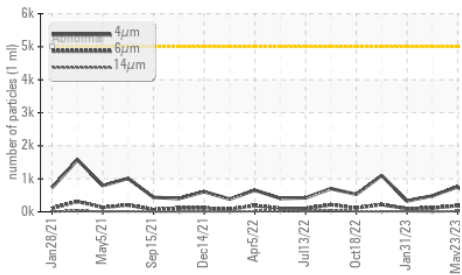





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.5	44.4	44.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

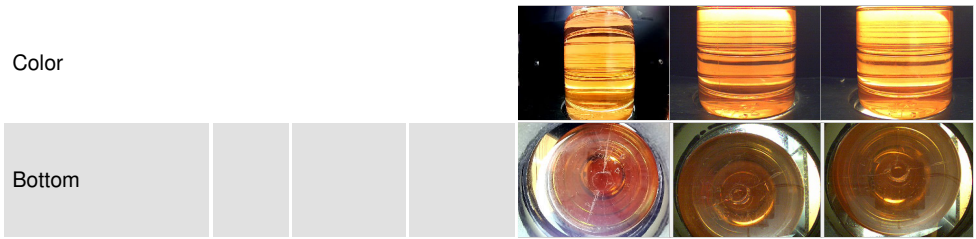

GRAPHS

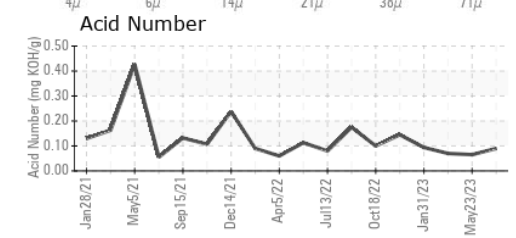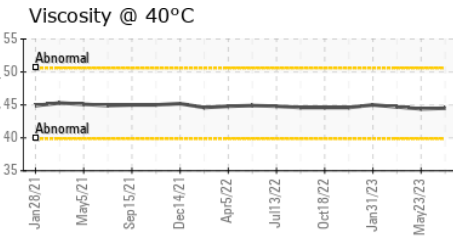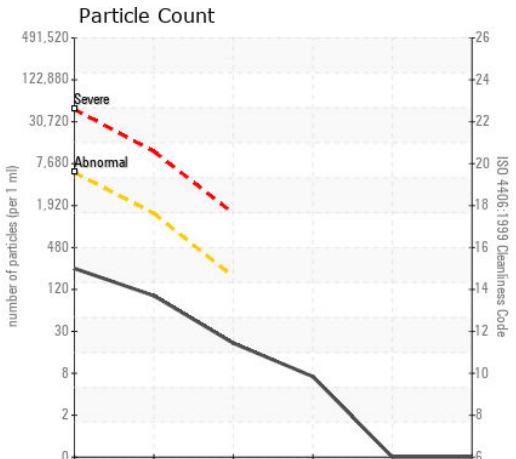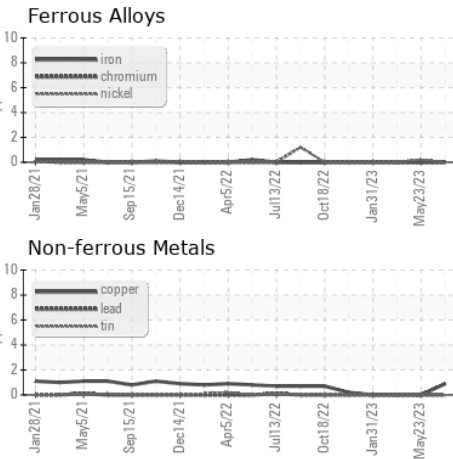

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0004712
Lab Number : 05930838
Unique Number : 10616109
Test Package : MOB 2

Received : 22 Aug 2023
Diagnosed : 23 Aug 2023
Diagnostician : Wes Davis

APG CASH DRAWER
 5250 INDUSTRIAL BLVD NE
 FRIDLEY, MN
 US 55421
 Contact: JARRETT BUCKHOLZ
 jarrett.buckholz@us.cashdrawer.com
 T: (763)571-5000
 F: (763)571-5771

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)