




# OIL ANALYSIS REPORT

Sample Rating Trend

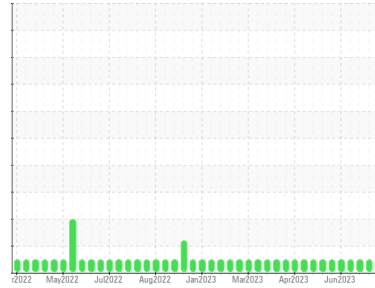

**NORMAL**



Area  
**WP29**  
 Machine Id  
**MVR112-5 effect**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 25 (93 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0843048</b>	WC0843028	WC0843024
Sample Date	Client Info	<b>15 Aug 2023</b>	10 Aug 2023	02 Aug 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>0</b>	<1	<1
Chromium ppm ASTM D5185m	>20	<b>0</b>	0	0
Nickel ppm ASTM D5185m	>20	<b>0</b>	0	0
Titanium ppm ASTM D5185m		<b>&lt;1</b>	0	0
Silver ppm ASTM D5185m		<b>0</b>	0	0
Aluminum ppm ASTM D5185m	>20	<b>0</b>	0	<1
Lead ppm ASTM D5185m	>20	<b>0</b>	<1	0
Copper ppm ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Tin ppm ASTM D5185m	>20	<b>0</b>	0	0
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium ppm ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>0</b>	0	0
Barium ppm ASTM D5185m		<b>0</b>	<1	0
Molybdenum ppm ASTM D5185m		<b>0</b>	0	0
Manganese ppm ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium ppm ASTM D5185m		<b>2</b>	2	2
Calcium ppm ASTM D5185m		<b>123</b>	96	102
Phosphorus ppm ASTM D5185m		<b>488</b>	438	489
Zinc ppm ASTM D5185m		<b>668</b>	645	668
Sulfur ppm ASTM D5185m		<b>3082</b>	2551	2914

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>2</b>	1	<1
Sodium ppm ASTM D5185m		<b>3</b>	0	<1
Potassium ppm ASTM D5185m	>20	<b>0</b>	1	0

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>149</b>	963	621
Particles >6µm ASTM D7647	>1300	<b>56</b>	302	113
Particles >14µm ASTM D7647	>160	<b>15</b>	21	7
Particles >21µm ASTM D7647	>40	<b>7</b>	5	2
Particles >38µm ASTM D7647	>10	<b>1</b>	0	1
Particles >71µm ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>14/13/11</b>	17/15/12	16/14/10

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.90</b>	0.80	0.93




# OIL ANALYSIS REPORT

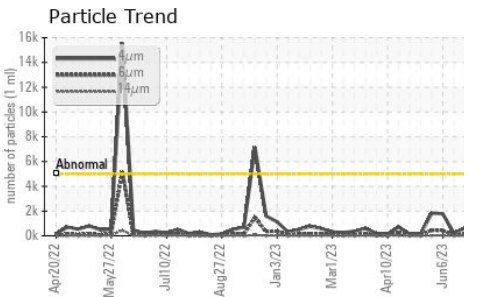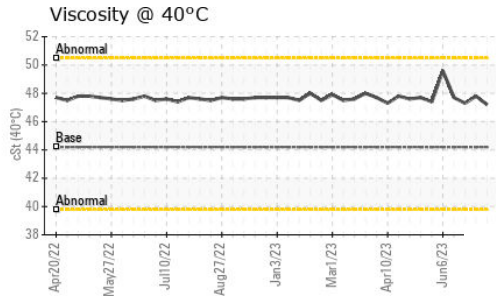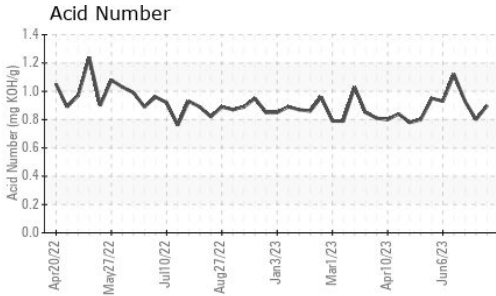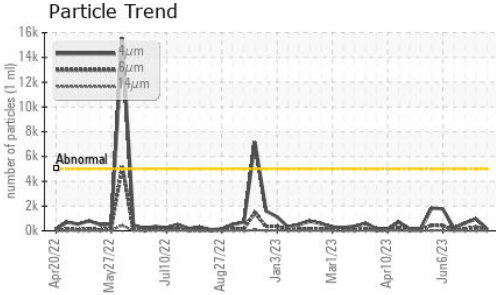






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.2	47.2	47.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

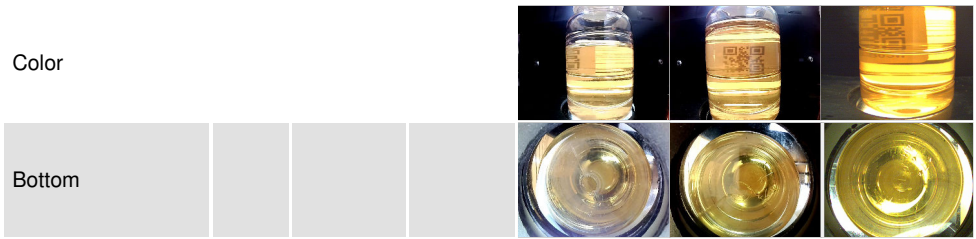

## GRAPHS

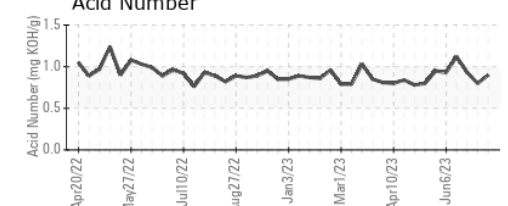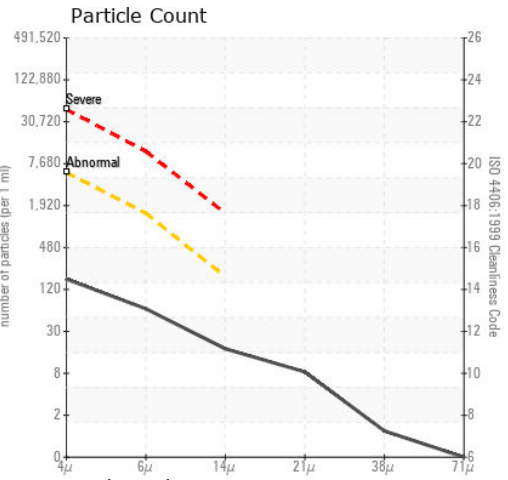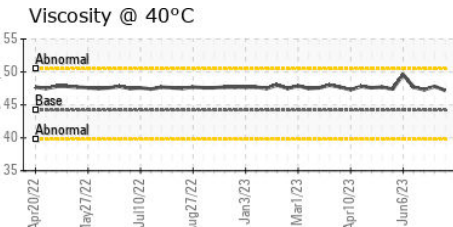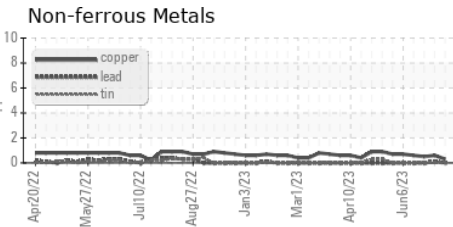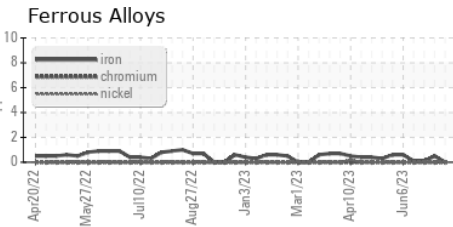

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0843048 Received : 22 Aug 2023  
 Lab Number : 05930841 Diagnosed : 23 Aug 2023  
 Unique Number : 10616112 Diagnostician : Wes Davis  
 Test Package : IND 2

**LEPRINO FOODS-ROSWELL**  
 5600 OMAHA RD  
 ROSWELL, NM  
 US 88203  
 Contact: VINCENT MCINTIRE  
 vmcintire@leprinofoods.com  
 T:  
 F: (505)347-5728

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)