
PROBLEM SUMMARY

Area [187384-N2STV4W] Machine Id CLAVE C 990910 Component

Hydraulic System Fluid NOT GIVEN (10 GAL)

Parker

COMPONENT CONDITION SUMMARY

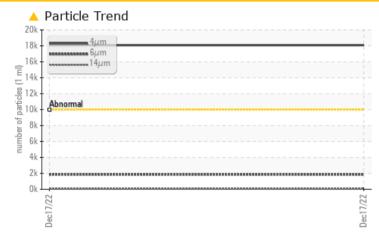

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS				
Sample Status			ATTENTION		
Particles >4µm	ASTM D7647	>10000	<u> </u>		
Oil Cleanliness	ISO 4406 (c)	>20/18/15	A 21/18/14		
PrtFilter				no image	no image


Customer Id: GULSAV Sample No.: PH05930842 Lab Number: 05930842 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

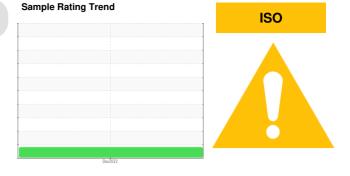

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



Sample Rating Trend

ISO

[187384-N2STV4W] **CLAVE C 990910** Component

Hydraulic System NOT GIVEN (10 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





				Dec2022		
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH05930842		
Sample Date		Client Info		17 Dec 2022		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	3		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		3		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		106		
Phosphorus	ppm	ASTM D5185m		407		
Zinc	ppm	ASTM D5185m		486		
Sulfur	ppm	ASTM D5185m		1716		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		2		
Potaccium	nnm	ASTM D5185m	>20	0		

Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	18082		
Particles >6µm		ASTM D7647	>2500	1854		
Particles >14µm		ASTM D7647	>320	84		
Particles >21µm		ASTM D7647	>80	26		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u> </u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35		



0.00

52

(J-46 44 (40-0) 42 Abr 40.


> 38 Dec17/22

Dec1

Abnorma 50 48

Viscosity @ 40°C

OIL ANALYSIS REPORT

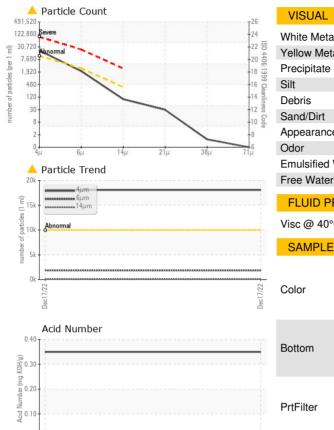

т26	VISUAL		method	limit/base	current	history1	history2
-24	White Metal	scalar	*Visual	NONE	NONE		
-22 8	Yellow Metal	scalar	*Visual	NONE	NONE		
18 5	Precipitate	scalar	*Visual	NONE	NONE		
20 4406:1999 Cleanliness	Silt	scalar	*Visual	NONE	NONE		
-14 1	Debris	scalar	*Visual	NONE	NONE		
+12 s 10 dd	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
21µ 38µ 71µ	Odor	scalar	*Visual	NORML	NORML		
condition in a condition	Emulsified Water	scalar	*Visual	>0.05	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445		45.4		
	SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Dec17/22	Color				·	no image	no image
	Bottom					no image	no image
	PrtFilter					no image	no image
e17/22	GRAPHS Ferrous Alloys			Pa	article Filter (Ma		100 200 ³⁰
	Dec17/22			Dec17/22			
	Non-ferrous Metals	5				•	
				Dec17/22			
	Viscosity @ 40°C			() HO 0.4 Bull 20.2 Provide the first state of the	Acid Number		
	35			Dec17/22 Acid N 00	Dec17/22 0		
ificate 12367 Test Package discuss this sample report, co	: 05930842 E : 10616113 E : PLANT (Additional] ontact Customer Service	Receive Diagnos Diagnos Diagnos Fests: Proce at 1-8	d : 22 / ed : 30 / tician : Dou rtFilter) 800-237-1368	Aug 2023 Aug 2023 ug Bogart 9.	3 GULFS	Sa Contact: J jeff.kilgore@9	TREAM ROA AVANNAH, G US 3140 EFF KILGOR gulfstream.coi
Denotes test methods that are tements of conformity to specifi					(JCGM 106:2012)		(912)965-550 (912)965-348

Contact/Location: JEFF KILGORE - GULSAV